



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L350H 1302 (S/N 1218)
Component
Rear Right Final Drive
Fluid
VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004759	---	---
Sample Date		Client Info		16 May 2024	---	---
Machine Age	hrs	Client Info		541	---	---
Oil Age	hrs	Client Info		541	---	---
Filter Age	hrs	Client Info		541	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1000	129	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>30	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	11	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		116	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		7	---	---
Calcium	ppm	ASTM D5185m		3506	---	---
Phosphorus	ppm	ASTM D5185m		1232	---	---
Zinc	ppm	ASTM D5185m		1429	---	---
Sulfur	ppm	ASTM D5185m		11747	---	---
Visc @ 40°C	cSt	ASTM D445	55	53.8	---	---

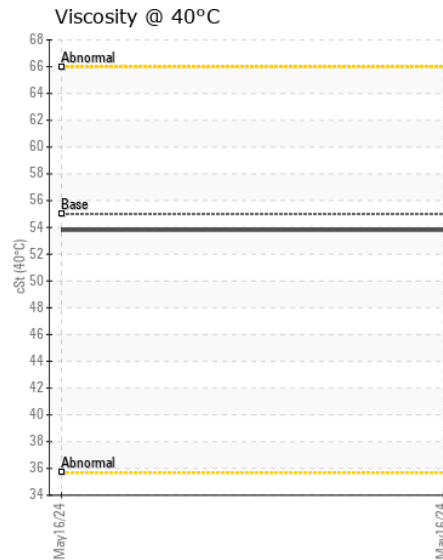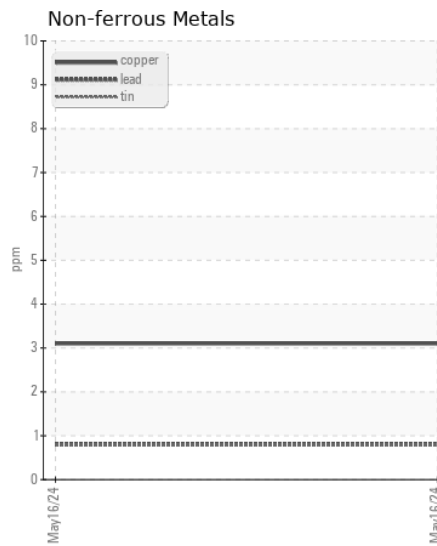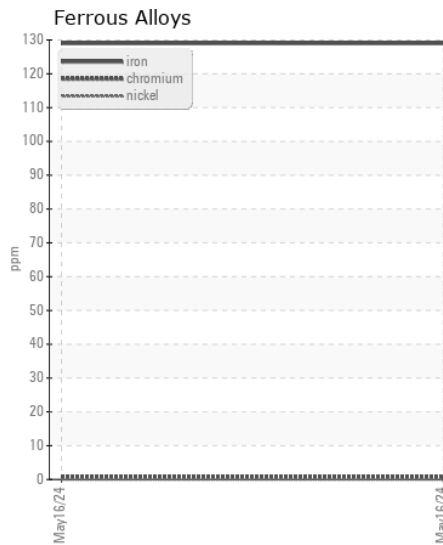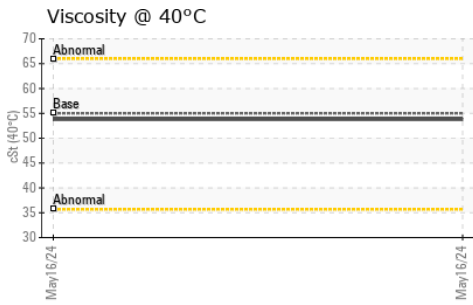

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0004759

Lab Number : 06195743

Unique Number : 11057866

Test Package : CONST

Received : 30 May 2024

Tested : 31 May 2024

Diagnosed : 31 May 2024 - Wes Davis

LANGBOARD INC

HIGHWAY 84 EAST

QUITMAN, GA

US 31643

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (229)263-8943

F: