



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[LJ-1039 PCE-25056]**  
 Machine Id  
**BEECH 404JP (S/N LJ-1039)**  
 Component  
**Right Turbine**  
 Fluid  
**BP TURBO OIL 2380 (12 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: LJ-1039 PCE-25056 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GF0001697</b>	GF0000976	GF0000290
Sample Date		Client Info		<b>28 May 2024</b>	04 Apr 2023	14 Apr 2021
TSN	hrs	Client Info		<b>9396</b>	9316	9166
TSO	hrs	Client Info		<b>9396</b>	1688	0
Oil Age	hrs	Client Info		<b>9396</b>	1688	9166
Filter Age	hrs	Client Info		<b>801</b>	700	571
Oil Changed		Client Info		<b>Not Changed</b>	N/A	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	N/A	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>1</b>	<1	0
Lead	ppm	ASTM D5185m		<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	<b>7</b>	7	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Water		WC Method	>0.03	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	<1
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	1	0
Calcium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m	2500	<b>2578</b>	2696	2492
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	0	<b>93</b>	0	90
Visc @ 40°C	cSt	ASTM D445	24.2	<b>24.2</b>	24.0	24.2

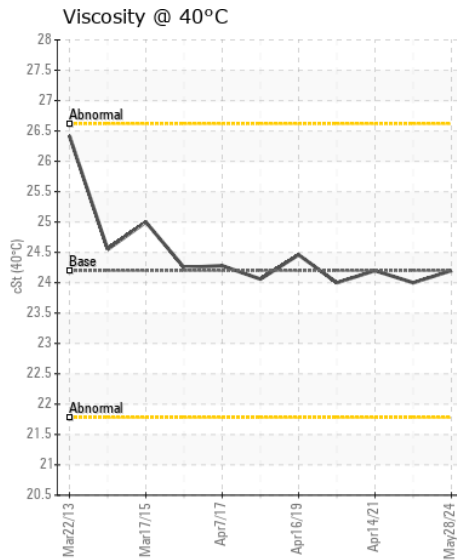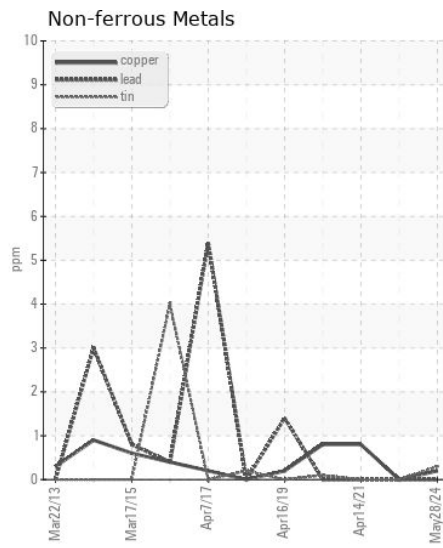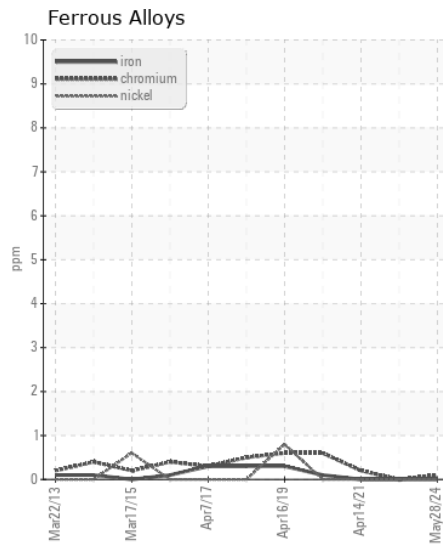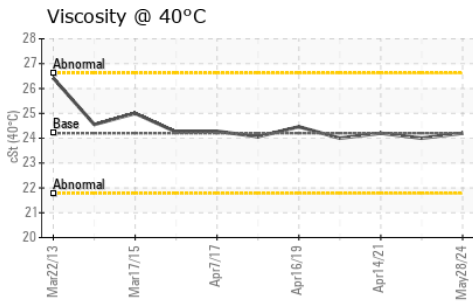

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GF0001697  
**Lab Number** : 06195846  
**Unique Number** : 11057969  
**Test Package** : AVI 1

**Received** : 30 May 2024  
**Tested** : 05 Jun 2024  
**Diagnosed** : 05 Jun 2024 - Don Baldrige

**STEVENS AEROSPACE AND DEFENSE SYSTEMS, LLC**  
 1280 THUNDERBIRD DR  
 SMYRNA, TN  
 US 37167

Contact: PATRICK ISRAEL  
 pisrael@stevensaerospace.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (615)365-2132  
 F: (615)365-0966