



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(57KM8B)

Machine Id

720023-310080

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0120152	GFL0117250	GFL0114029
Sample Date		Client Info		29 May 2024	03 May 2024	15 Mar 2024
Machine Age	hrs	Client Info		9984	9847	9564
Oil Age	hrs	Client Info		0	0	600
Filter Age	hrs	Client Info		0	0	600
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	45	16
Chromium	ppm	ASTM D5185m	>20	<1	3	0
Nickel	ppm	ASTM D5185m	>4	0	1	0
Titanium	ppm	ASTM D5185m		<1	1	0
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	2	5	1
Lead	ppm	ASTM D5185m	>40	<1	2	0
Copper	ppm	ASTM D5185m	>330	<1	17	0
Tin	ppm	ASTM D5185m	>15	<1	2	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	11	10	3
Potassium	ppm	ASTM D5185m	>20	2	▲ 26	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	1.4	1.6
Nitration	Abs/cm	*ASTM D7624	>20	7.8	14.1	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	25.3	21.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	▲ 188	25
Boron	ppm	ASTM D5185m	0	3	14	7
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	60	62	50	57
Manganese	ppm	ASTM D5185m	0	0	2	0
Magnesium	ppm	ASTM D5185m	1010	931	613	888
Calcium	ppm	ASTM D5185m	1070	1133	1495	1190
Phosphorus	ppm	ASTM D5185m	1150	1086	824	1005
Zinc	ppm	ASTM D5185m	1270	1224	1007	1174
Sulfur	ppm	ASTM D5185m	2060	3295	2862	3456
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.0	24.5	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.8	5.9	9.5
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	12.9	14.4


FT-IR (Direct Trend)

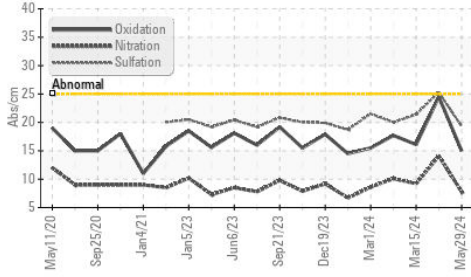


Base Number

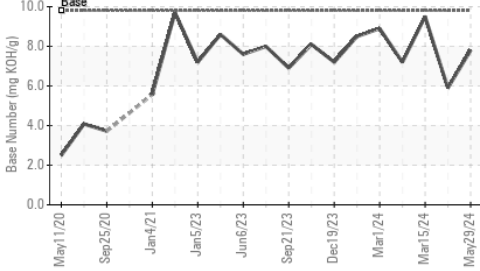


Viscosity @ 100°C

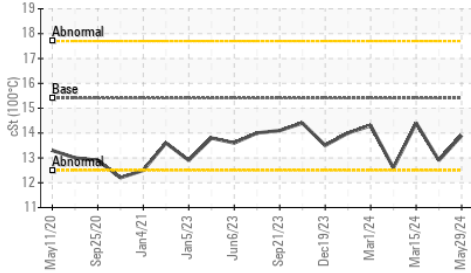


Ferrous Alloys

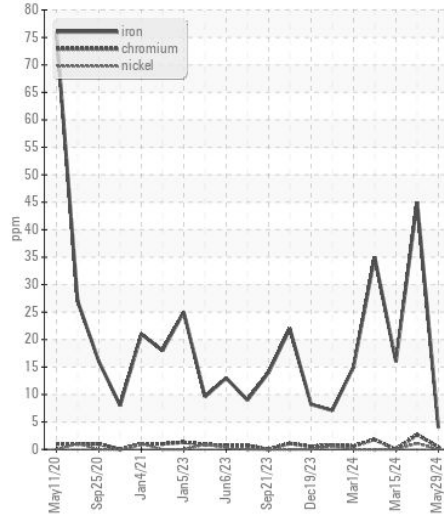


Non-ferrous Metals

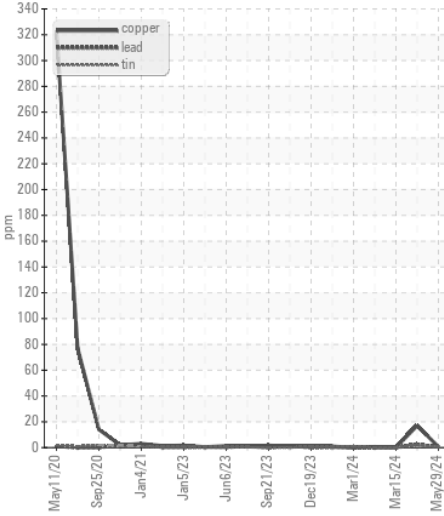

Viscosity @ 100°C

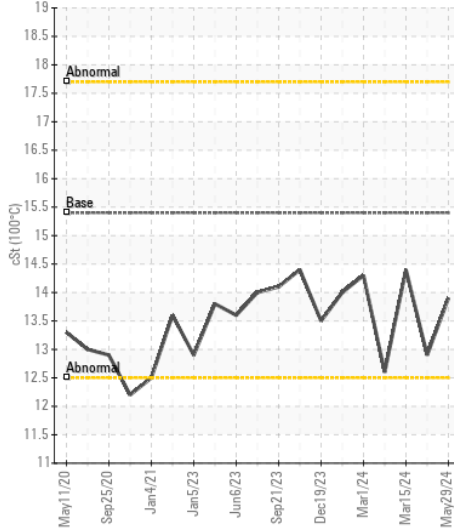

Base Number

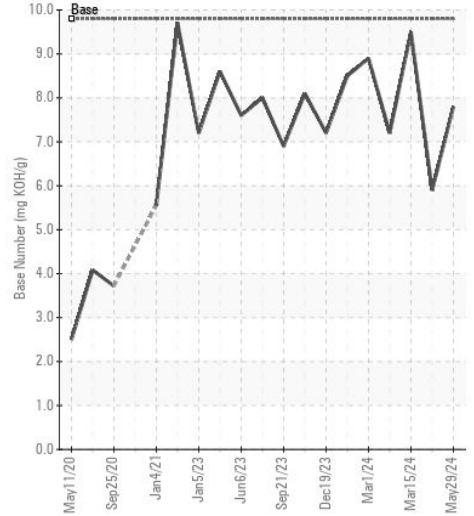

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0120152
Lab Number : 06196308
Unique Number : 11058431
Test Package : FLEET

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Wes Davis

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: SARA PATRICK
 spatrick@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)