



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**KENWORTH T800 350 (S/N BXS021929)**  
 Component  
**Diesel Engine**  
 Fluid  
**SHELL ROTELLA T 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0917132</b>	WC0850989	WC0822276
Sample Date		Client Info		<b>28 May 2024</b>	13 Dec 2023	29 Aug 2023
Machine Age	mls	Client Info		<b>40483</b>	33371	272410
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>18</b>	20	41
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	17
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	1
Copper	ppm	ASTM D5185m	>330	<b>111</b>	13	38
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	11	46
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	5.6	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.1</b>	18.1	18.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	4	4
Boron	ppm	ASTM D5185m	316	<b>27</b>	37	30
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	1.2	<b>29</b>	52	55
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	24	<b>301</b>	589	642
Calcium	ppm	ASTM D5185m	2292	<b>1941</b>	1491	1645
Phosphorus	ppm	ASTM D5185m	1064	<b>1020</b>	1054	1007
Zinc	ppm	ASTM D5185m	1160	<b>1157</b>	1188	1263
Sulfur	ppm	ASTM D5185m	4996	<b>3918</b>	3313	3868
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>11.4</b>	13.1	13.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>7.2</b>	8.6	8.5
Visc @ 100°C	cSt	ASTM D445	15.7	<b>13.3</b>	13.6	13.7

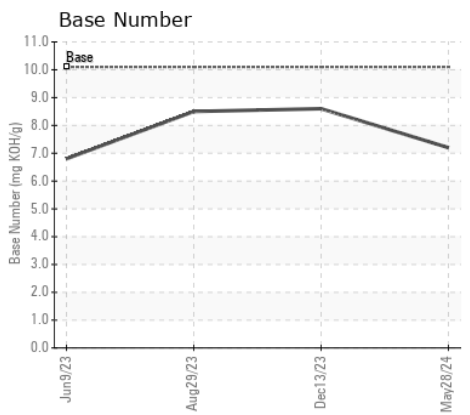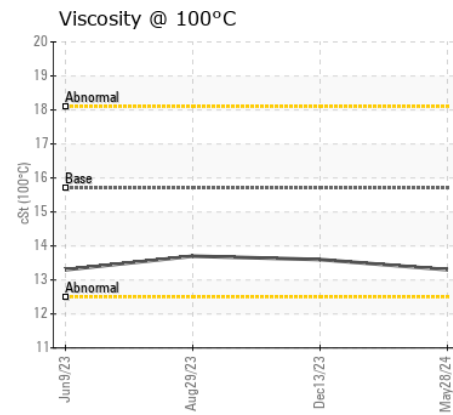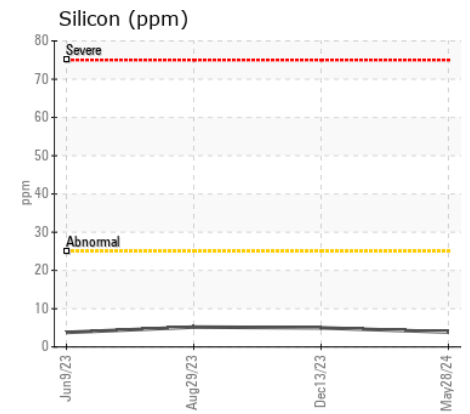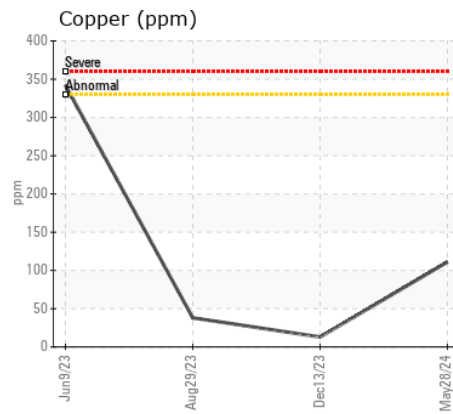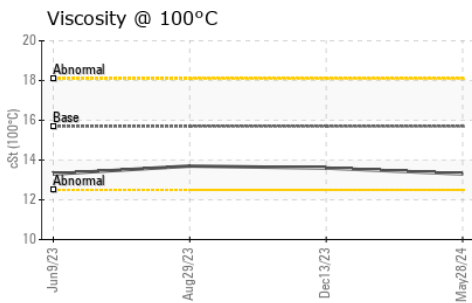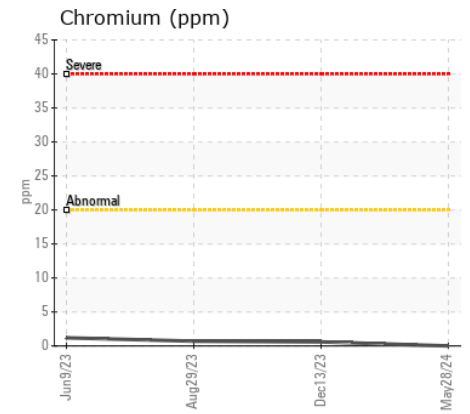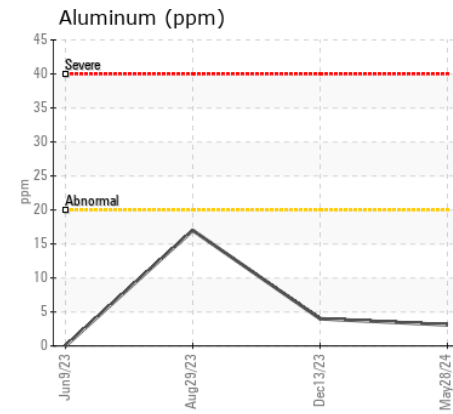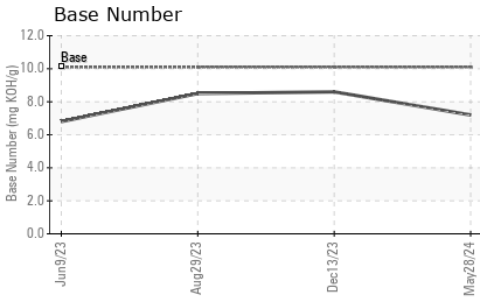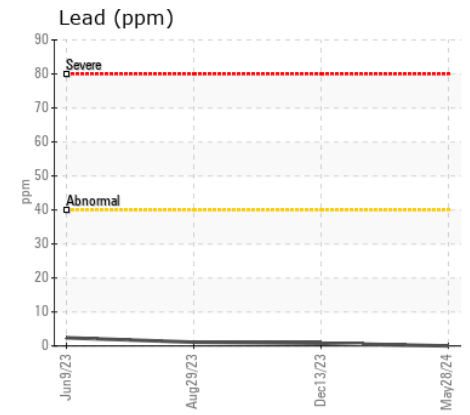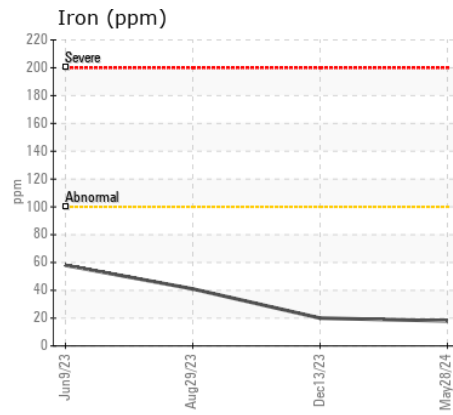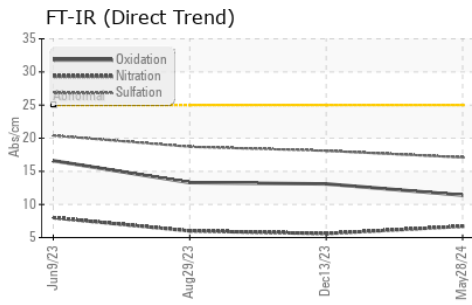

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0917132 **Received** : 31 May 2024  
**Lab Number** : 06196479 **Tested** : 03 Jun 2024  
**Unique Number** : 11058602 **Diagnosed** : 03 Jun 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**JOHNSON BREEDERS**  
 3425 HWY 117N  
 ROSE HILL, NC  
 US 28458

Contact: GREG JONES  
 gregory.jones@houseofraeford.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)289-6884

F: