



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH W900 279335
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (12 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RW0004906	RW0004368	RW0004382
Sample Date		Client Info		22 May 2024	01 Nov 2023	30 May 2023
Machine Age	mls	Client Info		147378	284019	121677
Oil Age	mls	Client Info		14315	4950	11463
Filter Age	mls	Client Info		14315	4950	11463
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	19	21	26
Chromium	ppm	ASTM D5185m	>5	2	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	2
Lead	ppm	ASTM D5185m	>150	1	<1	0
Copper	ppm	ASTM D5185m	>90	1	<1	<1
Tin	ppm	ASTM D5185m	>5	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	7	5	6
Potassium	ppm	ASTM D5185m	>20	6	4	4
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>7.5	0.5	0.8	0.8
Nitration	Abs/cm	*ASTM D7624	>20	10.0	10.7	11.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	23.7	25.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	3
Boron	ppm	ASTM D5185m	0	44	30	43
Barium	ppm	ASTM D5185m	0	2	0	0
Molybdenum	ppm	ASTM D5185m	0	45	47	40
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	542	595	578
Calcium	ppm	ASTM D5185m		1860	2002	1778
Phosphorus	ppm	ASTM D5185m		928	881	764
Zinc	ppm	ASTM D5185m		1039	1056	966
Sulfur	ppm	ASTM D5185m		2921	3226	2973
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.5	22.3	23.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	8.36	8.42	9.94
Visc @ 100°C	cSt	ASTM D445	14	13.4	13.6	13.4

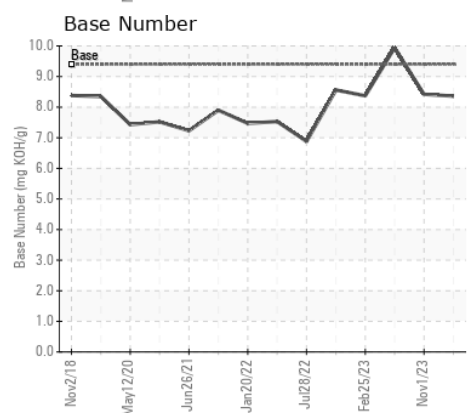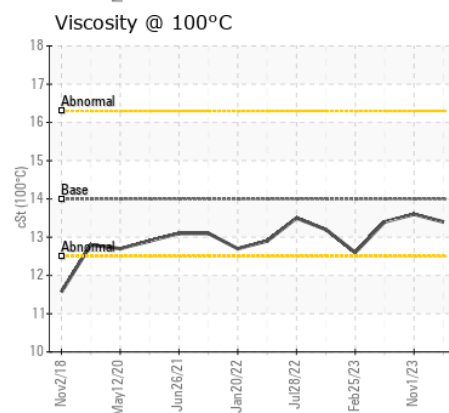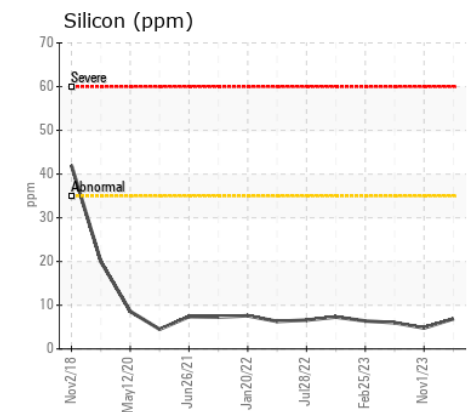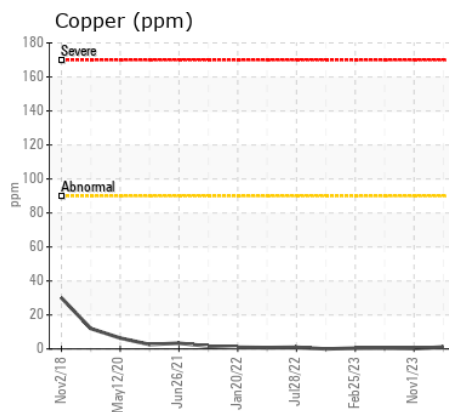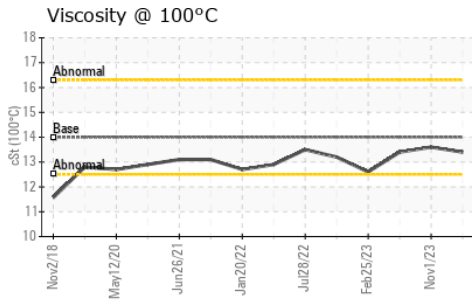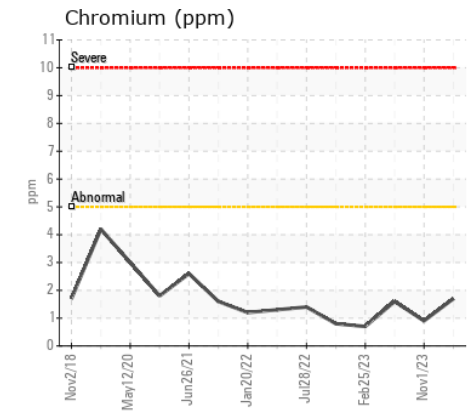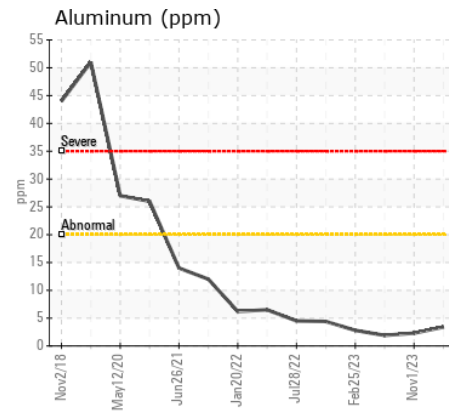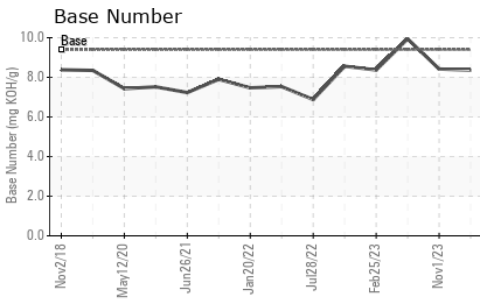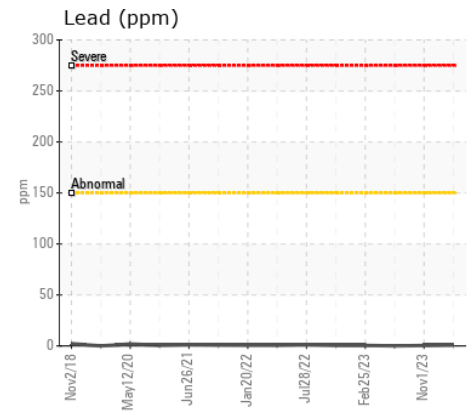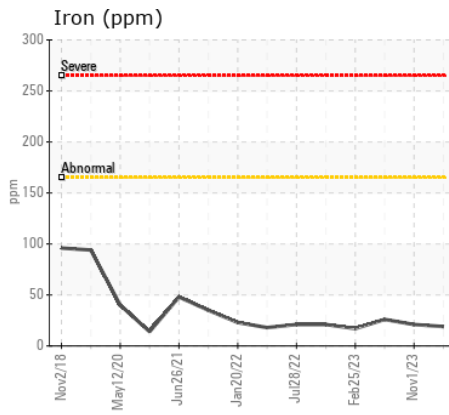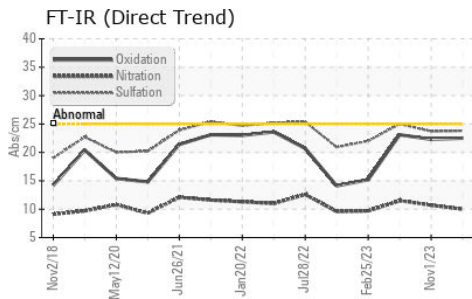

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0004906
Lab Number : 06196864
Unique Number : 11058987
Test Package : MOB 2
Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Wes Davis

HOMER CONCRETE
 205 S CEDAR ST
 IMLAY CITY, MI
 US 48444
 Contact: DENNIS ONDRAJKA
 homerconcrete@aol.com
 T: (810)724-3905
 F: (810)724-0733

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)