



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(P658095)

Machine Id

10897C

Component

Natural Gas Engine

Fluid

PETRO CANADA DURON GEO LD 15W40 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Meter is incorrect old reading was 13380 new reading 38874 will update you when meter is corrected)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0109576	GFL0110366	GFL0069755
Sample Date		Client Info		30 May 2024	16 May 2024	11 Oct 2023
Machine Age	hrs	Client Info		38874	13380	12078
Oil Age	hrs	Client Info		12078	1302	11390
Filter Age	hrs	Client Info		0	1302	11390
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	17	12	8
Chromium	ppm	ASTM D5185m	>4	1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	4	3	1
Lead	ppm	ASTM D5185m	>30	1	2	<1
Copper	ppm	ASTM D5185m	>35	1	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>+100	8	7	9
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	10.5	10.5	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	20.4	17.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		10	6	3
Boron	ppm	ASTM D5185m	50	11	11	26
Barium	ppm	ASTM D5185m	5	0	0	4
Molybdenum	ppm	ASTM D5185m	50	79	57	55
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	560	832	627	572
Calcium	ppm	ASTM D5185m	1510	2140	1577	1384
Phosphorus	ppm	ASTM D5185m	780	1068	764	712
Zinc	ppm	ASTM D5185m	870	1429	1021	889
Sulfur	ppm	ASTM D5185m	2040	3676	2736	2217
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	17.3	14.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	4.4	4.9	6.7
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	14.6	14.1


FT-IR (Direct Trend)

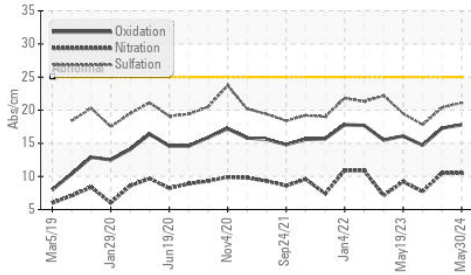


Base Number

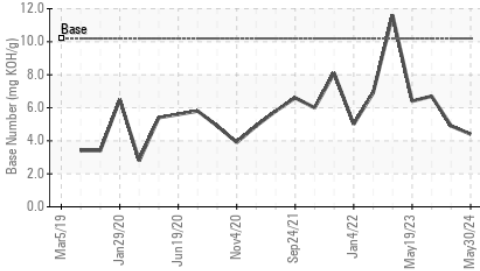


Viscosity @ 100°C

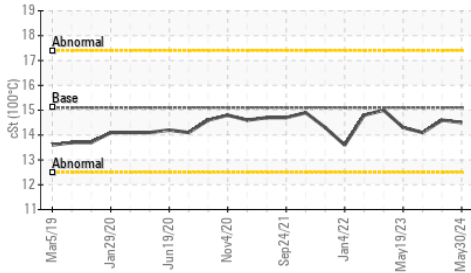


Ferrous Alloys

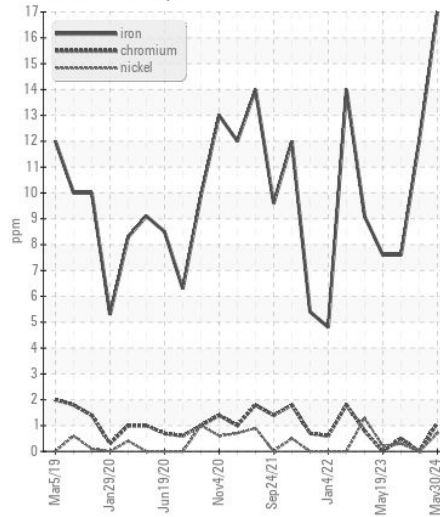


Non-ferrous Metals

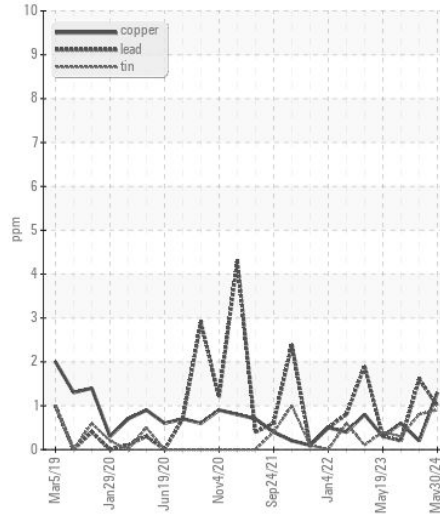

Viscosity @ 100°C

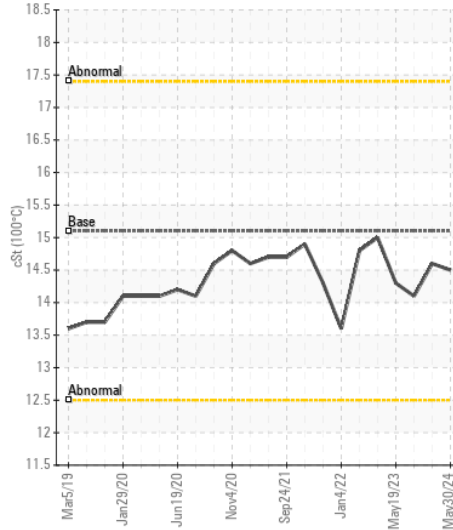

Base Number

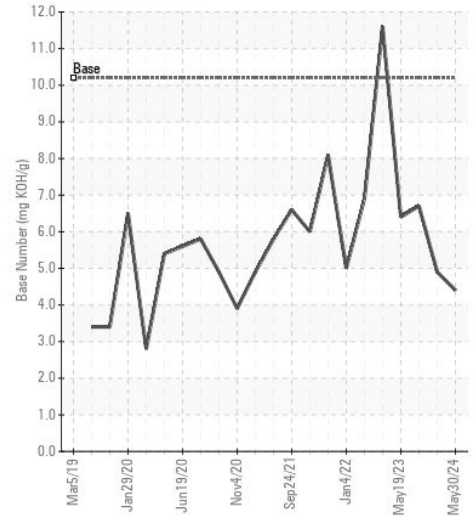

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109576
Lab Number : 06197357
Unique Number : 11059480
Test Package : FLEET

Received : 03 Jun 2024
Tested : 04 Jun 2024
Diagnosed : 04 Jun 2024 - Sean Felton

GFL Environmental - 031 - Greenville/Spartanburg
 1635 Antioch Church Rd
 Piedmont, SC
 US 29673
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: