



|                 |        |
|-----------------|--------|
| WEAR            | NORMAL |
| CONTAMINATION   | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id  
**625072**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 15W40 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>IL0033317</b>   | IL0027083   | IL0027071   |
| Sample Date    |     | Client Info |           | <b>03 Jun 2024</b> | 30 Jan 2024 | 22 Aug 2023 |
| Machine Age    | mls | Client Info |           | <b>147635</b>      | 134619      | 121213      |
| Oil Age        | mls | Client Info |           | <b>13016</b>       | 13406       | 13087       |
| Filter Age     | mls | Client Info |           | <b>13016</b>       | 13406       | 13087       |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

### WEAR

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >100 | <b>8</b>     | 10   | 8    |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>0</b>     | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | 0    |
| Silver       | ppm    | ASTM D5185m | >3   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>3</b>     | 4    | 4    |
| Lead         | ppm    | ASTM D5185m | >40  | <b>&lt;1</b> | 0    | 0    |
| Copper       | ppm    | ASTM D5185m | >330 | <b>1</b>     | 2    | <1   |
| Tin          | ppm    | ASTM D5185m | >15  | <b>&lt;1</b> | 0    | 0    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

### CONTAMINATION

There is no indication of any contamination in the oil.


|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>4</b>       | 5     | 4     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>5</b>       | 4     | 5     |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | 1.1   | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.2</b>     | 0.3   | 0.2   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>9.4</b>     | 10.1  | 9.3   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>22.8</b>    | 21.8  | 22.8  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |     |              |      |      |
|------------------|----------|-------------|-----|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m |     | <b>&lt;1</b> | 2    | 1    |
| Boron            | ppm      | ASTM D5185m | 0   | <b>51</b>    | 63   | 35   |
| Barium           | ppm      | ASTM D5185m | 0   | <b>0</b>     | 11   | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 0   | <b>59</b>    | 75   | 42   |
| Manganese        | ppm      | ASTM D5185m |     | <b>0</b>     | 0    | <1   |
| Magnesium        | ppm      | ASTM D5185m | 0   | <b>518</b>   | 554  | 562  |
| Calcium          | ppm      | ASTM D5185m |     | <b>1558</b>  | 1351 | 1503 |
| Phosphorus       | ppm      | ASTM D5185m |     | <b>676</b>   | 587  | 737  |
| Zinc             | ppm      | ASTM D5185m |     | <b>925</b>   | 898  | 974  |
| Sulfur           | ppm      | ASTM D5185m |     | <b>2806</b>  | 2711 | 3105 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25 | <b>23.5</b>  | 22.3 | 23.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.4 | <b>7.7</b>   | 6.4  | 8.1  |
| Visc @ 100°C     | cSt      | ASTM D445   | 14  | <b>12.3</b>  | 12.4 | 12.7 |


**FT-IR (Direct Trend)**

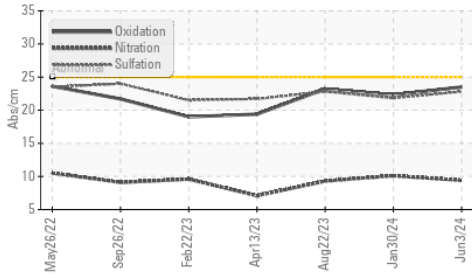


**Ferrous Alloys**

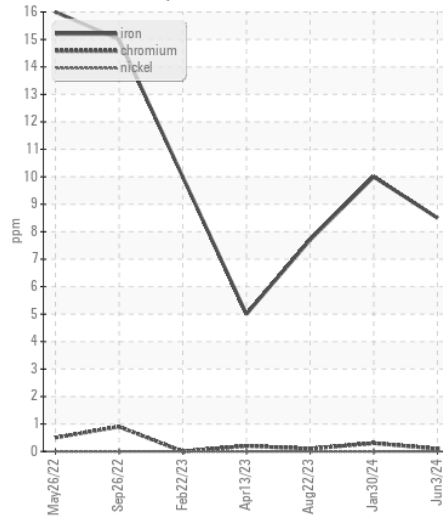


**Base Number**

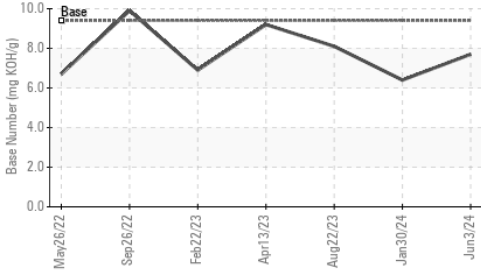


**Non-ferrous Metals**

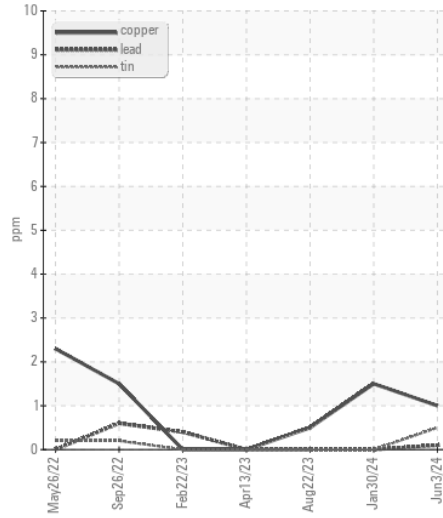


**Viscosity @ 100°C**

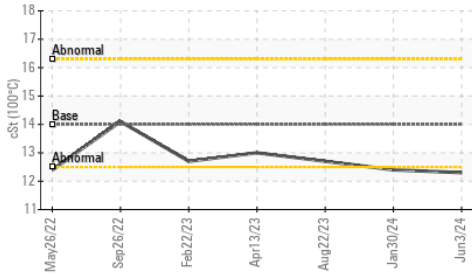

**Viscosity @ 100°C**

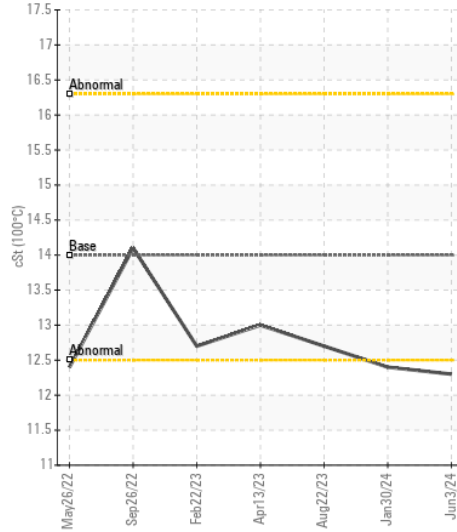

**Base Number**

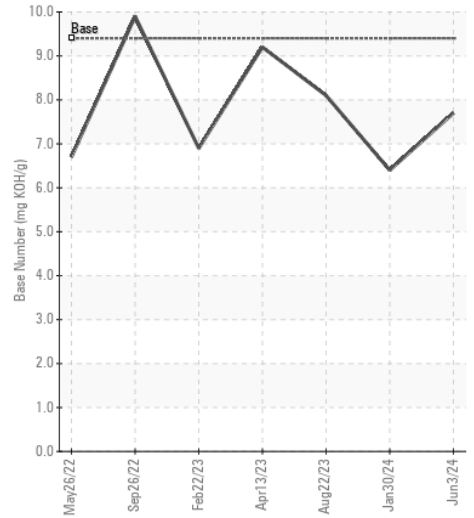

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0033317  
**Lab Number** : 06209858  
**Unique Number** : 11082722  
**Test Package** : FLEET

**Received** : 14 Jun 2024  
**Tested** : 15 Jun 2024  
**Diagnosed** : 15 Jun 2024 - Wes Davis

**RUSH TRUCK LEASING - EFFINGHAM Idealease**  
 1701 WEST FAYETTE AVENUE  
 EFFINGHAM, IL  
 US 62401  
 Contact: JACKIE OHNESORGE  
 ohnesorgej@rushenterprises.com  
 T: (217)342-9761  
 F: (217)342-9642

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)