



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
LEXI BOE [SR001000154]
Machine Id
VOLVO PENTA 3200001366
Component
Port IPS
Fluid
GEAR OIL SAE 75W90 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA064178	VPA028273	---
Sample Date		Client Info		07 Jun 2024	10 Dec 2020	---
Machine Age	hrs	Client Info		173	11	---
Oil Age	hrs	Client Info		0	11	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	SEVERE	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		19	31	---
Iron	ppm	ASTM D5185m	>275	7	41	---
Chromium	ppm	ASTM D5185m	>4	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m	>3	<1	<1	---
Silver	ppm	ASTM D5185m		0	2	---
Aluminum	ppm	ASTM D5185m	>10	1	6	---
Lead	ppm	ASTM D5185m	>4	<1	2	---
Copper	ppm	ASTM D5185m	>30	2	2	---
Tin	ppm	ASTM D5185m	>3	0	6	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	2	8	---
Potassium	ppm	ASTM D5185m	>20	<1	19	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	331	---
Boron	ppm	ASTM D5185m	400	299	418	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	<1	<1	---
Manganese	ppm	ASTM D5185m		<1	4	---
Magnesium	ppm	ASTM D5185m	12	4	607	---
Calcium	ppm	ASTM D5185m	150	70	304	---
Phosphorus	ppm	ASTM D5185m	1650	1353	1448	---
Zinc	ppm	ASTM D5185m	125	27	31	---
Sulfur	ppm	ASTM D5185m	22500	23613	20481	---
Visc @ 40°C	cSt	ASTM D445	109	107	185	---

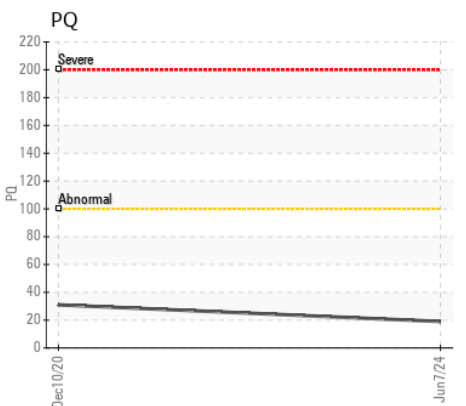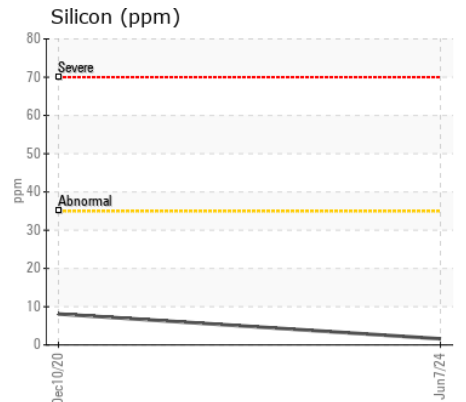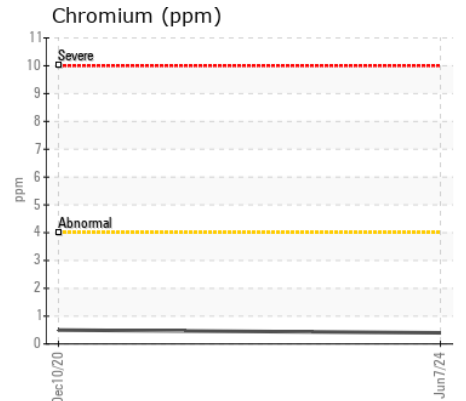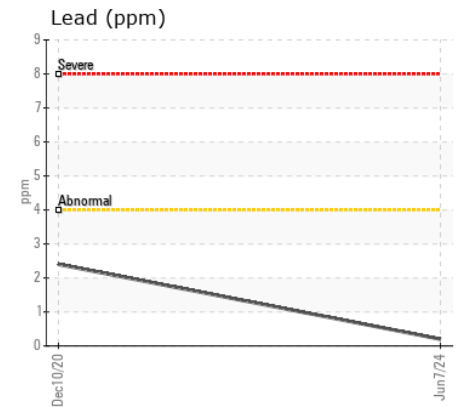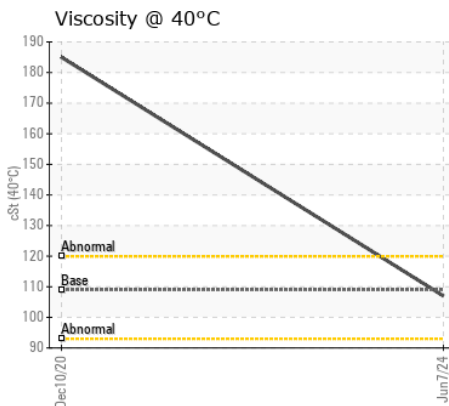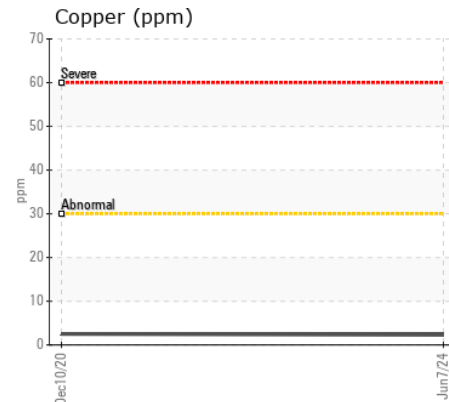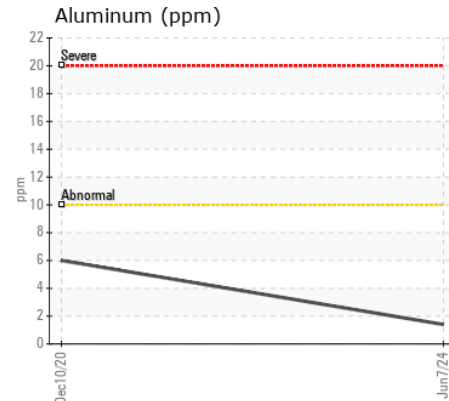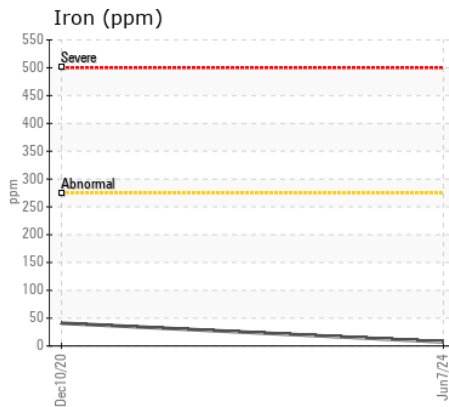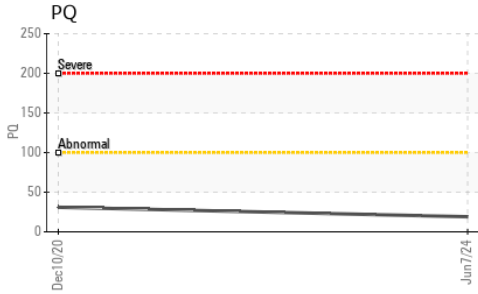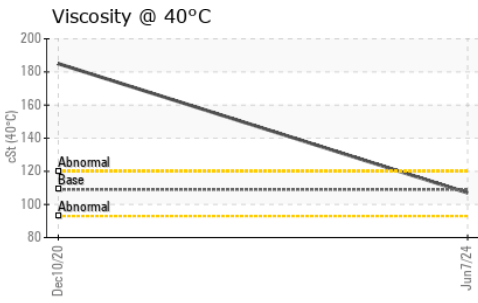

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA064178 **Received** : 14 Jun 2024
Lab Number : 06210463 **Tested** : 17 Jun 2024
Unique Number : 11083327 **Diagnosed** : 18 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: PQ)

Pacific Power Group - VP981534
 7215 S 228th St
 Kent, WA
 US 98032
 Contact: STEVE CAREY
 scarey@pacificpowergroup.com
 T: (253)740-0842
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)