



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
RANDY HOOPER
Machine Id
[RANDY HOOPER] 006 622755-6
Component
Starboard Reduction Gear
Fluid
CHEVRON MEROPA 320 (250 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0064657	MW0067962	MW0064662
Sample Date		Client Info		01 Jun 2024	01 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		78590	78011	77239
Oil Age	hrs	Client Info		5796	5211	4445
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	52	50	39
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	2	1
Lead	ppm	ASTM D5185m	>100	0	<1	1
Copper	ppm	ASTM D5185m	>50	4	4	3
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	1	<1
Potassium	ppm	ASTM D5185m	>20	2	2	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	8	9
Boron	ppm	ASTM D5185m	20	16	19	10
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m	0	1	2	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		2	1	0
Calcium	ppm	ASTM D5185m	25	61	76	15
Phosphorus	ppm	ASTM D5185m	235	329	347	287
Zinc	ppm	ASTM D5185m		19	17	0
Sulfur	ppm	ASTM D5185m		6209	7308	6613
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	0.64	0.65	0.69
Visc @ 40°C	cSt	ASTM D445	304	322	320	320

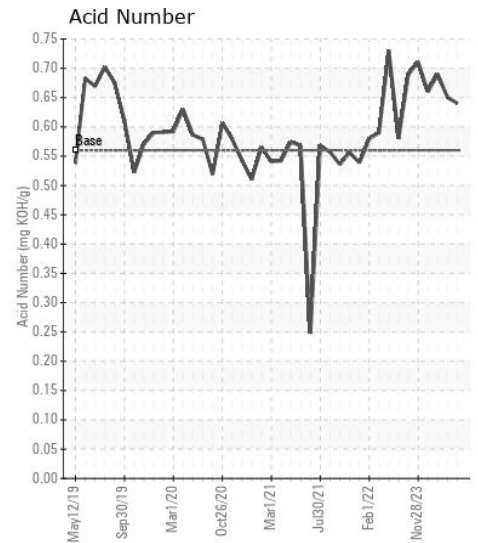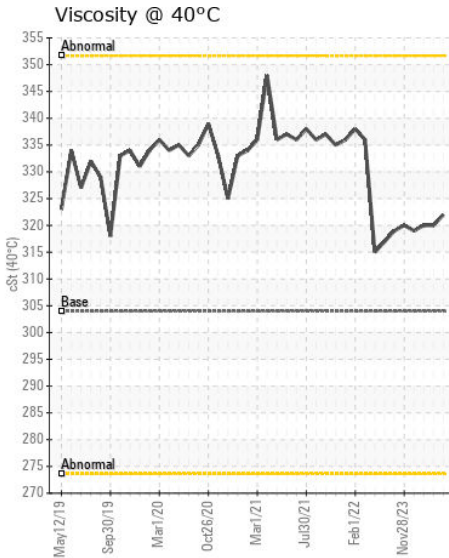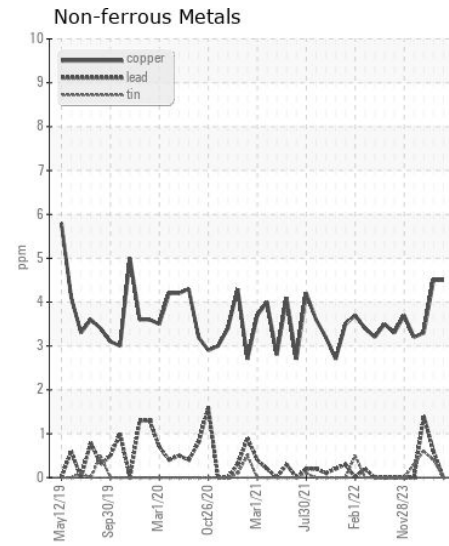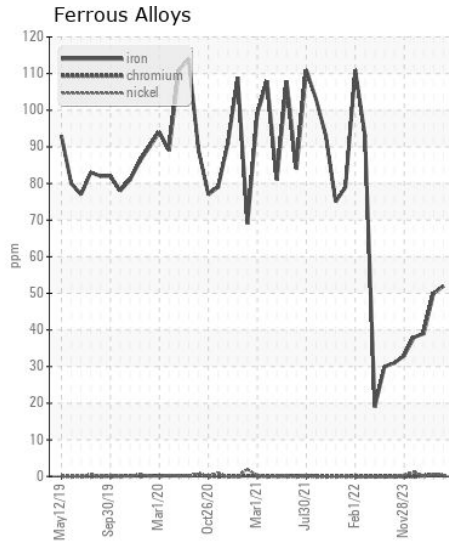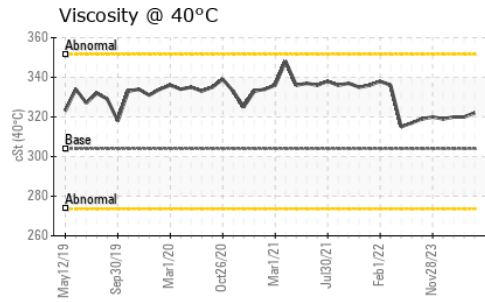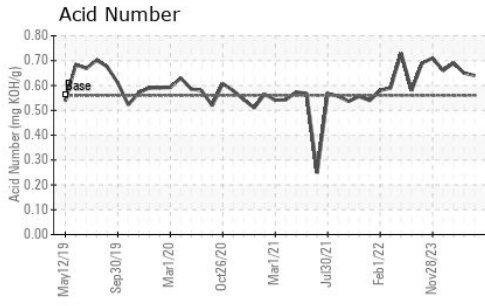

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0064657

Lab Number : 06210863

Unique Number : 11083727

Test Package : MAR 2

Received : 14 Jun 2024

Tested : 18 Jun 2024

Diagnosed : 18 Jun 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: JEFF BISHOP

jeff.bishop@ingrambarge.com

T:

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)