



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 544K 1DW544KZKHF684285
 Component
Gearbox
 Fluid
{not provided} (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222513	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		6030	---	---
Oil Age	hrs	Client Info		982	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		37	---	---
Iron	ppm	ASTM D5185m	>200	212	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>200	10	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	18	---	---
Potassium	ppm	ASTM D5185m	>20	24	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		23	---	---
Boron	ppm	ASTM D5185m		5	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		7	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		114	---	---
Calcium	ppm	ASTM D5185m		3361	---	---
Phosphorus	ppm	ASTM D5185m		1048	---	---
Zinc	ppm	ASTM D5185m		1190	---	---
Sulfur	ppm	ASTM D5185m		4065	---	---
Visc @ 40°C	cSt	ASTM D445		53.15	---	---

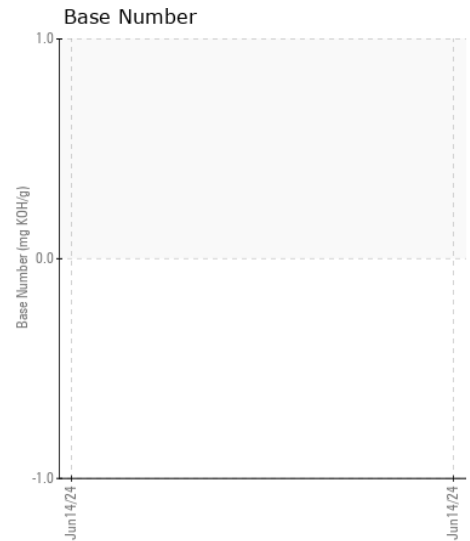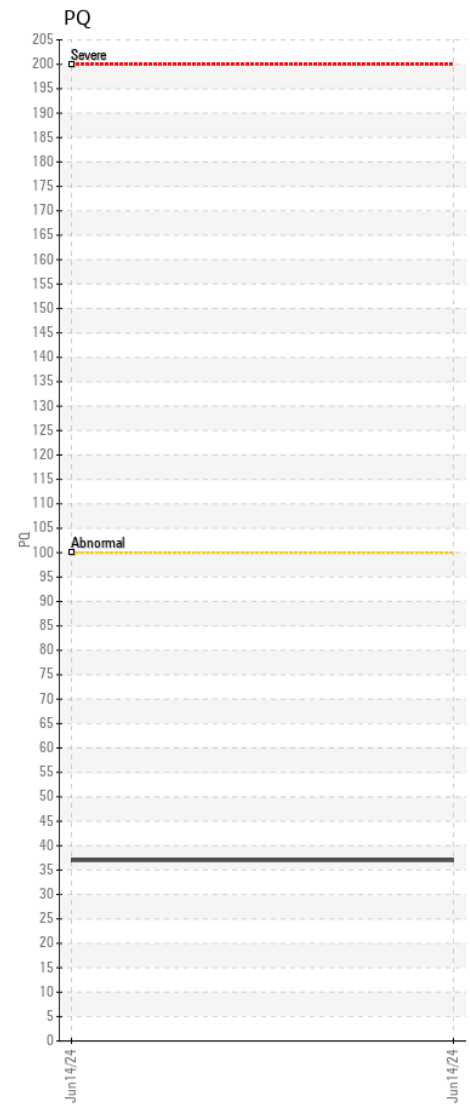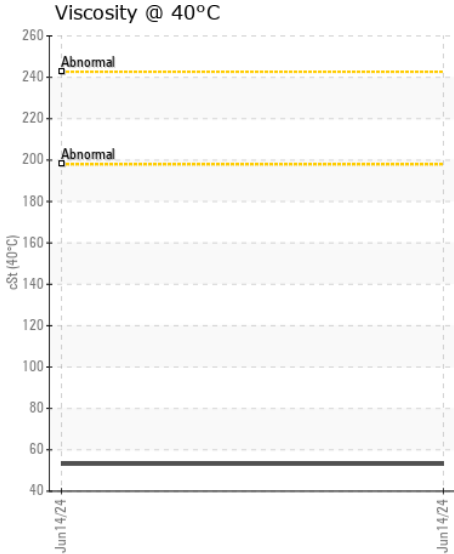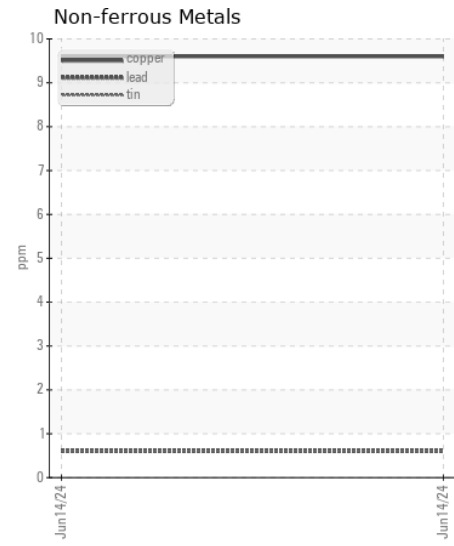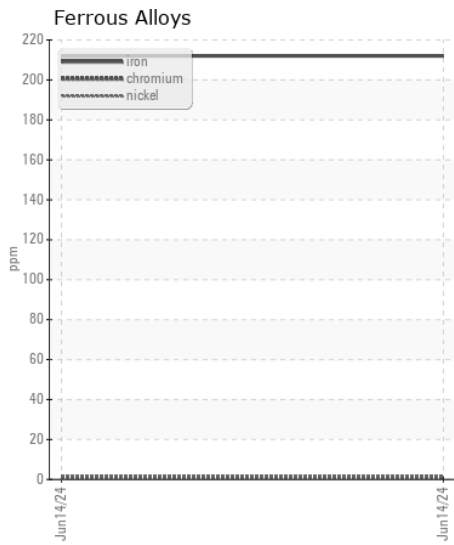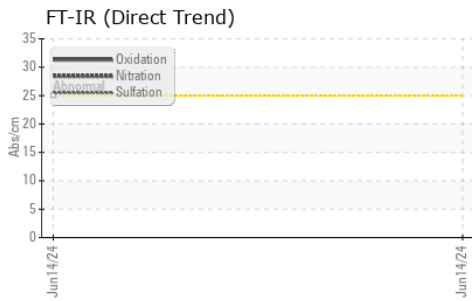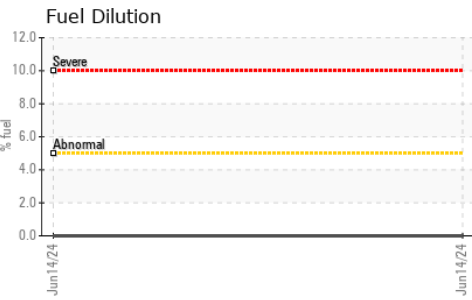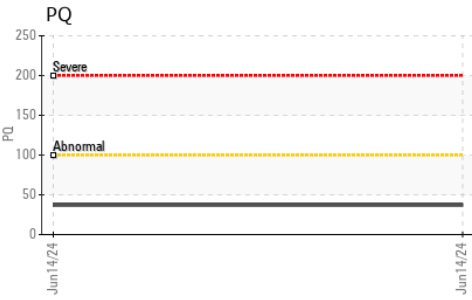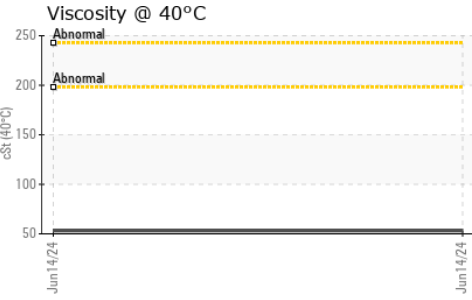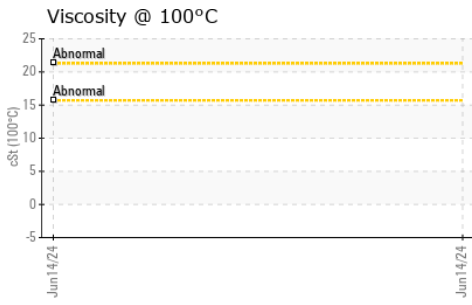

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0222513

Lab Number : 06211451

Unique Number : 11084315

Test Package : CONST (Additional Tests: FT-IR, FuelDilution, KV100, PercentFuel, PQ, TBQ

Received : 17 Jun 2024

Tested : 21 Jun 2024

Diagnosed : 21 Jun 2024 - Jonathan Hester

JRE - GARNER

4161 AUBURN CHURCH RD

GARNER, NC

US 27529

Contact: RALEIGH SHOP

sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

T: (919)614-2260

F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)