



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**SUSAN JOHNSON**  
Machine Id  
[**SUSAN JOHNSON**] 006 569359-6  
Component  
Starboard Reduction Gear  
Fluid  
CHEVRON MEROPA 320 (215 GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor.

**WEAR**

All component wear rates are normal.

**CONTAMINATION**

There is no indication of any contamination in the oil.

**FLUID CONDITION**







The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0064813</b>	MW0064770	MW0058683
Sample Date		Client Info		<b>01 Jun 2024</b>	01 May 2024	01 Dec 2023
Machine Age	hrs	Client Info		<b>45232</b>	44511	43931
Oil Age	hrs	Client Info		<b>45232</b>	44511	43931
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	None	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>150	<b>28</b>	30	26
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>20</b>	21	19
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>50	<b>3</b>	3	2
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

Silicon	ppm	ASTM D5185m	>50	<b>5</b>	5	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185m		<b>6</b>	2	4
Boron	ppm	ASTM D5185m	20	<b>5</b>	3	5
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>25</b>	25	22
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>2</b>	2	2
Calcium	ppm	ASTM D5185m	25	<b>40</b>	48	41
Phosphorus	ppm	ASTM D5185m	235	<b>243</b>	236	223
Zinc	ppm	ASTM D5185m		<b>7</b>	11	0
Sulfur	ppm	ASTM D5185m		<b>8499</b>	8019	6553
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.94</b>	0.93	0.89
Visc @ 40°C	cSt	ASTM D445	304	<b>345</b>	347	345

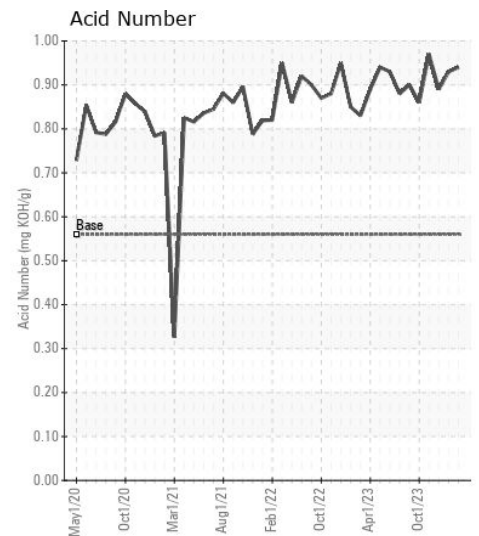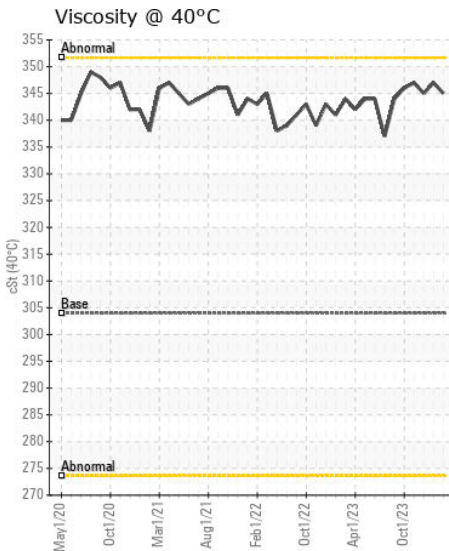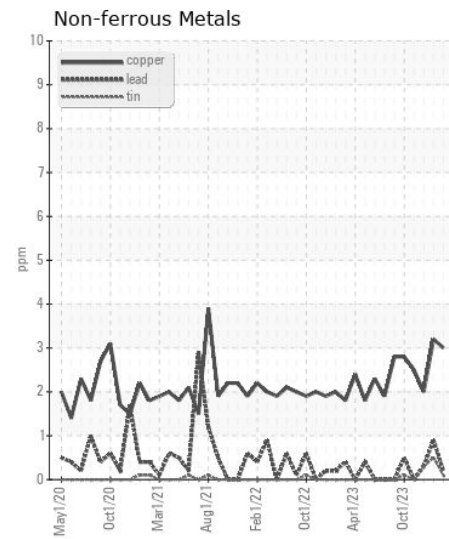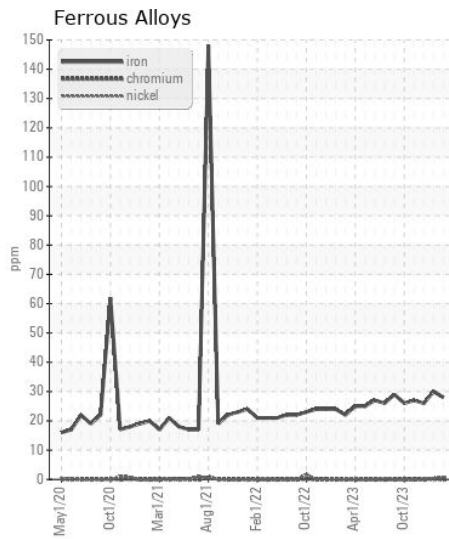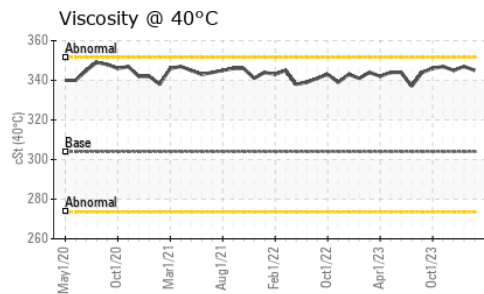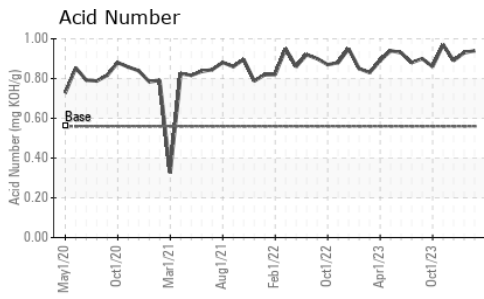

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0064813

**Lab Number** : 06212526

**Unique Number** : 11085390

**Test Package** : MAR 2

**Received** : 17 Jun 2024

**Tested** : 19 Jun 2024

**Diagnosed** : 19 Jun 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)