



LIEBHERR

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH40M 1215-149851
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 5W30 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0273628	---	---
Sample Date		Client Info		14 May 2024	---	---
Machine Age	hrs	Client Info		549	---	---
Oil Age	hrs	Client Info		549	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>15	3	---	---
Lead	ppm	ASTM D5185m	>30	<1	---	---
Copper	ppm	ASTM D5185m	>125	▲ 216	---	---
Tin	ppm	ASTM D5185m	>5	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	9	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	39.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m	250	103	---	---
Barium	ppm	ASTM D5185m	10	26	---	---
Molybdenum	ppm	ASTM D5185m	100	43	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	450	912	---	---
Calcium	ppm	ASTM D5185m	3000	1326	---	---
Phosphorus	ppm	ASTM D5185m	1150	708	---	---
Zinc	ppm	ASTM D5185m	1350	854	---	---
Sulfur	ppm	ASTM D5185m	4250	2539	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	50.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.1	---	---
Visc @ 100°C	cSt	ASTM D445	10.9	12.0	---	---

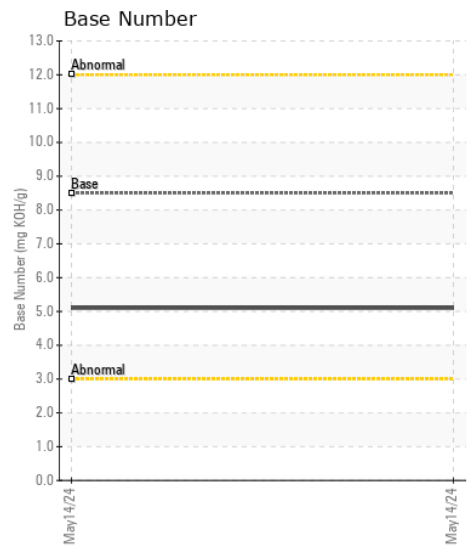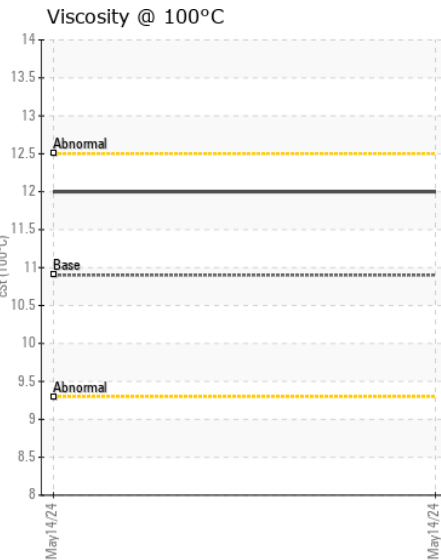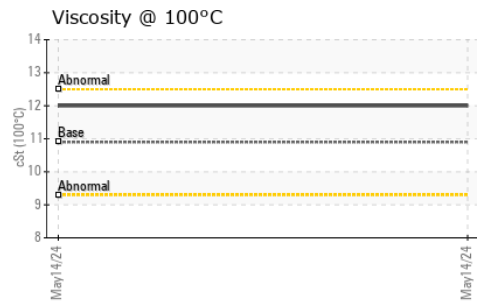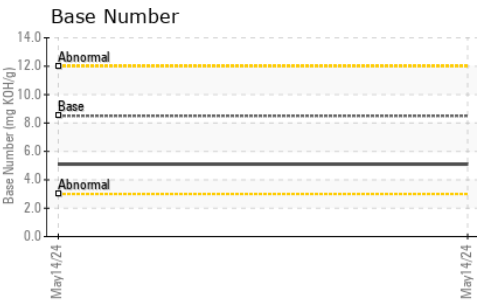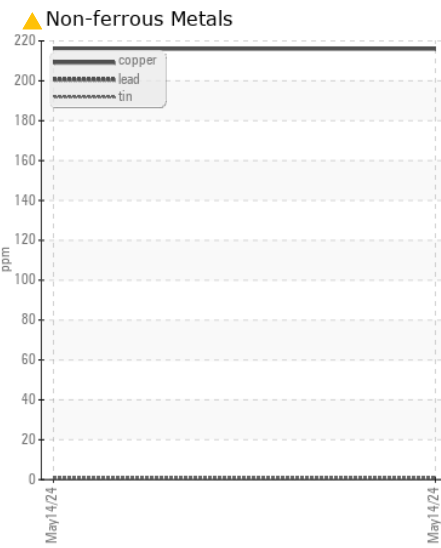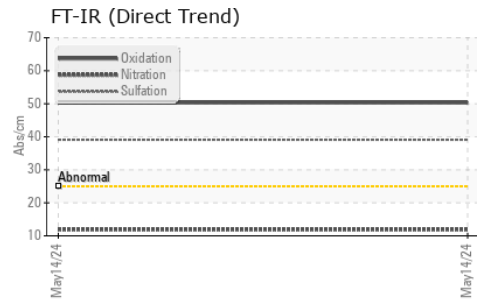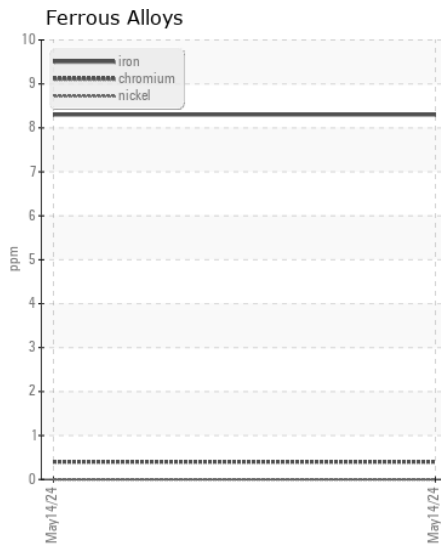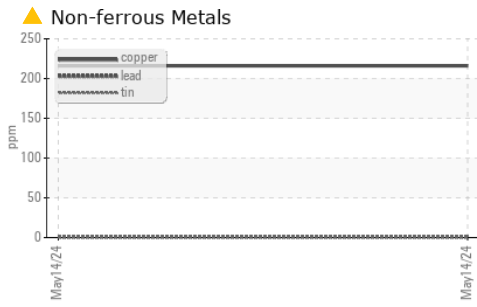

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0273628 **Received** : 19 Jun 2024
Lab Number : 06214447 **Tested** : 20 Jun 2024
Unique Number : 11087311 **Diagnosed** : 21 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

STAINLESS STEEL MIDWEST
 2615 KY-146
 LAGRANGE, KY
 US 40031
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: