



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L120H 632787

Component
Transmission (Auto)

Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP451241	VCP449882	VCP436032
Sample Date		Client Info		07 Jun 2024	30 May 2024	10 Oct 2023
Machine Age	hrs	Client Info		0	7831	6663
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	16	15	60
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	3	4	10
Lead	ppm	ASTM D5185m	>50	<1	<1	0
Copper	ppm	ASTM D5185m	>225	2	1	5
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	4	4	8
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	<1	2
Boron	ppm	ASTM D5185m	187	97	91	67
Barium	ppm	ASTM D5185m	0.0	1	<1	0
Molybdenum	ppm	ASTM D5185m	0.0	<1	0	<1
Manganese	ppm	ASTM D5185m	0.0	<1	<1	2
Magnesium	ppm	ASTM D5185m	6.8	2	1	2
Calcium	ppm	ASTM D5185m	215	69	78	76
Phosphorus	ppm	ASTM D5185m	445	191	210	176
Zinc	ppm	ASTM D5185m	56	28	28	17
Sulfur	ppm	ASTM D5185m	1336	1790	2274	1761
Visc @ 40°C	cSt	ASTM D445	35.3	29.8	29.0	27.9

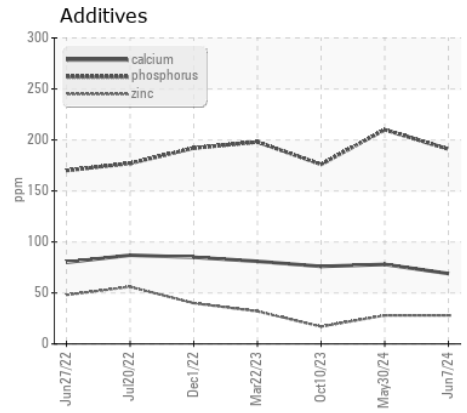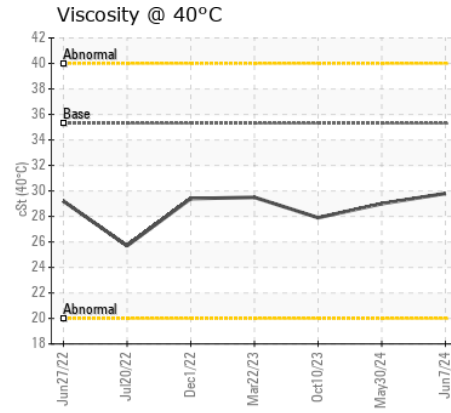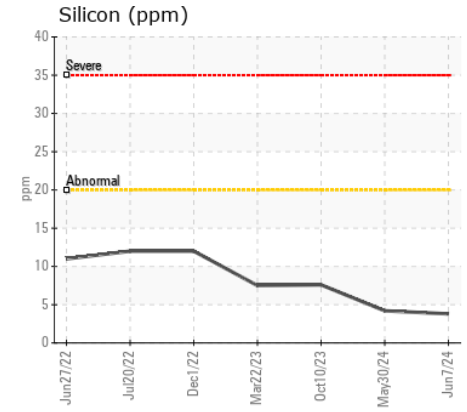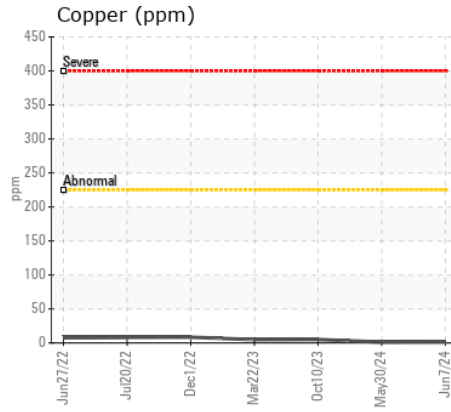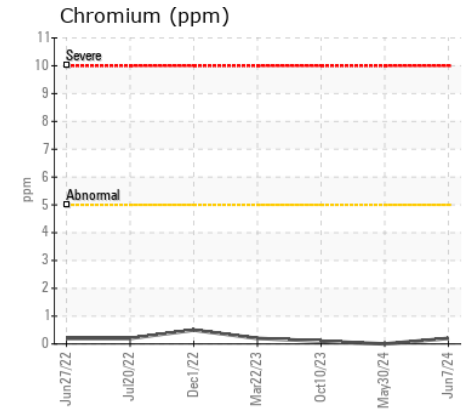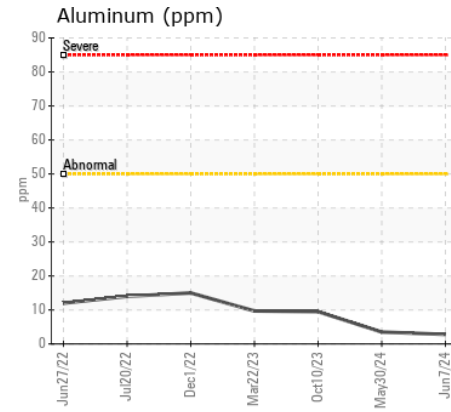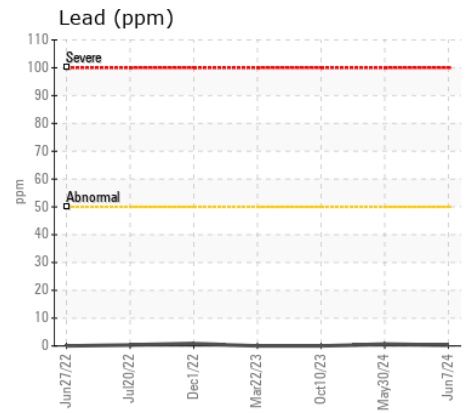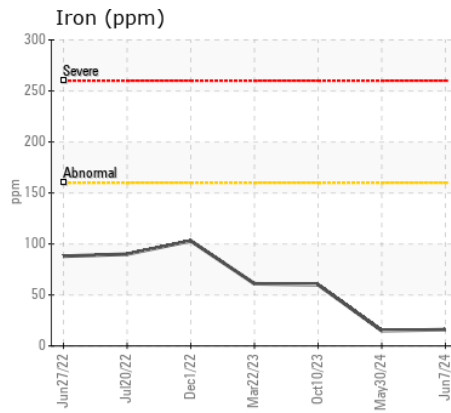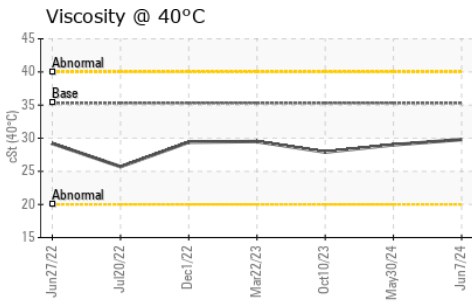

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP451241
Lab Number : 06215189
Unique Number : 11088053
Test Package : MOB 1

Received : 19 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)