



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**(L70H 62404)**  
Machine Id  
**VOLVO L70H 624045**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP0008458	---	---
Sample Date		Client Info		17 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	5	---	---
Lead	ppm	ASTM D5185m	>20	<1	---	---
Copper	ppm	ASTM D5185m	>15	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	8	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<1	---	---
Boron	ppm	ASTM D5185m	250	462	---	---
Barium	ppm	ASTM D5185m	10	<1	---	---
Molybdenum	ppm	ASTM D5185m	100	84	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	435	---	---
Calcium	ppm	ASTM D5185m	3000	1613	---	---
Phosphorus	ppm	ASTM D5185m	1150	1009	---	---
Zinc	ppm	ASTM D5185m	1350	1135	---	---
Sulfur	ppm	ASTM D5185m	4250	3234	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.9	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	---	---

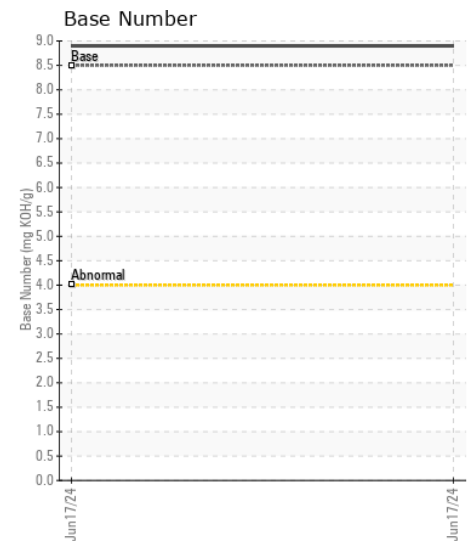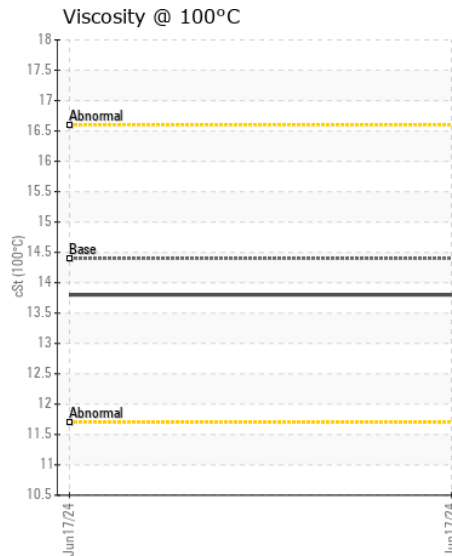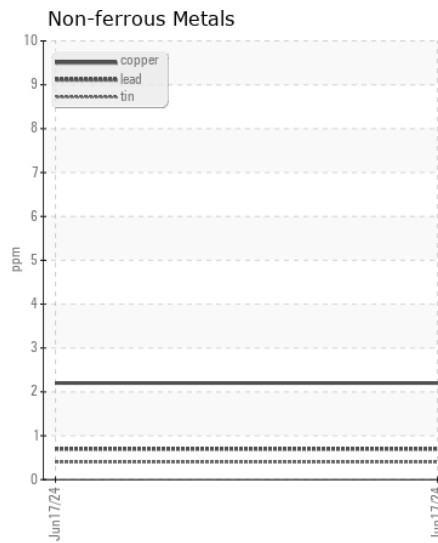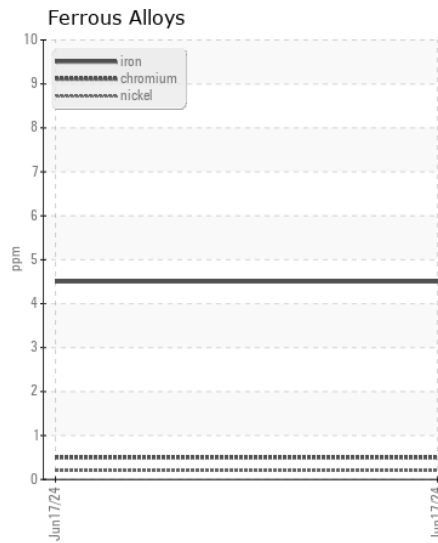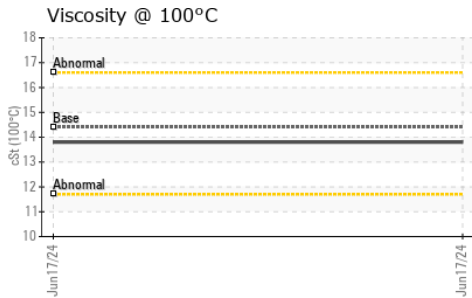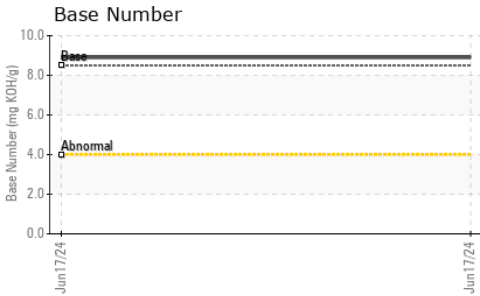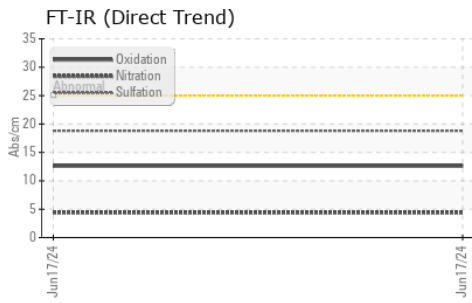

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP0008458 **Received** : 20 Jun 2024  
**Lab Number** : 06215448 **Tested** : 21 Jun 2024  
**Unique Number** : 11088312 **Diagnosed** : 21 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**ALTA EQUIPMENT COMPANY**  
 8750 PHILIPS HWY  
 JACKSONVILLE, FL  
 US 32256  
 Contact: SHAWN NORTHCRAFT  
 shawn.northcraft@altg.com  
 T: (904)737-6000  
 F: (904)737-1260

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)