



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[16W16473]

Machine Id

JOHN DEERE 350P 1FF350PAHPF000476

Component

Hydraulic System

Fluid

JOHN DEERE ZINC-FREE HYDRAULIC OIL 46 (51 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W16473)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217209	JR0206834	JR0185418
Sample Date		Client Info		18 Jun 2024	28 Mar 2024	23 Oct 2023
Machine Age	hrs	Client Info		1986	1492	959
Oil Age	hrs	Client Info		1986	1492	959
Filter Age	hrs	Client Info		1027	533	959
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	19	4	9
Iron	ppm	ASTM D5185m	>32	<1	3	0
Chromium	ppm	ASTM D5185m	>9	0	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	<1	2	<1
Lead	ppm	ASTM D5185m	>28	0	1	0
Copper	ppm	ASTM D5185m	>50	2	6	4
Tin	ppm	ASTM D5185m	>5	0	1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	1	2	<1
Potassium	ppm	ASTM D5185m	>20	3	2	0
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	3935	1805	1675
Particles >6µm		ASTM D7647	>20000	279	140	281
Particles >14µm		ASTM D7647	>640	12	12	18
Particles >21µm		ASTM D7647	>160	2	3	5
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	19/15/11	18/14/11	18/15/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	3	0	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	1	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	1	5
Calcium	ppm	ASTM D5185m		5	6	6
Phosphorus	ppm	ASTM D5185m		537	560	547
Zinc	ppm	ASTM D5185m		50	45	57
Sulfur	ppm	ASTM D5185m		180	115	202
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.18	0.20	0.15
Visc @ 40°C	cSt	ASTM D445	47	46.7	46.7	46.6

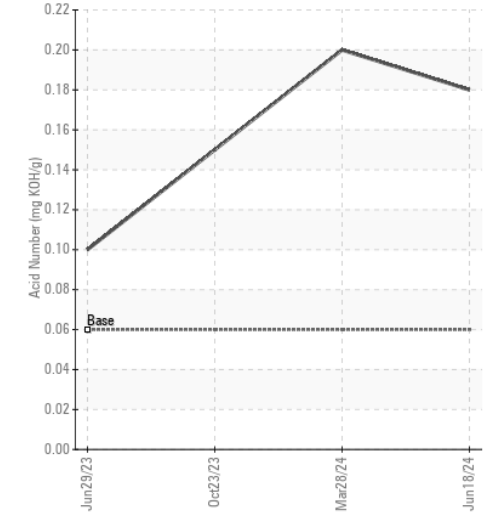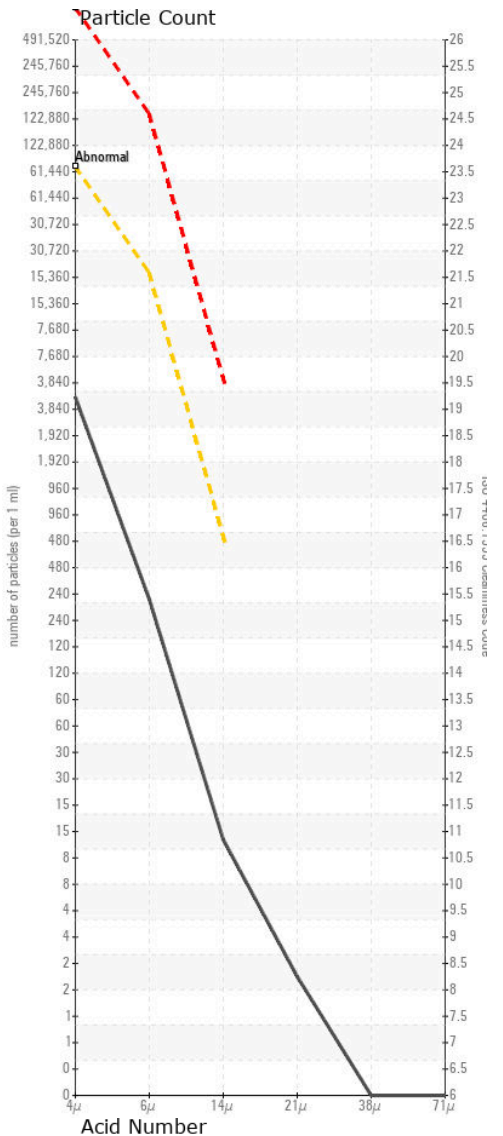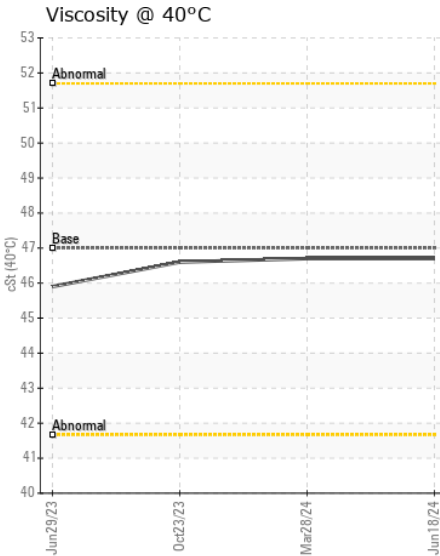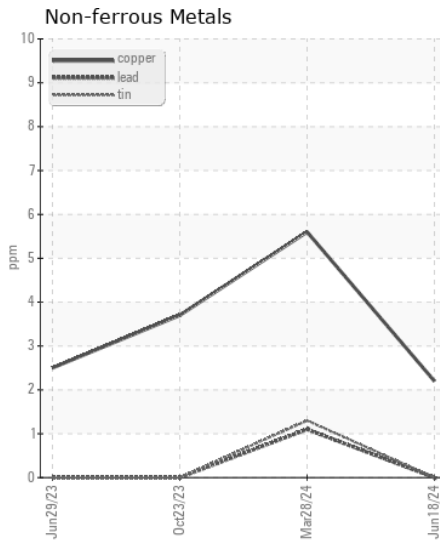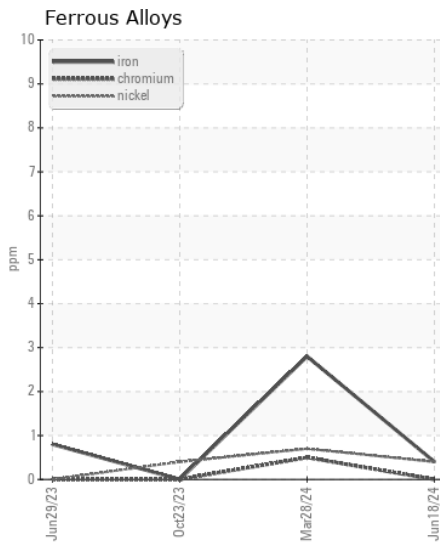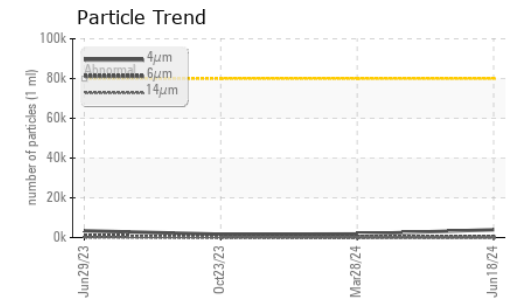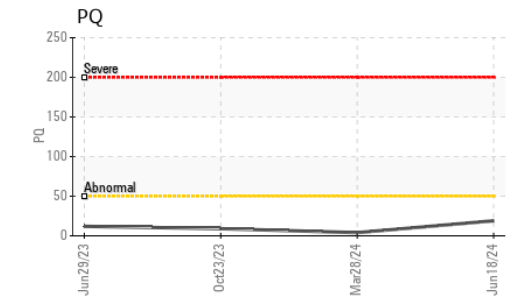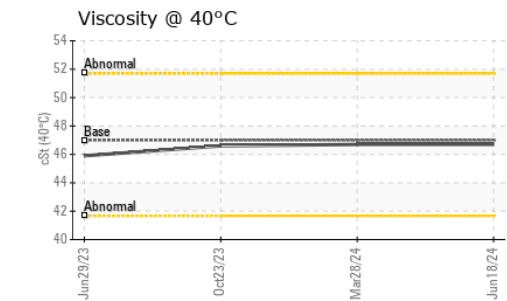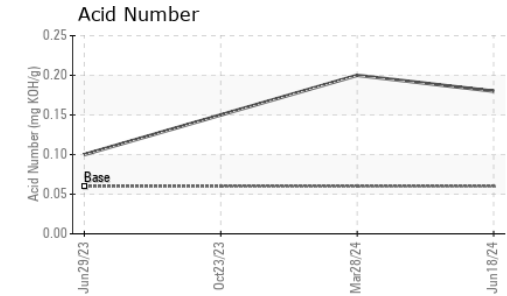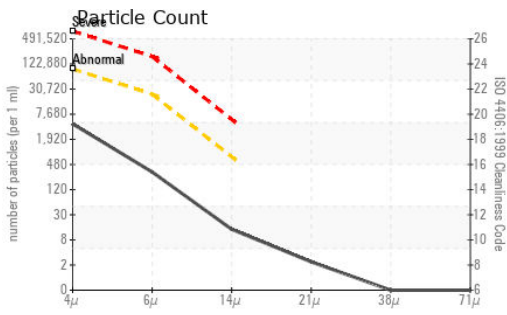

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217209 **Received** : 20 Jun 2024
Lab Number : 06215707 **Tested** : 21 Jun 2024
Unique Number : 11088571 **Diagnosed** : 22 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

F: