



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / RIVER VALLEY OZARK
Machine Id
WL033
Component
Rear Left Final Drive
Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0109134	PCA0069708	PCA0069757
Sample Date		Client Info		13 Jun 2024	15 Mar 2024	10 Oct 2023
Machine Age	hrs	Client Info		43181	42691	42265
Oil Age	hrs	Client Info		323556	323556	323556
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	195	219	65
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m	>15	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	3	3	2
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>75	5	6	2
Tin	ppm	ASTM D5185m	>8	2	2	1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	19	21	20
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m		2	0	0
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		0	2	0
Manganese	ppm	ASTM D5185m		2	2	1
Magnesium	ppm	ASTM D5185m		16	14	16
Calcium	ppm	ASTM D5185m		2956	3439	3213
Phosphorus	ppm	ASTM D5185m		926	894	813
Zinc	ppm	ASTM D5185m		1101	1121	1138
Sulfur	ppm	ASTM D5185m		4607	4352	4034
Visc @ 40°C	cSt	ASTM D445	195	151	159	176

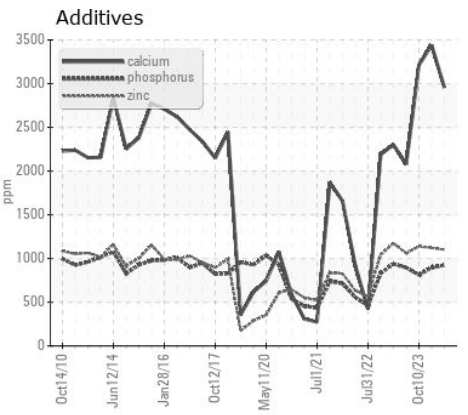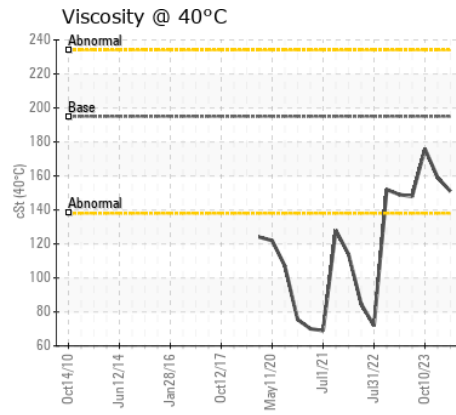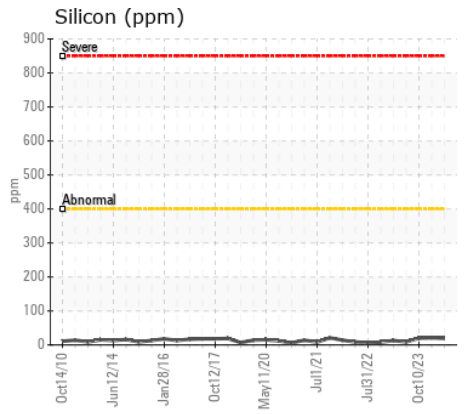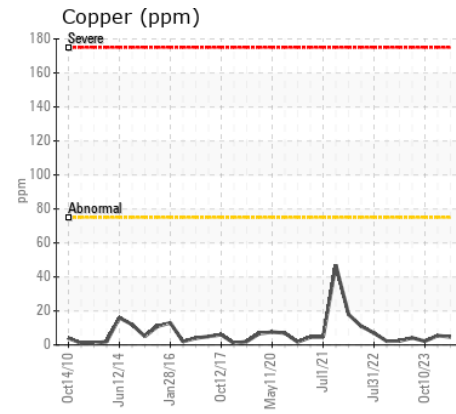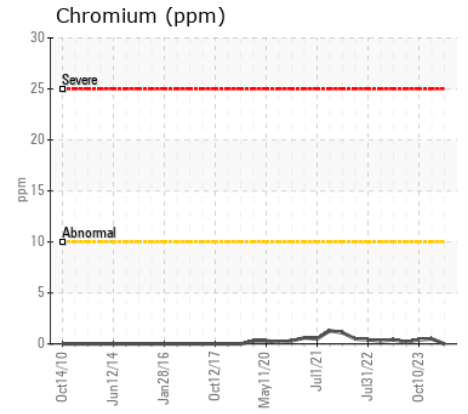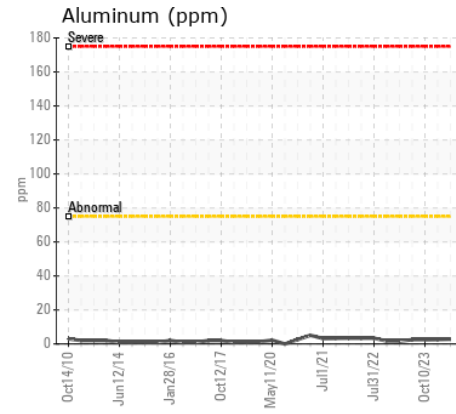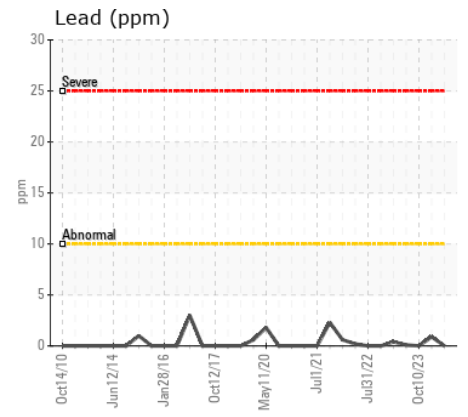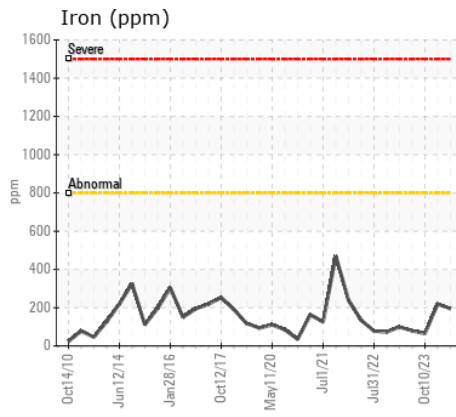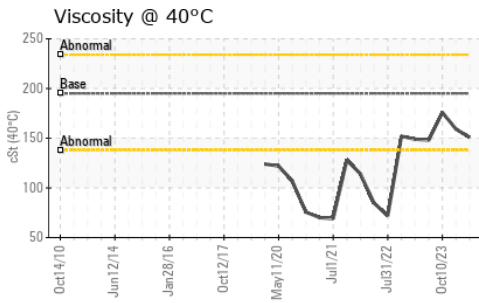

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0109134
 Lab Number : 06216388
 Unique Number : 11089252
 Test Package : MOB 1

Received : 20 Jun 2024
 Tested : 21 Jun 2024
 Diagnosed : 21 Jun 2024 - Wes Davis

Kemp Quarries - River Valley - Ozark
 9446 N Hwy 309
 Ozark, AR
 US 72949
 Contact: OZARK NOTIFICATIONS
 ozark@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: