



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
JOHN DEERE 3032E 1LV3032ELLL134422
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0215961	---	---
Sample Date		Client Info		17 Jun 2024	---	---
Machine Age	hrs	Client Info		142	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	27	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	6	---	---
Lead	ppm	ASTM D5185m	>26	1	---	---
Copper	ppm	ASTM D5185m	>26	22	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Fuel content negligible. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>22	63	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>2.1	1.2	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	10	---	---
Boron	ppm	ASTM D5185m		201	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		221	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		641	---	---
Calcium	ppm	ASTM D5185m		1877	---	---
Phosphorus	ppm	ASTM D5185m		909	---	---
Zinc	ppm	ASTM D5185m		1118	---	---
Sulfur	ppm	ASTM D5185m		3553	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	10.4	---	---

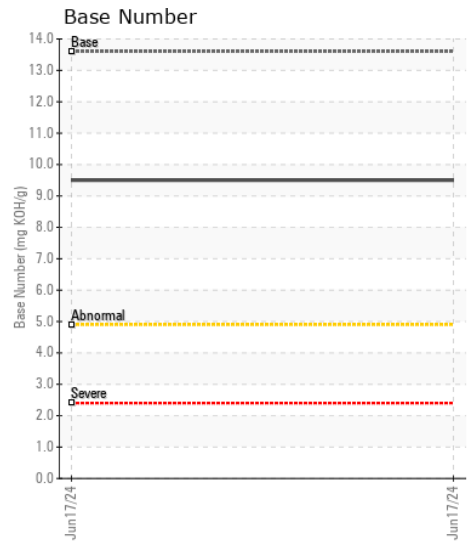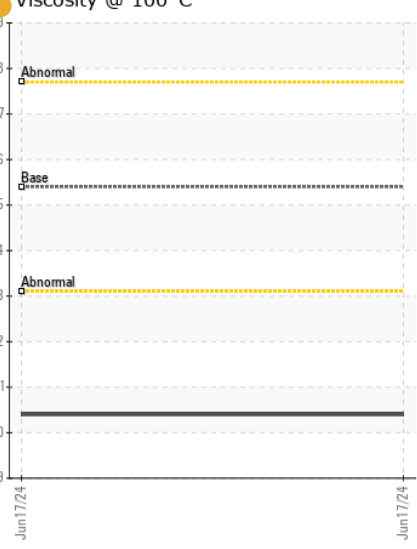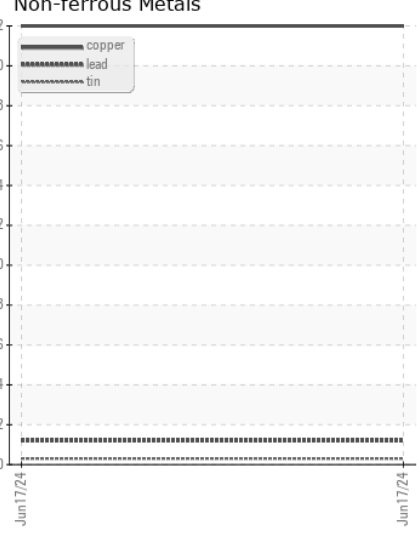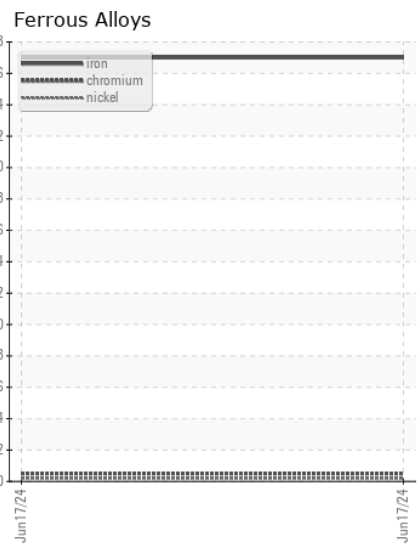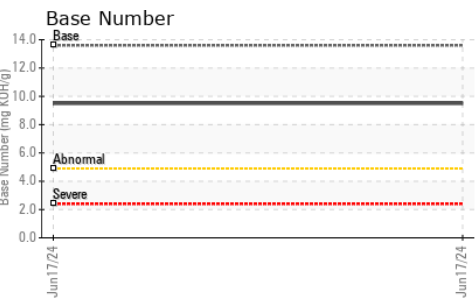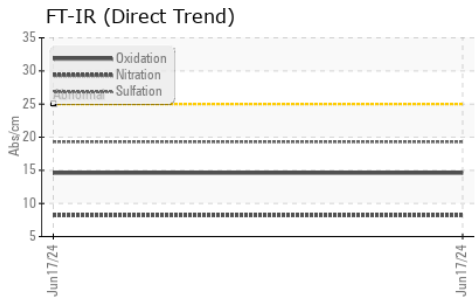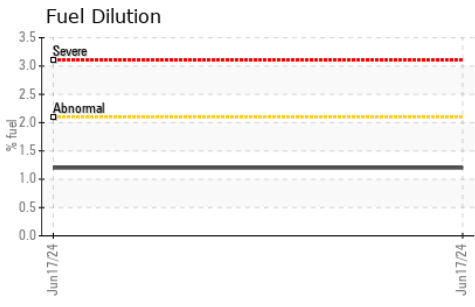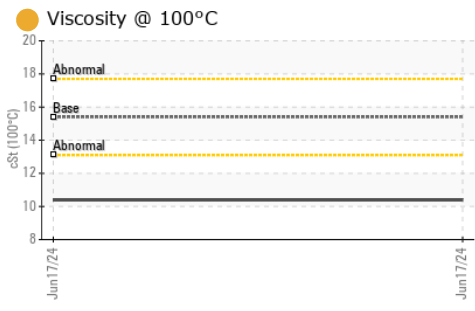

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0215961 **Received** : 21 Jun 2024
Lab Number : 06216571 **Tested** : 25 Jun 2024
Unique Number : 11089435 **Diagnosed** : 25 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

JRE - STATESVILLE
 635 MOCKSVILLE HWY
 STATESVILLE, NC
 US 28625

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: MIKE CRANFILL
 MCRANFILL@JAMESRIVEREQUIPMENT.COM

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (704)872-6411

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: