



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[A35637]

Machine Id

JOHN DEERE 744L 1DW744LXHNL715286

Component

Hydraulic System

Fluid

JOHN DEERE HYDRAU (40 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A35637)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007659	WE0006589	WE0004875
Sample Date		Client Info		18 Jun 2024	24 Jan 2024	28 Aug 2023
Machine Age	hrs	Client Info		2372	1571	1041
Oil Age	hrs	Client Info		2372	1571	1041
Filter Age	hrs	Client Info		2372	1571	1041
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		None	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	11	3	2
Chromium	ppm	ASTM D5185m	>10	3	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	3	3	<1
Lead	ppm	ASTM D5185m	>10	1	0	0
Copper	ppm	ASTM D5185m	>75	6	1	3
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	9	▲ 36	3
Potassium	ppm	ASTM D5185m	>20	3	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	4196	▲ 131820	1724
Particles >6µm		ASTM D7647	>1300	303	▲ 39642	610
Particles >14µm		ASTM D7647	>160	10	▲ 378	49
Particles >21µm		ASTM D7647	>40	1	▲ 72	8
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/15/10	▲ 24/22/16	18/16/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	0	2
Boron	ppm	ASTM D5185m		<1	0	0
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		42	<1	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		10	24	2
Calcium	ppm	ASTM D5185m	87	721	386	111
Phosphorus	ppm	ASTM D5185m	727	860	609	615
Zinc	ppm	ASTM D5185m	900	1069	693	831
Sulfur	ppm	ASTM D5185m	1500	2414	2294	1903
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.64	0.50	0.66
Visc @ 40°C	cSt	ASTM D445	65	53.7	59.1	58.3

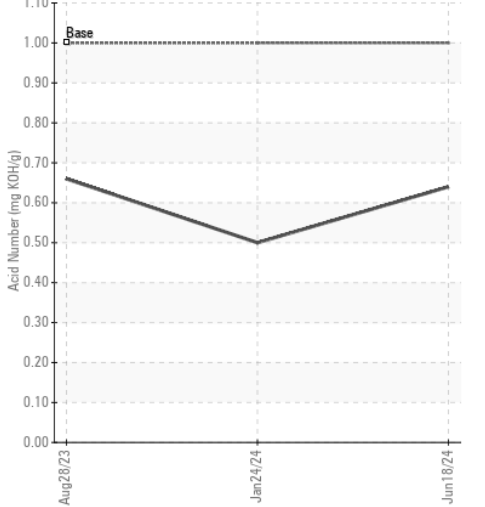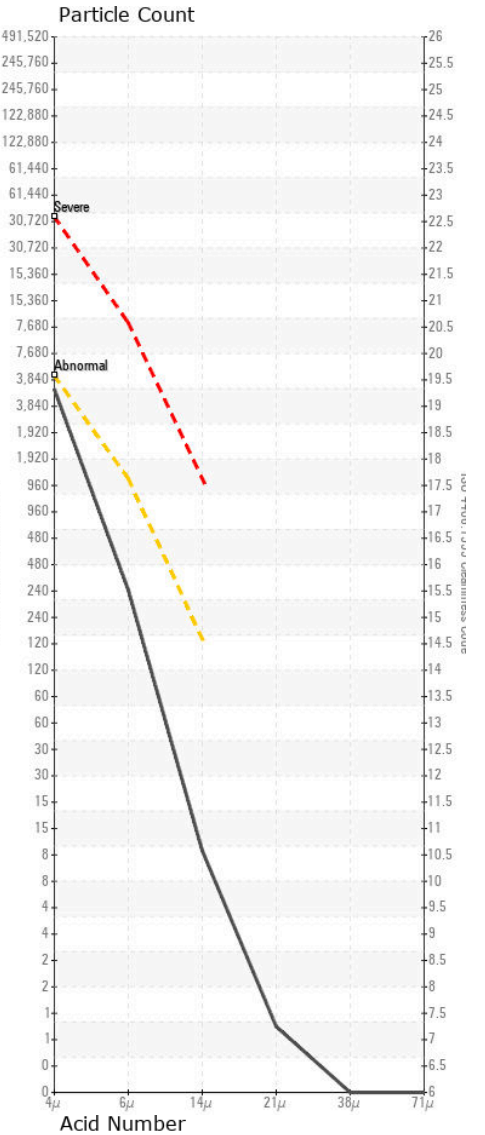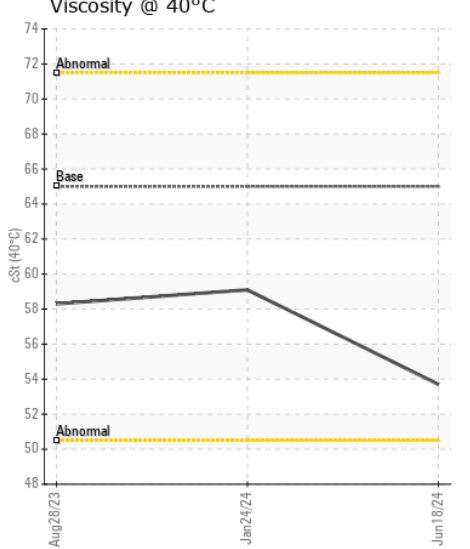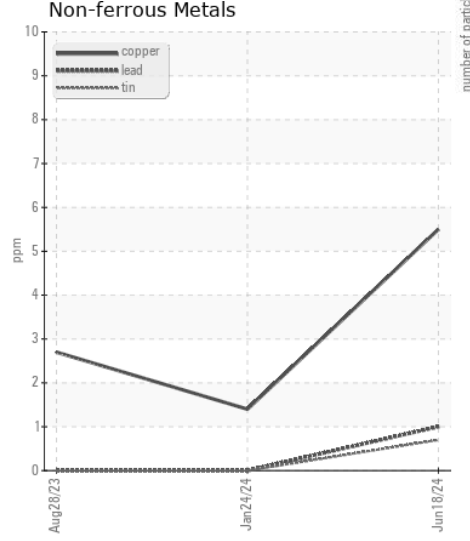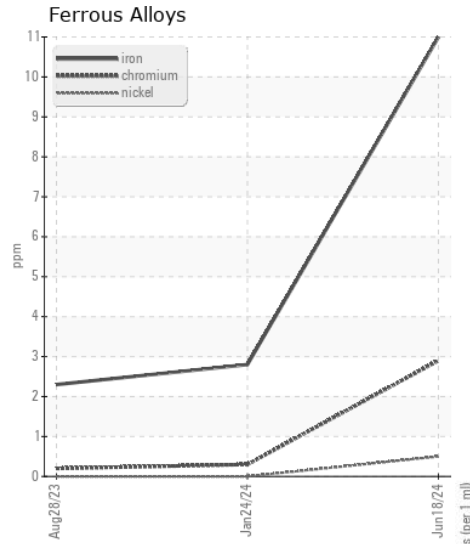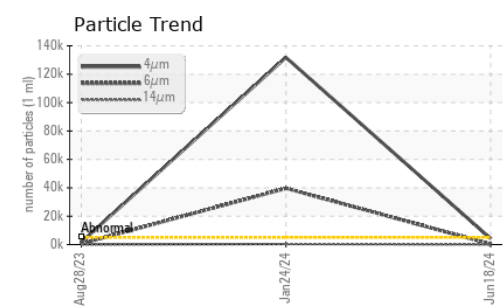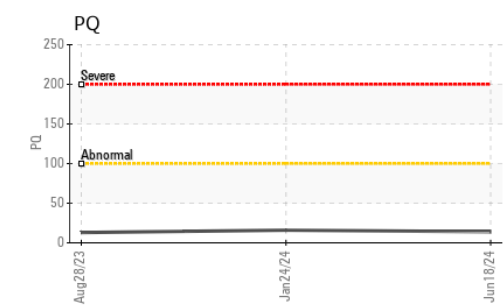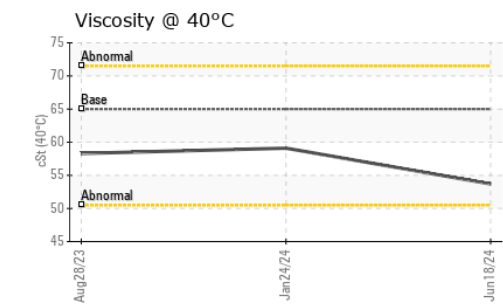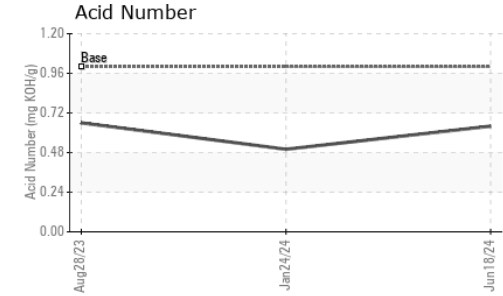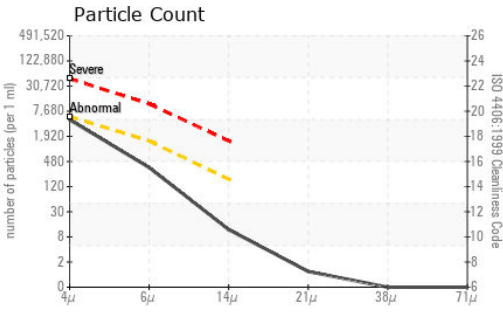

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007659 **Received** : 21 Jun 2024
Lab Number : 06216779 **Tested** : 24 Jun 2024
Unique Number : 11089643 **Diagnosed** : 24 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE
 25135 ONE AVIATION WAY SW
 MADISON, AL
 US 35756
 Contact: HERBERT STONE
 WTE013@WARRIORTRACTOR.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)