



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
6215693
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06217769	IL06035566	---
Sample Date		Client Info		23 Jun 2024	14 Dec 2023	---
Machine Age	mls	Client Info		0	0	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	67	94	---
Chromium	ppm	ASTM D5185m	>20	3	4	---
Nickel	ppm	ASTM D5185m	>4	0	1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	▲ 25	32	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	2	3	---
Tin	ppm	ASTM D5185m	>15	0	1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	11	---
Potassium	ppm	ASTM D5185m	>20	17	47	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol	%	*ASTM D2982		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	1.5	1.6	---
Nitration	Abs/cm	*ASTM D7624	>20	14.6	14.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.0	26.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	1	---
Boron	ppm	ASTM D5185m	250	17	17	---
Barium	ppm	ASTM D5185m	10	0	12	---
Molybdenum	ppm	ASTM D5185m	100	80	49	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m	450	85	498	---
Calcium	ppm	ASTM D5185m	3000	2237	1604	---
Phosphorus	ppm	ASTM D5185m	1150	896	705	---
Zinc	ppm	ASTM D5185m	1350	1071	898	---
Sulfur	ppm	ASTM D5185m	4250	3735	2383	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.0	27.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	4.6	5.9	---
Visc @ 100°C	cSt	ASTM D445	10.9	10.4	11.1	---

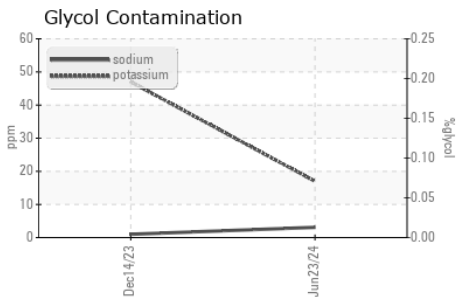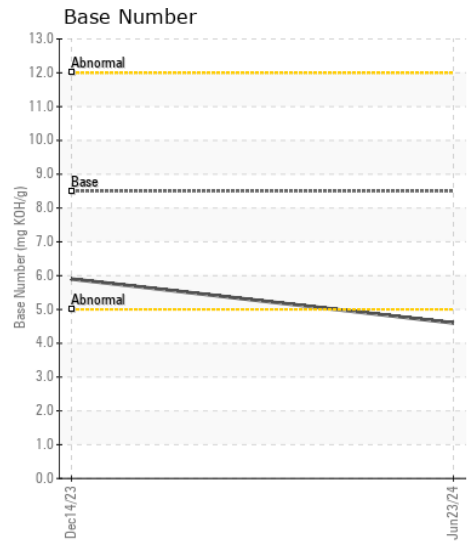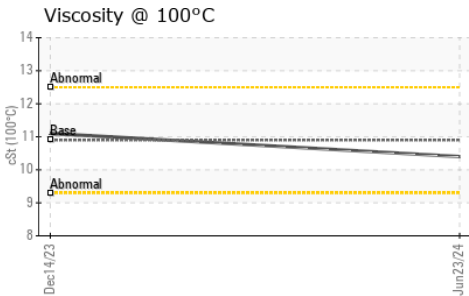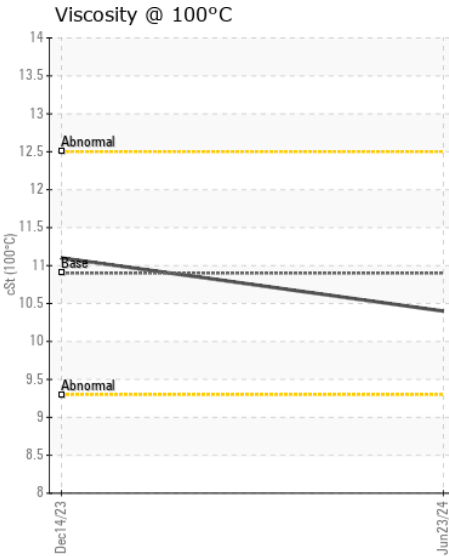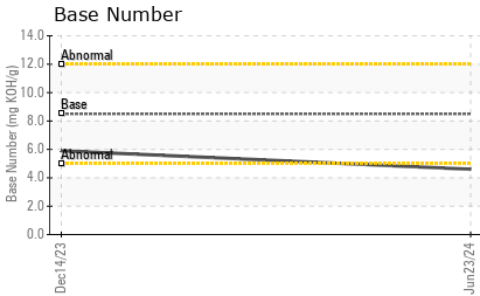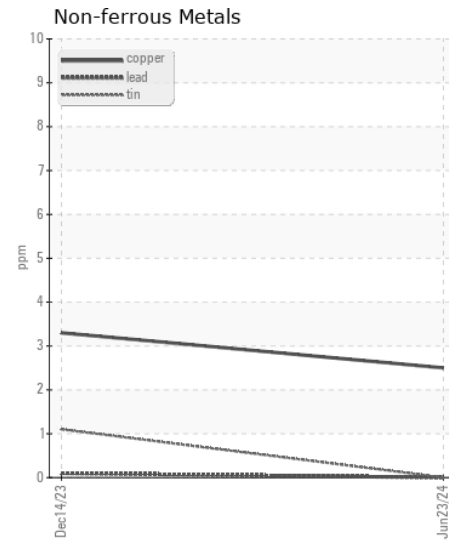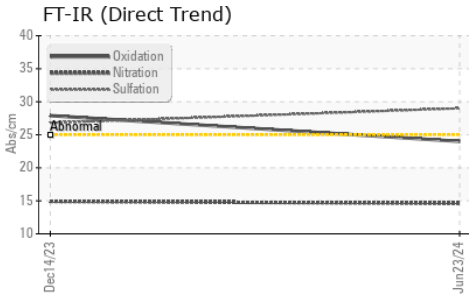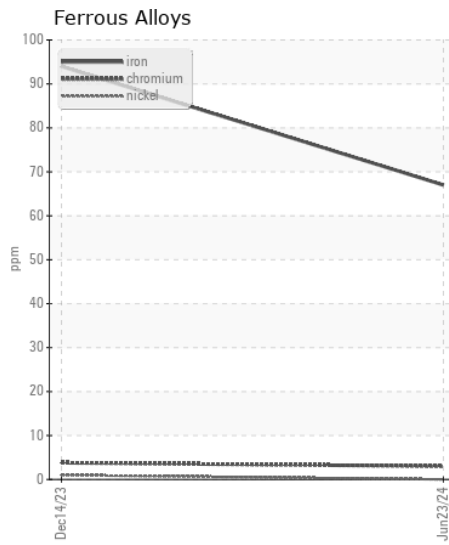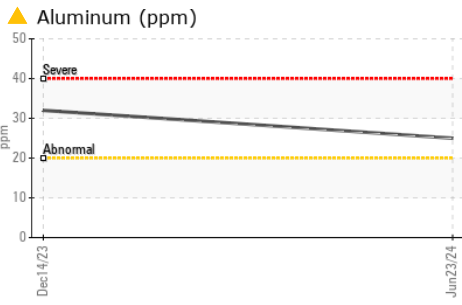

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06217769 **Received** : 24 Jun 2024
Lab Number : 06217769 **Tested** : 25 Jun 2024
Unique Number : 11090633 **Diagnosed** : 25 Jun 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: Glycol)

IDEALASE-NORCROSS
 4571 NORTH BUFORD HWY
 NORCROSS, GA
 US 30071-2808
 Contact: RICK MARKS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (770)300-0614
 F: (770)300-0614