



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**NOT GIVNE RPL0012510**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0012510	---	---
Sample Date		Client Info		23 Jun 2024	---	---
Machine Age	mls	Client Info		0	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	49	---	---
Chromium	ppm	ASTM D5185m	>20	3	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	12	---	---
Lead	ppm	ASTM D5185m	>40	12	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	10	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.7	---	---
Nitration	Abs/cm	*ASTM D7624	>20	13.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<1	---	---
Boron	ppm	ASTM D5185m	250	9	---	---
Barium	ppm	ASTM D5185m	10	1	---	---
Molybdenum	ppm	ASTM D5185m	100	67	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	450	998	---	---
Calcium	ppm	ASTM D5185m	3000	1256	---	---
Phosphorus	ppm	ASTM D5185m	1150	1065	---	---
Zinc	ppm	ASTM D5185m	1350	1322	---	---
Sulfur	ppm	ASTM D5185m	4250	2786	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.1	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.6	---	---

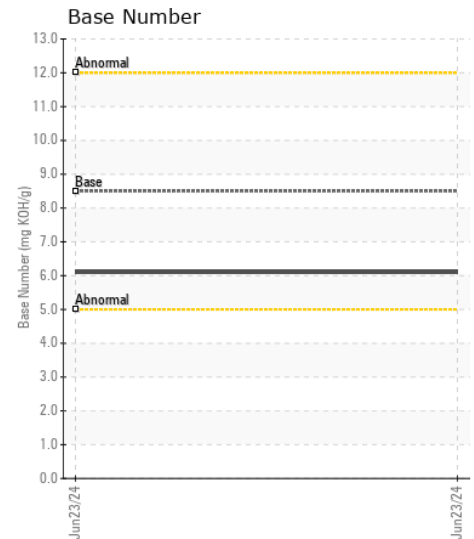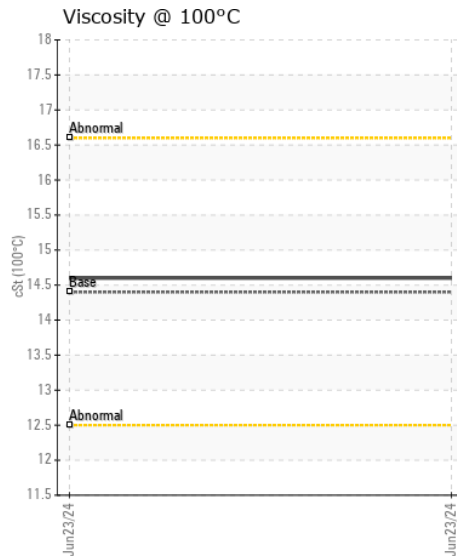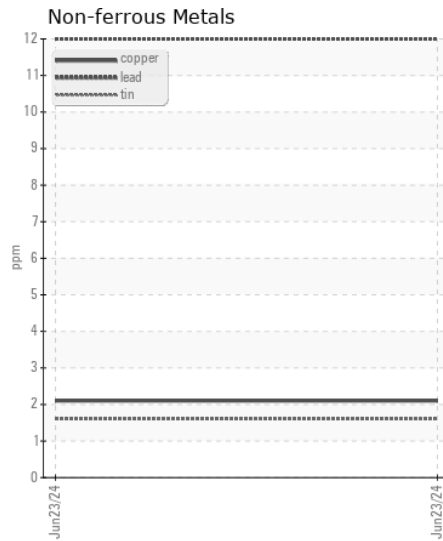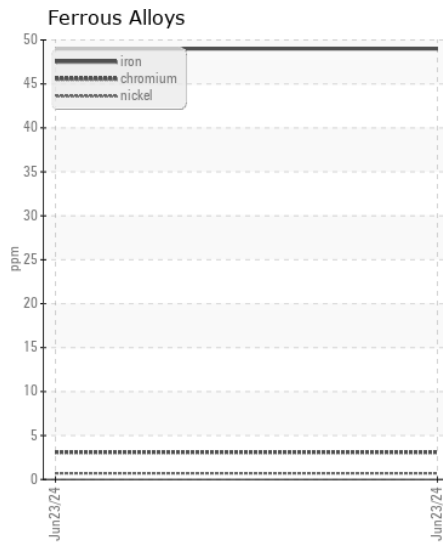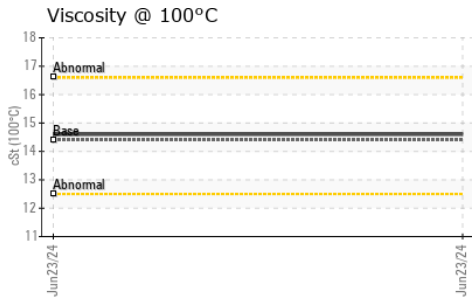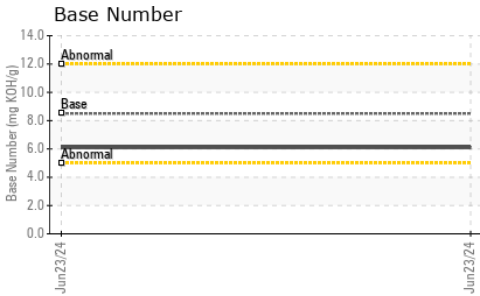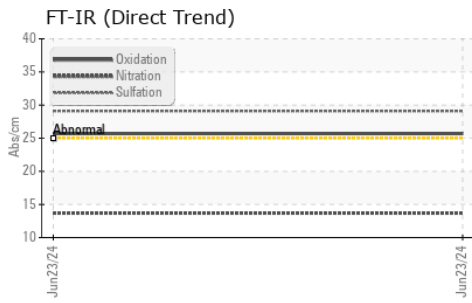

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0012510  
**Lab Number** : 06217882  
**Unique Number** : 11096079  
**Test Package** : FLEET

**Received** : 24 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Don Baldrige

**RTL PACLEASE - 7013 - Albuquerque**  
 901 64th St. N.W.  
 Albuquerque, NM  
 US 87121

Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: