



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CATERPILLAR 552 FELLER 16-04 (S/N CAT00552PFG00199)

Component
Swing Drive

Fluid
CAT TDTO SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06218408	---	---
Sample Date		Client Info		08 May 2024	---	---
Machine Age	hrs	Client Info		6486	---	---
Oil Age	hrs	Client Info		1607	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>400	51	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>50	2	---	---
Copper	ppm	ASTM D5185m	>200	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	9	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		11	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		10	---	---
Calcium	ppm	ASTM D5185m	2980	3010	---	---
Phosphorus	ppm	ASTM D5185m	1100	1091	---	---
Zinc	ppm	ASTM D5185m	1270	1247	---	---
Sulfur	ppm	ASTM D5185m		12123	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.58	---	---
Visc @ 40°C	cSt	ASTM D445	195	196	---	---
Visc @ 100°C	cSt	ASTM D445	18.0	17.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270	96	93	---	---

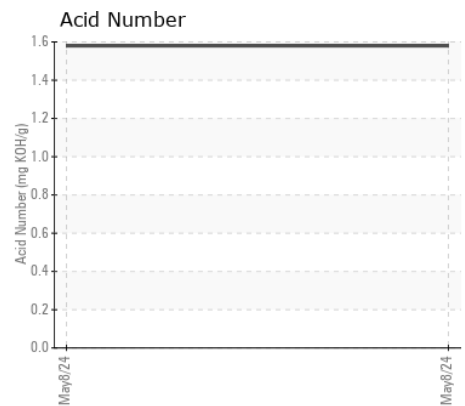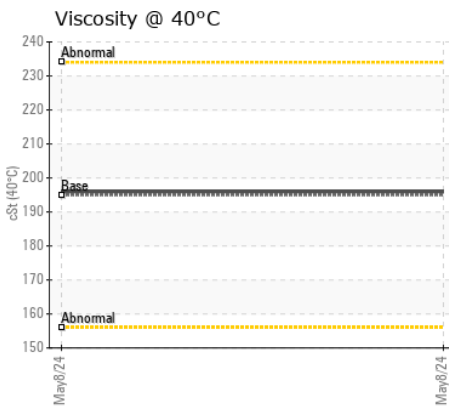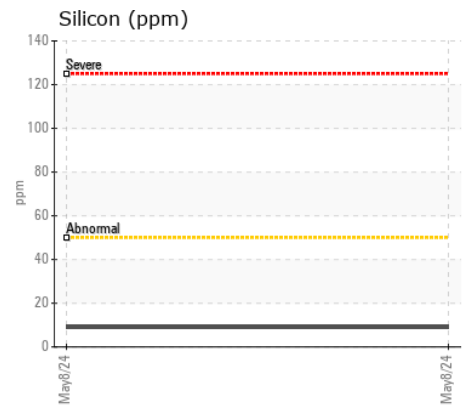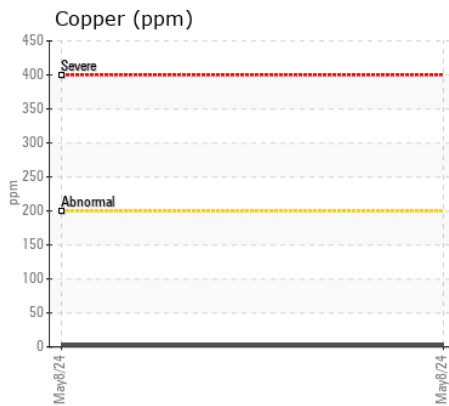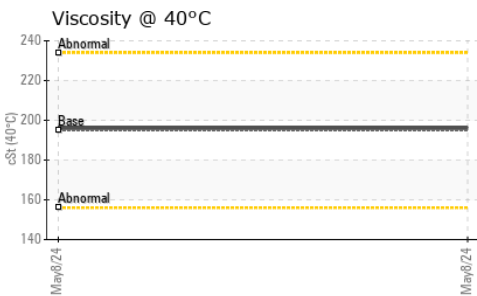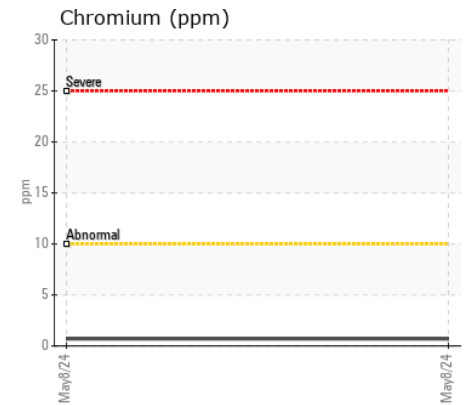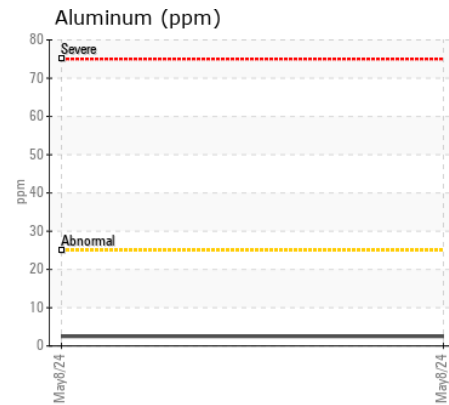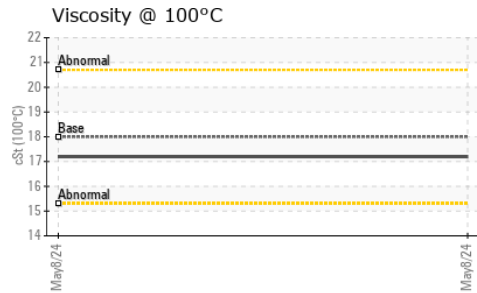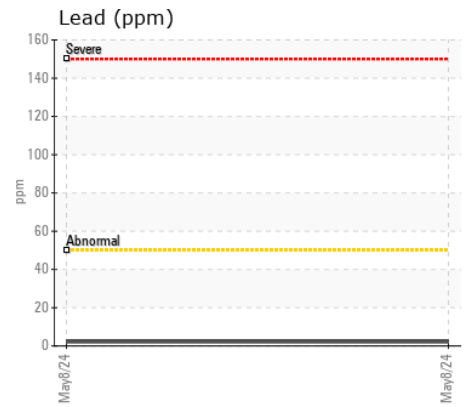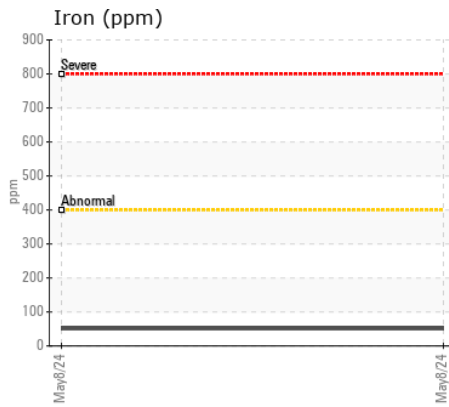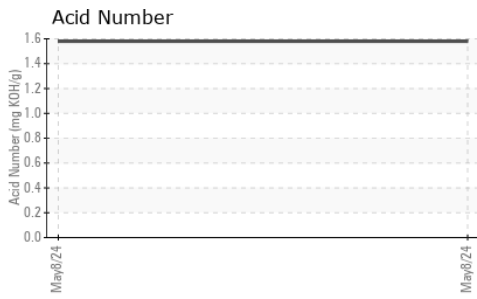

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06218408
Lab Number : 06218408
Unique Number : 11096605
Test Package : MOB 2 (Additional Tests: KV100, VI)

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

KASKI LOGGING
 22411 HE CEDAR CREEK RD
 AMBOY, WA
 US 98601
 Contact: NATHAN BYRD

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: