



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 648LII F711103
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0216555	---	---
Sample Date		Client Info		17 Jun 2024	---	---
Machine Age	hrs	Client Info		2598	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	21	---	---
Iron	ppm	ASTM D5185m	>200	25	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>7	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>45	1	---	---
Copper	ppm	ASTM D5185m	>225	8	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	6	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m	6	1	---	---
Barium	ppm	ASTM D5185m	0	1	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	145	93	---	---
Calcium	ppm	ASTM D5185m	3570	3447	---	---
Phosphorus	ppm	ASTM D5185m	1290	1056	---	---
Zinc	ppm	ASTM D5185m	1640	1263	---	---
Sulfur	ppm	ASTM D5185m		3724	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	47.4	---	---

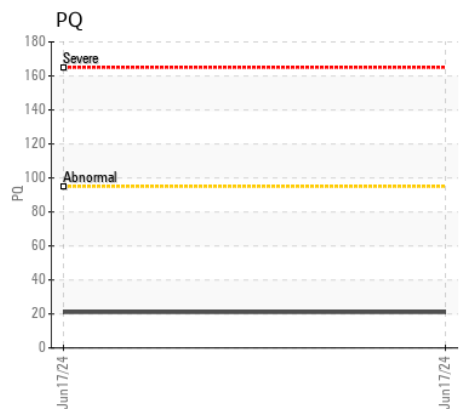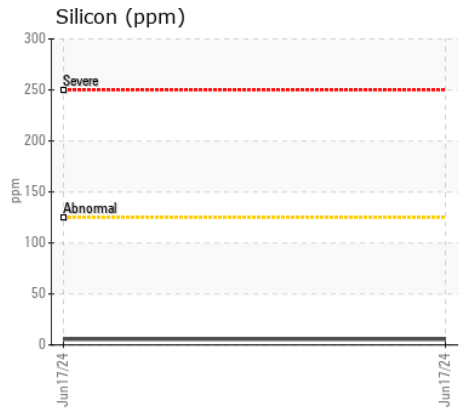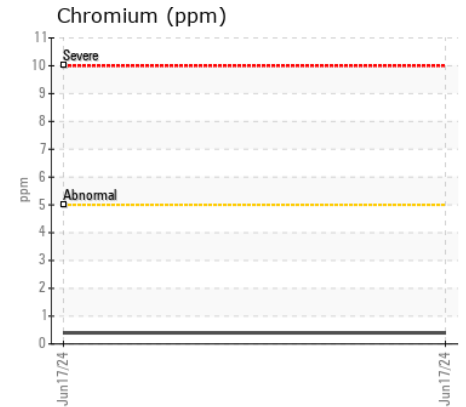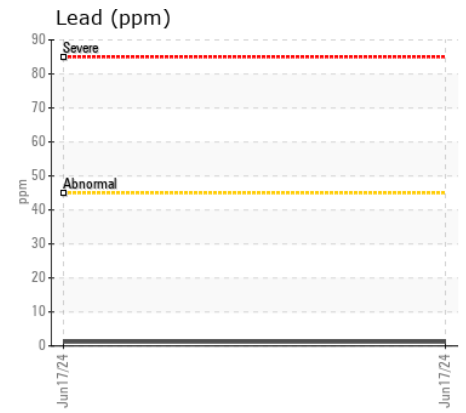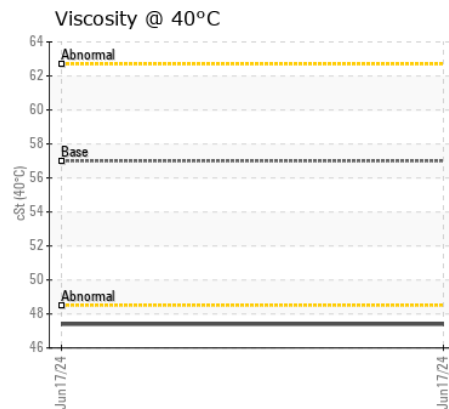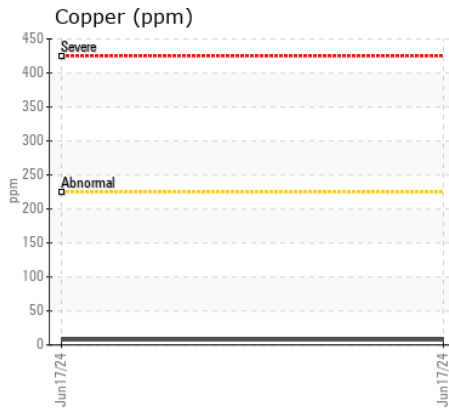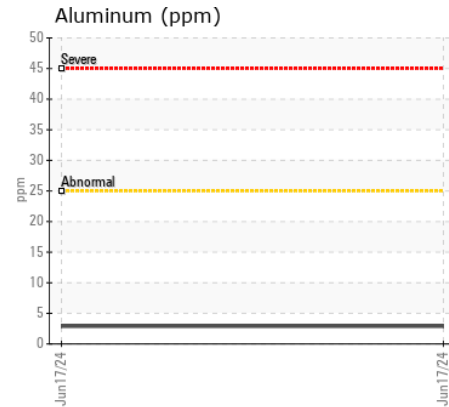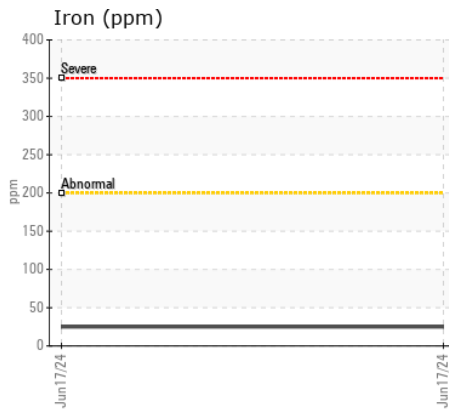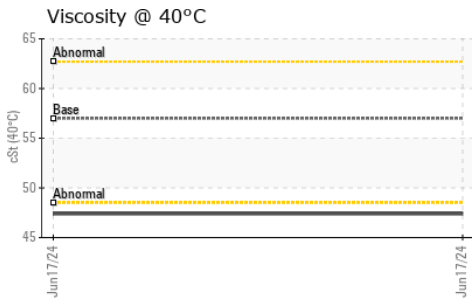

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0216555 **Received** : 24 Jun 2024
Lab Number : 06218443 **Tested** : 25 Jun 2024
Unique Number : 11096640 **Diagnosed** : 25 Jun 2024 - Sean Felton
Test Package : MOBCE (Additional Tests: PQ)

JRE - FISHERSVILLE
 98 EXPO ROAD
 FISHERSVILLE, VA
 US 22939

Contact: MIKE JENKINS
 MIKE.JENKINS@JAMESRIVEREQUIPMENT.COM
 T: (540)292-3494
 F: (540)337-1495

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)