



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 950K C074920 (S/N 1T0950KPKHF317769)

Component
Left Inner Final Drive

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218727	JR0068272	JR0013530
Sample Date		Client Info		18 Jun 2024	19 Nov 2020	08 Nov 2019
Machine Age	hrs	Client Info		6116	3819	2460
Oil Age	hrs	Client Info		0	0	460
Filter Age	hrs	Client Info		0	0	460
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	23	25	26
Iron	ppm	ASTM D5185m	>750	25	40	63
Chromium	ppm	ASTM D5185m	>9	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>40	3	<1	0
Lead	ppm	ASTM D5185m	>15	<1	3	2
Copper	ppm	ASTM D5185m	>40	<1	<1	1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	6	8	3
Potassium	ppm	ASTM D5185m	>20	3	4	5
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	2	4
Boron	ppm	ASTM D5185m	6	4	1	6
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	1	0	0
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	145	105	99	100
Calcium	ppm	ASTM D5185m	3570	3567	3705	3584
Phosphorus	ppm	ASTM D5185m	1290	1019	988	953
Zinc	ppm	ASTM D5185m	1640	1228	1239	1220
Sulfur	ppm	ASTM D5185m		3497	2916	3194
Visc @ 40°C	cSt	ASTM D445	57.0	49.9	44.5	47.4

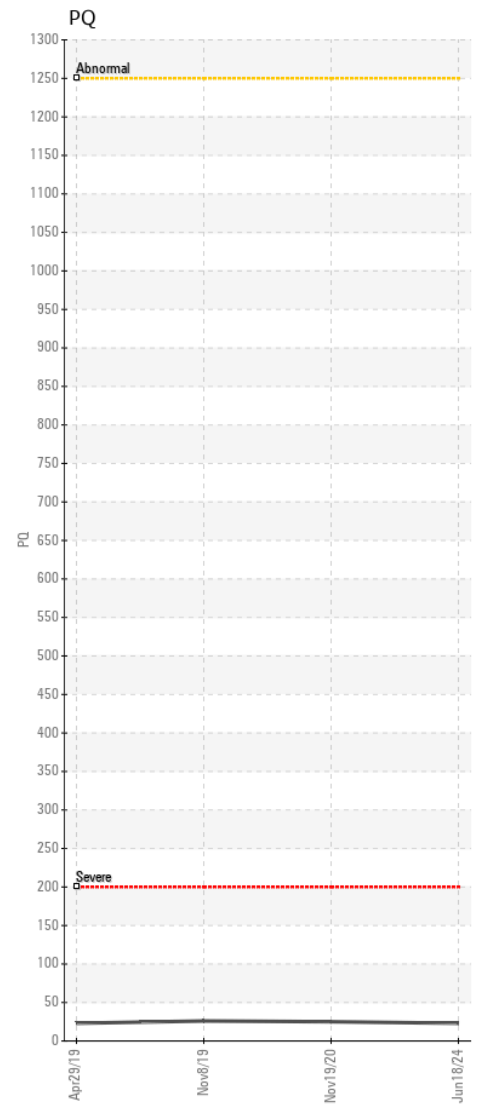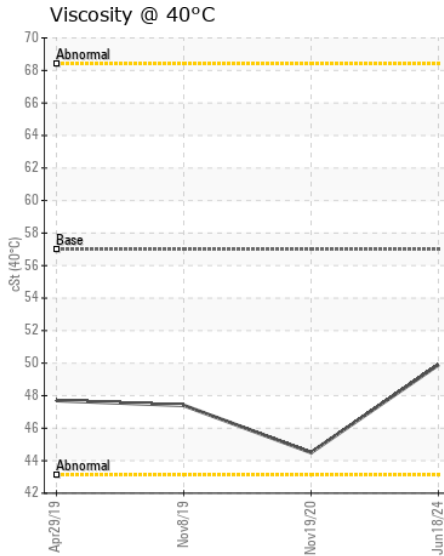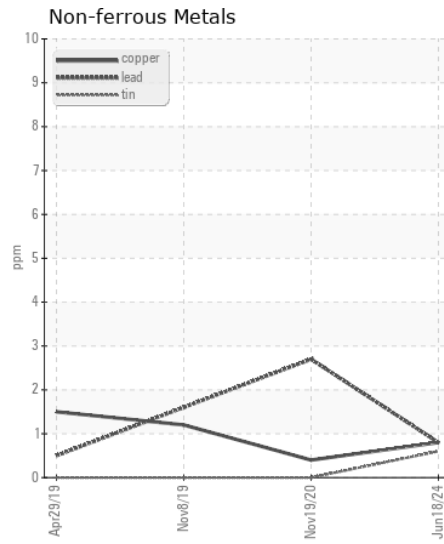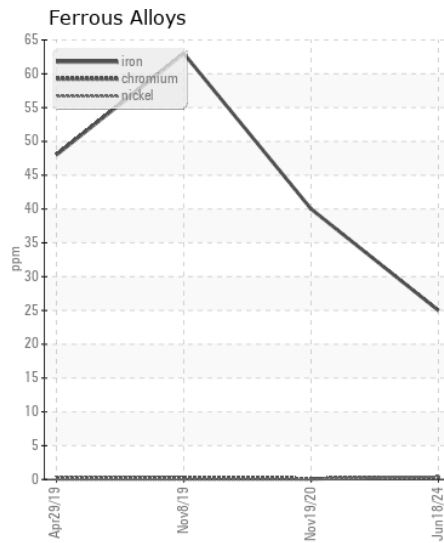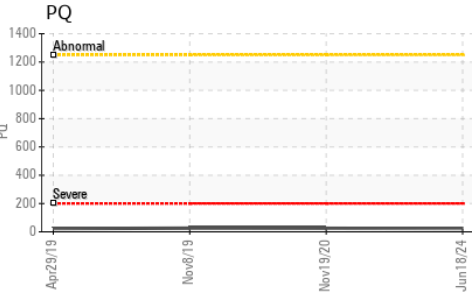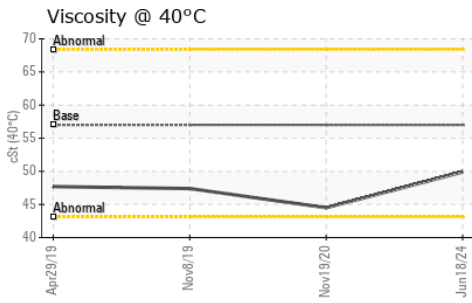

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0218727

Lab Number : 06218530

Unique Number : 11096727

Test Package : CONST (Additional Tests: PQ)

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Wes Davis

JRE - ASHEVILLE

101 BRUCE DRIVE

ASHEVILLE, NC

US 28806

Contact: Randy Warren

randy.warren@jamesriverequipment.com

T: (528)667-0176

F: (828)667-4865

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)