



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 4 - Fairmont [RO# 152173]**  
Machine Id  
**JOHN DEERE 650P 1T0650PAHPLX03124**  
Component  
**Left Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (2 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0051053</b>	---	---
Sample Date		Client Info		<b>17 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>331</b>	---	---
Oil Age	hrs	Client Info		<b>331</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>69</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>91</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>10</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>30</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>3</b>	---	---
Boron	ppm	ASTM D5185m	6	<b>2</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>119</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>4177</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1221</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>1442</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4267</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.7</b>	---	---

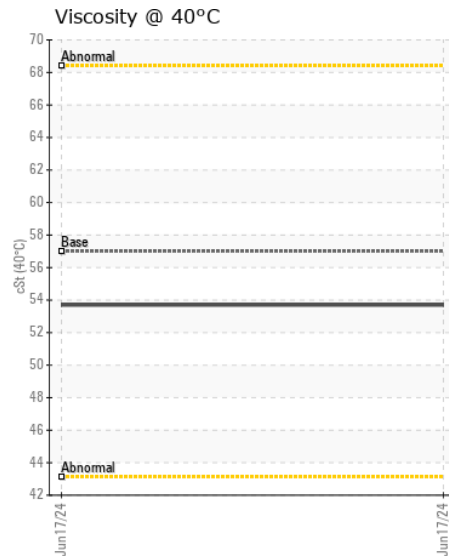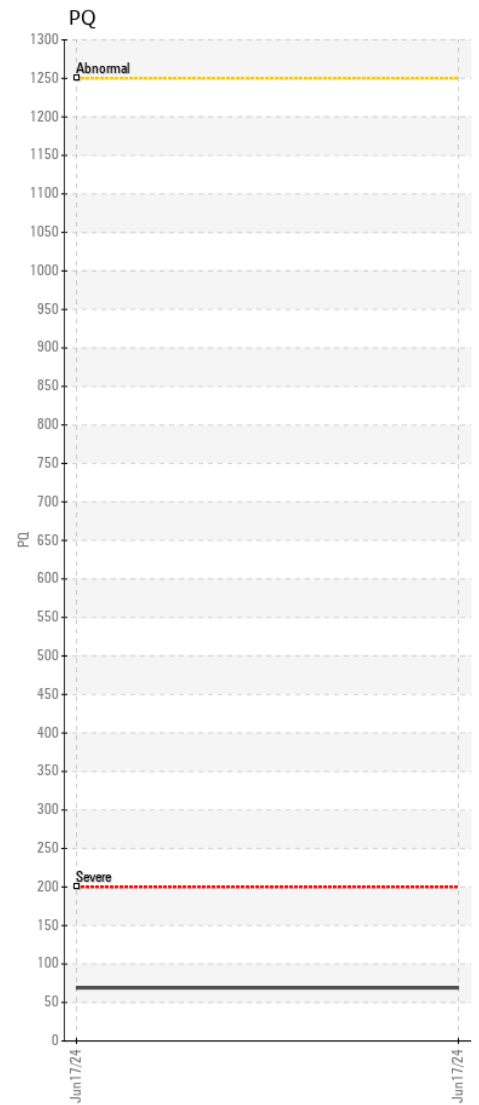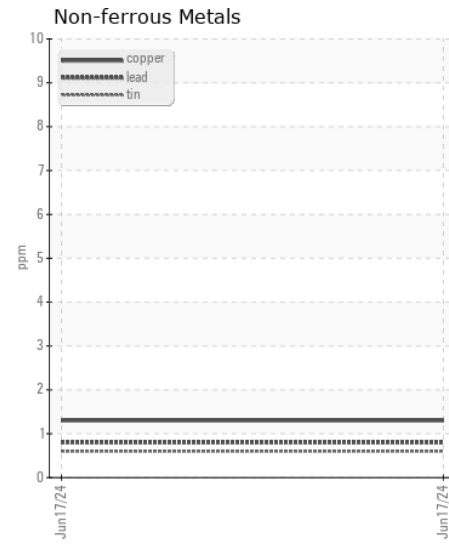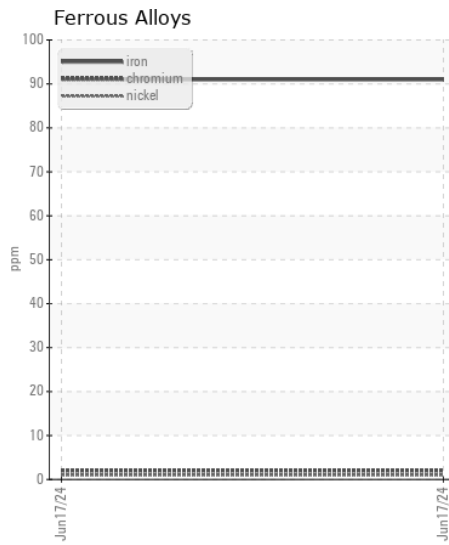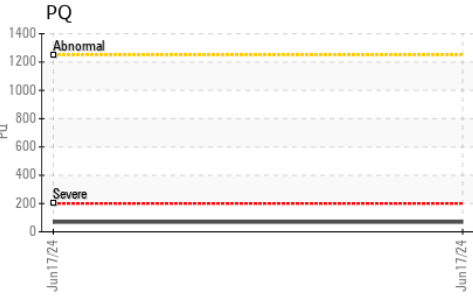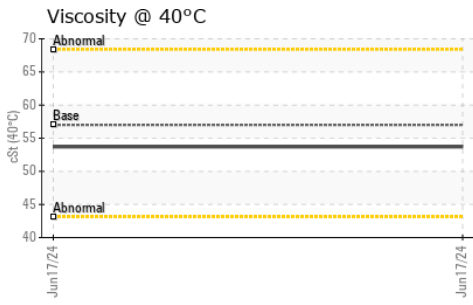

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0051053 **Received** : 24 Jun 2024  
**Lab Number** : 06218546 **Tested** : 25 Jun 2024  
**Unique Number** : 11096743 **Diagnosed** : 25 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

T:  
F: (740)373-5570