



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[42313]

Machine Id

VOLVO A45G 752155

Component

Front Axle

Fluid

VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439860	---	---
Sample Date		Client Info		20 Jun 2024	---	---
Machine Age	hrs	Client Info		1121	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	308	---	---
Chromium	ppm	ASTM D5185m	>20	5	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>30	3	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>150	2	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	7	---	---
Potassium	ppm	ASTM D5185m	>20	9	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	379	263	---	---
Barium	ppm	ASTM D5185m	0.0	5	---	---
Molybdenum	ppm	ASTM D5185m	0.8	12	---	---
Manganese	ppm	ASTM D5185m	0.0	15	---	---
Magnesium	ppm	ASTM D5185m	31	3	---	---
Calcium	ppm	ASTM D5185m	38	1216	---	---
Phosphorus	ppm	ASTM D5185m	1077	2382	---	---
Zinc	ppm	ASTM D5185m	46	526	---	---
Sulfur	ppm	ASTM D5185m	23526	23202	---	---

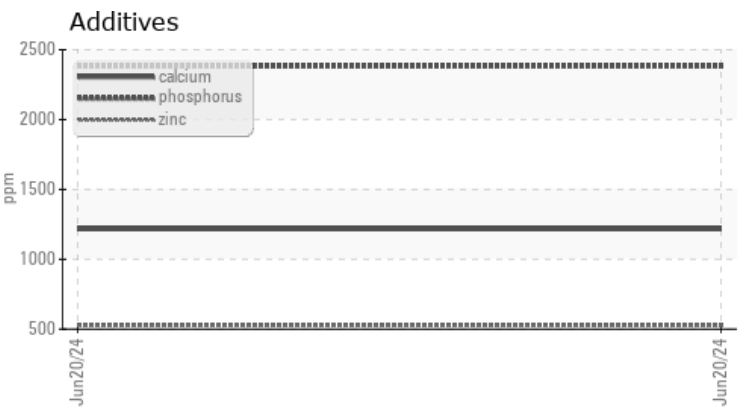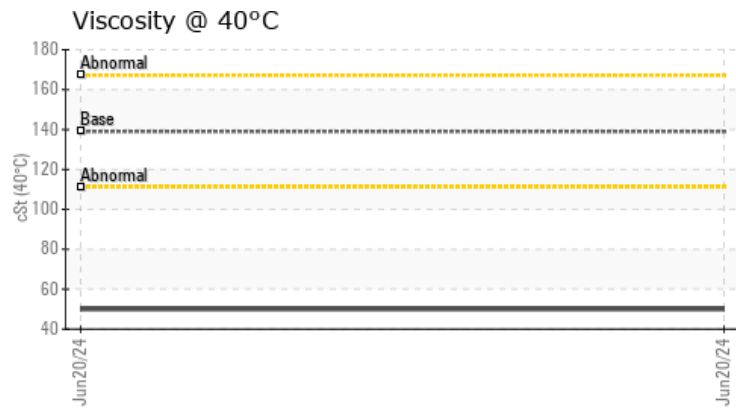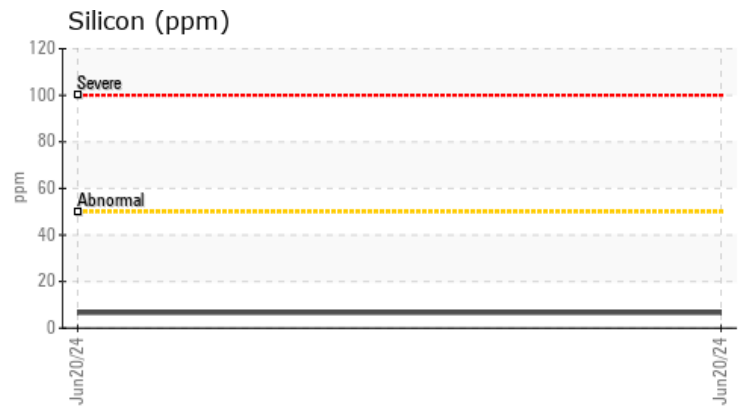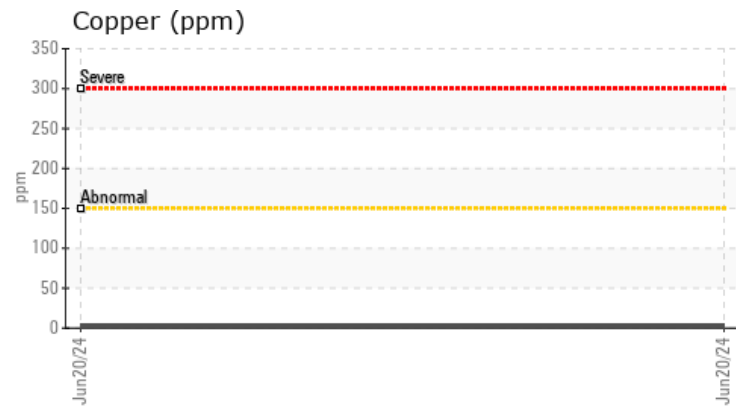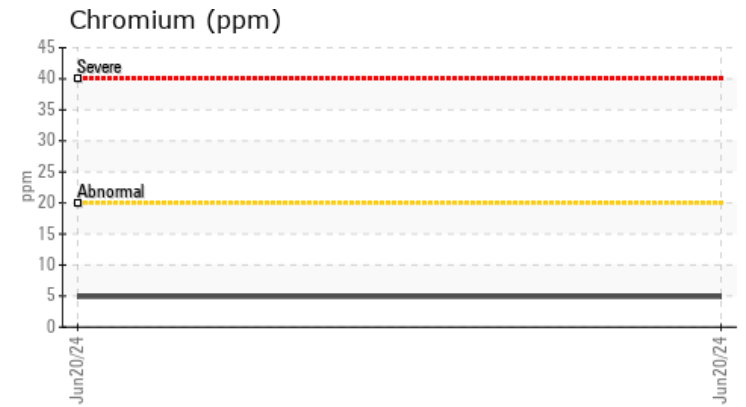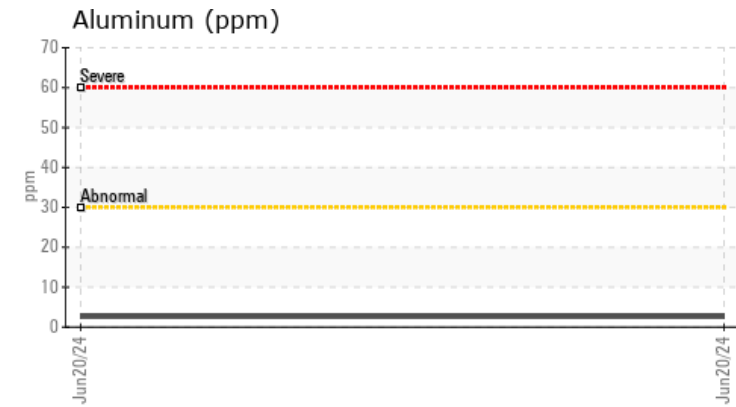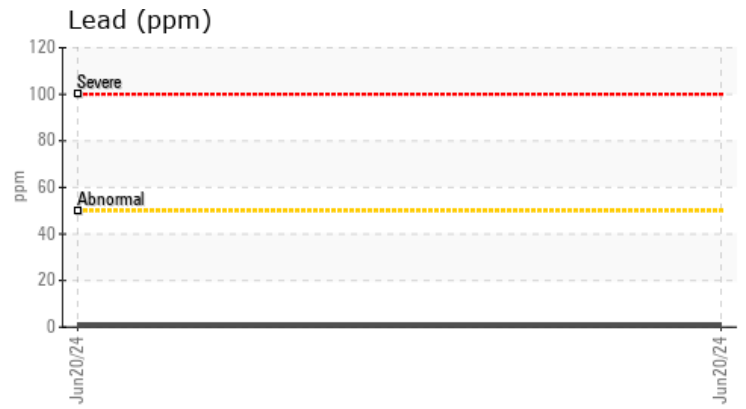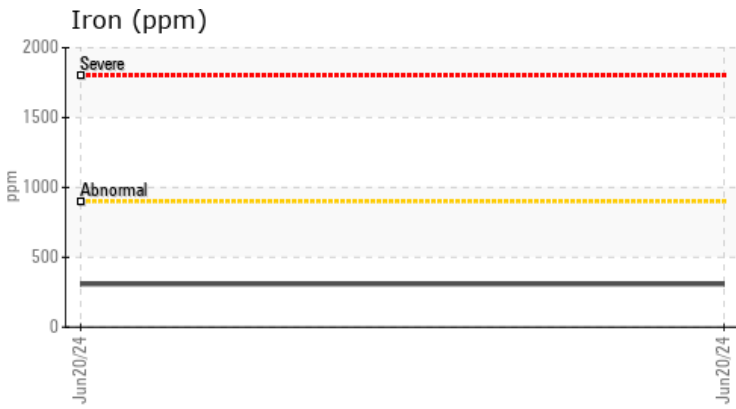

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439860
Lab Number : 06218935
Unique Number : 11097132
Test Package : MOB 1

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 26 Jun 2024 - Sean Felton

LANDMARK CONSTRUCTION CO. INC./MEM
 3255 INDUSTRY DRIVE
 NORTH CHARLESTON, SC
 US 29418

Contact: GENE RICHARDSON
 grichardson@landmark-sc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (843)767-9741
 F: (843)767-9909