



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO A45G 353695
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP397549	---	---
Sample Date		Client Info		14 May 2024	---	---
Machine Age	hrs	Client Info		865	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	10	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>2	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>40	2	---	---
Copper	ppm	ASTM D5185m	>330	14	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	0	81	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	56	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	0	701	---	---
Calcium	ppm	ASTM D5185m		1568	---	---
Phosphorus	ppm	ASTM D5185m		819	---	---
Zinc	ppm	ASTM D5185m		964	---	---
Sulfur	ppm	ASTM D5185m		3856	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.8	---	---
Visc @ 100°C	cSt	ASTM D445	14	13.0	---	---

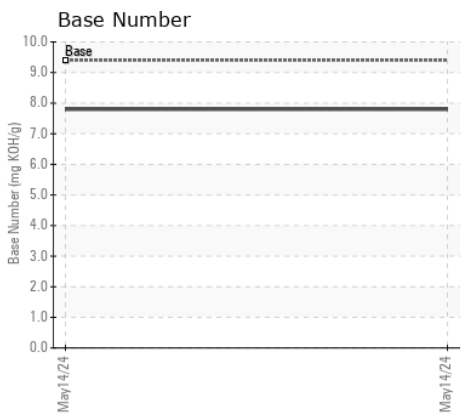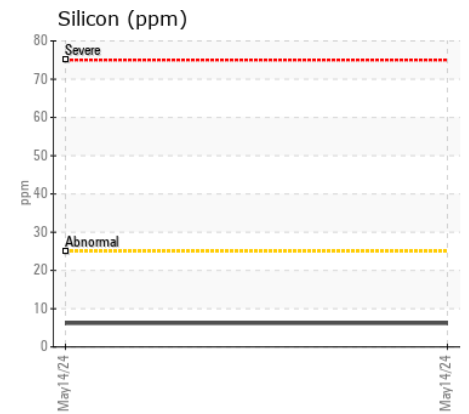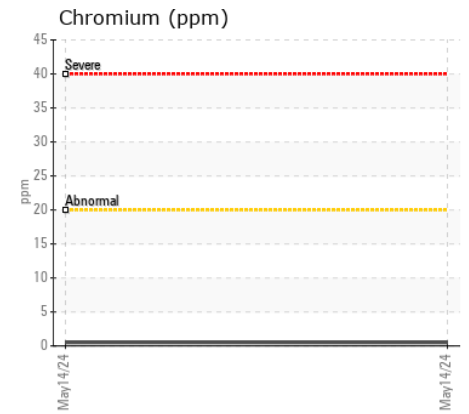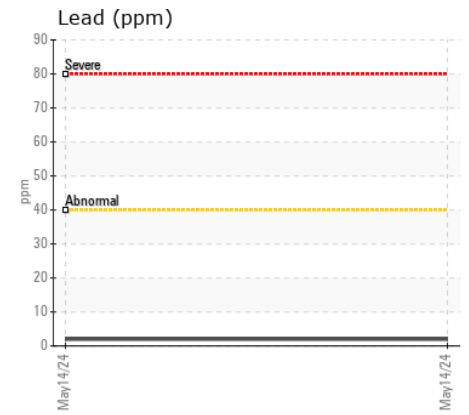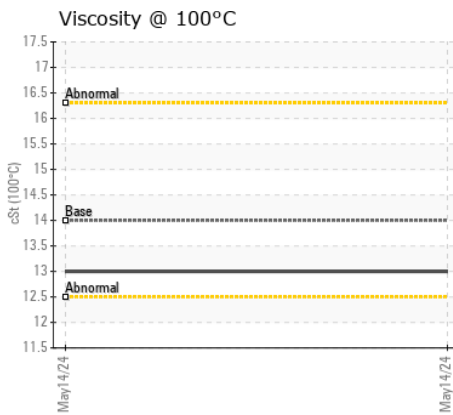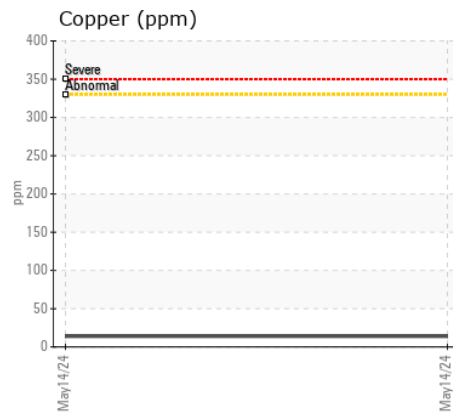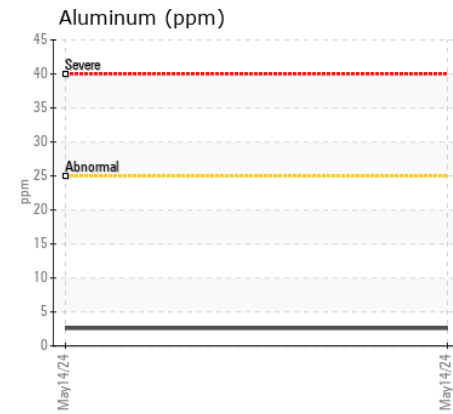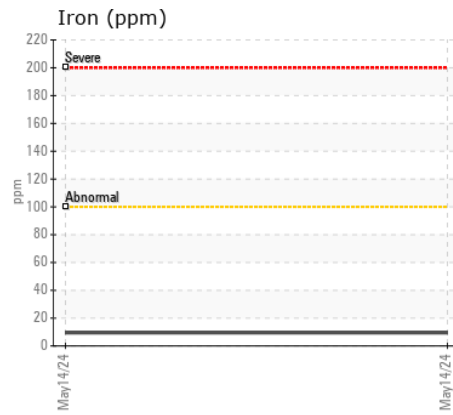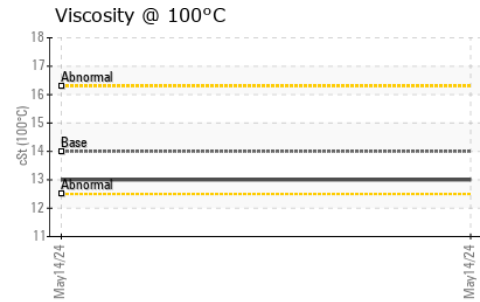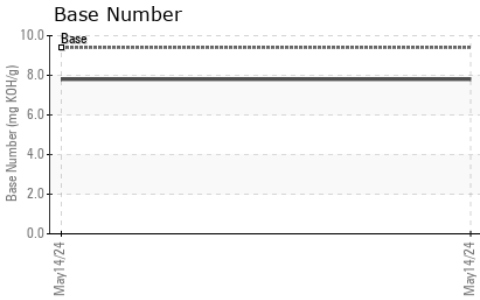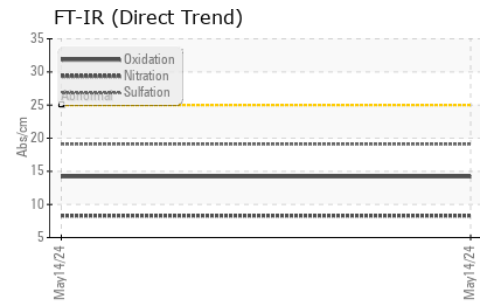

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP397549 Received : 24 Jun 2024
 Lab Number : 06219044 Tested : 25 Jun 2024
 Unique Number : 11097241 Diagnosed : 25 Jun 2024 - Wes Davis
 Test Package : MOB 1 (Additional Tests: TBN)

DUNN CONSTRUCTION INC
 318 N 14TH ST
 BELLEVUE, IA
 US 52031
 Contact: STEVE DUNN
 DUNNCONSTRUCTINC@GMAIL.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)