



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Pillen Family Farms
 Machine Id
DBTK17
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		SBP0006848	SBP0006814	SBP0006182
Sample Date		Client Info		03 Jun 2024	18 Mar 2024	12 Jan 2024
Machine Age	mls	Client Info		12000	12000	12000
Oil Age	mls	Client Info		0	0	12000
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	4	3	<1
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>30	3	2	1
Lead	ppm	ASTM D5185m	>30	<1	0	1
Copper	ppm	ASTM D5185m	>150	12	10	10
Tin	ppm	ASTM D5185m	>5	1	0	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	2	2
Potassium	ppm	ASTM D5185m	>20	2	0	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	7.9	7.7	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	18.3	18.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	<1
Boron	ppm	ASTM D5185m	0	<1	<1	0
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	64	53	62
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	0	967	947	938
Calcium	ppm	ASTM D5185m		1123	1054	1036
Phosphorus	ppm	ASTM D5185m		1096	869	1045
Zinc	ppm	ASTM D5185m		1265	1186	1206
Sulfur	ppm	ASTM D5185m		2851	3076	2830
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	16.1	15.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.3	8.0	8.5
Visc @ 100°C	cSt	ASTM D445	14	13.5	13.9	13.3

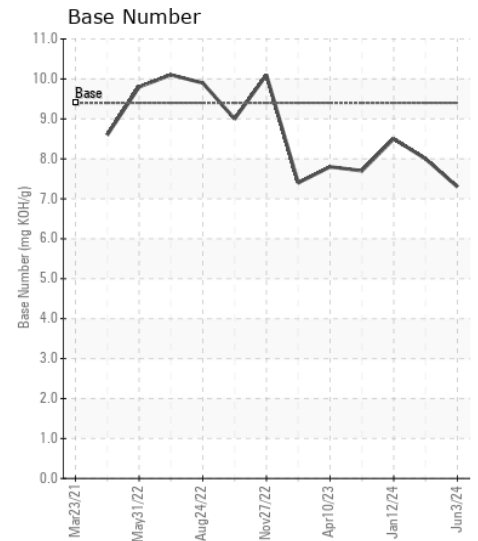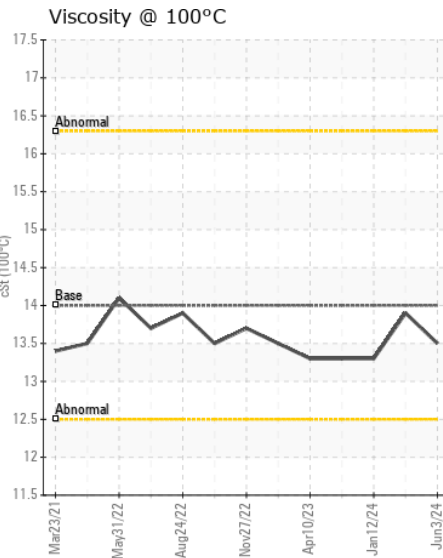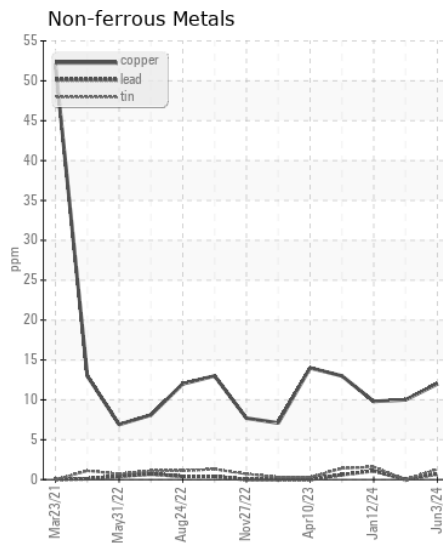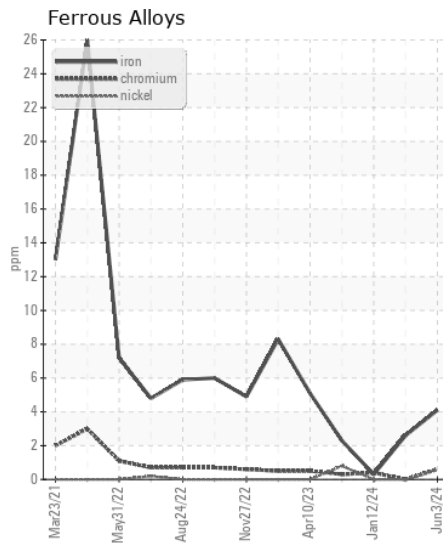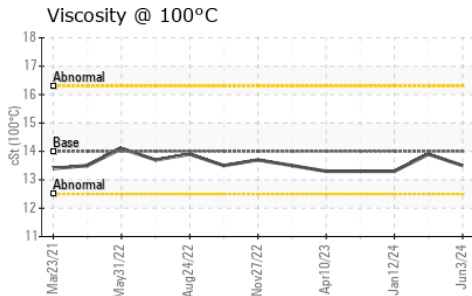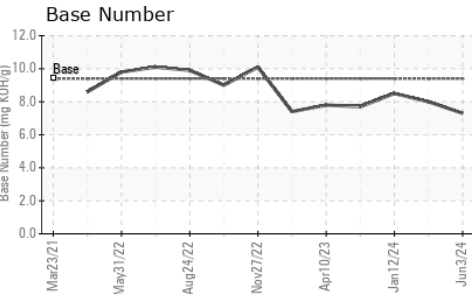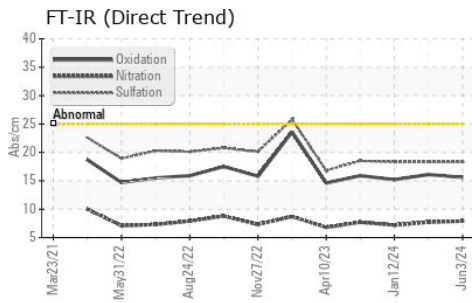

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0006848
Lab Number : 06219221
Unique Number : 11097418
Test Package : FLEET

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 26 Jun 2024 - Jonathan Hester

Pillen Family Farms - 722828

26741 NE-91
 Humphrey, NE
 US 61357

Contact: Troy Runge
 troyfr@pillenfamilyfarms.com

T: (308)390-6733

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)