



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**RTA**  
Machine Id  
Component  
**RTA**  
Starboard Genset  
Fluid  
**CHEVRON DELO 710 LS (5 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0065340</b>	MW0065338	MW0065337
Sample Date		Client Info		<b>16 Jun 2024</b>	26 May 2024	06 May 2024
Machine Age	hrs	Client Info		<b>20591</b>	20344	20099
Oil Age	hrs	Client Info		<b>247</b>	245	258
Filter Age	hrs	Client Info		<b>247</b>	245	258
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>1</b>	2	2
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>12	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>17	<b>0</b>	0	1
Copper	ppm	ASTM D5185m	>70	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	<1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.8</b>	6.8	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>14.2</b>	14.2	14.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	1	1
Boron	ppm	ASTM D5185m		<b>42</b>	43	47
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>44</b>	45	45
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>11</b>	29	4
Calcium	ppm	ASTM D5185m		<b>3447</b>	3570	3470
Phosphorus	ppm	ASTM D5185m		<b>0</b>	10	0
Zinc	ppm	ASTM D5185m		<b>0</b>	14	0
Sulfur	ppm	ASTM D5185m		<b>2504</b>	2603	2413
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>8.9</b>	9.0	9.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>5.8</b>	6.0	6.0
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.9</b>	13.8	13.9

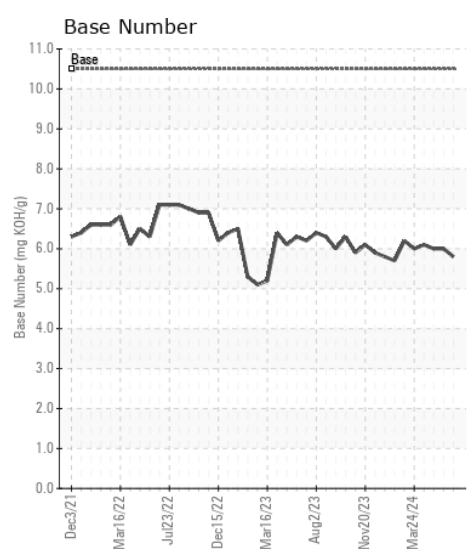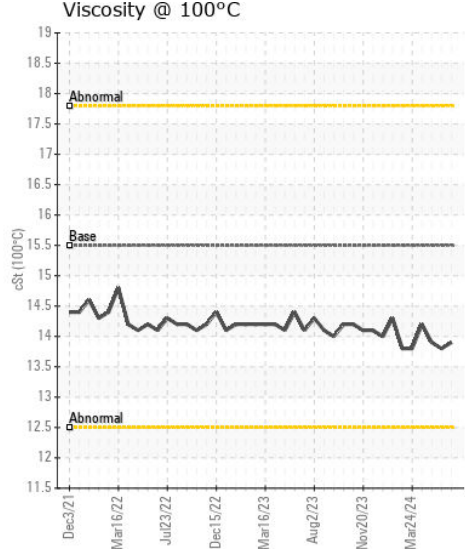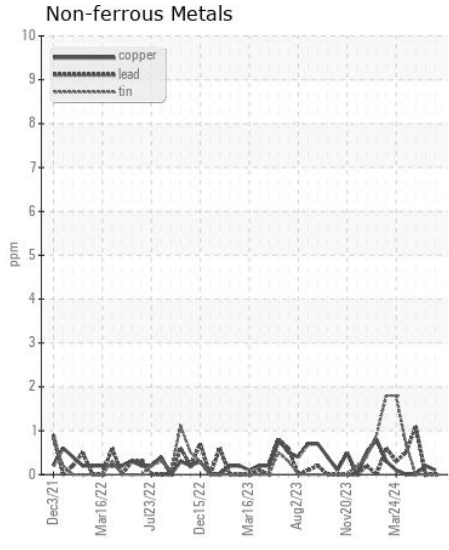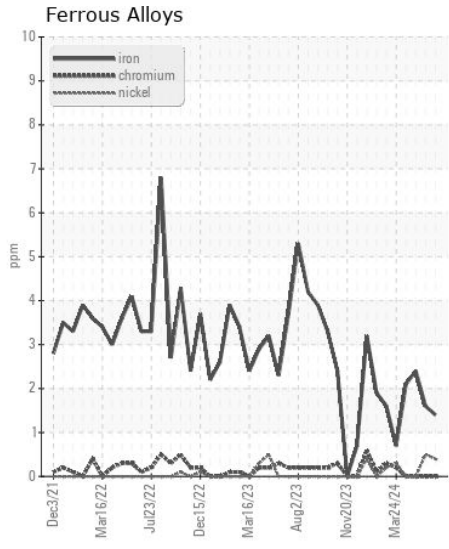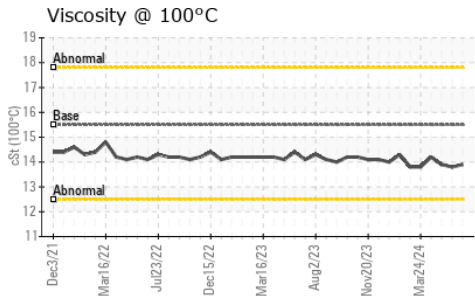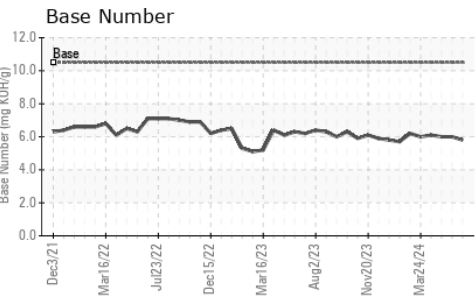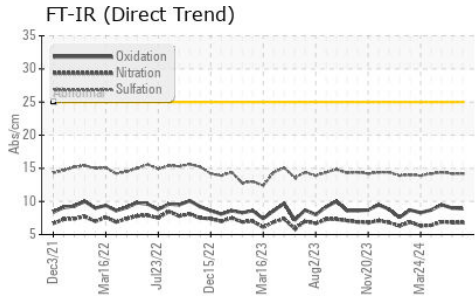

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0065340  
**Lab Number** : 06219387  
**Unique Number** : 11097584  
**Test Package** : MAR 2

**Received** : 25 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Wes Davis

**AMERICAN RIVER TRANSPORTATION CO.**  
 P.O. BOX 2889  
 ST. LOUIS, MO  
 US 63111  
 Contact: BRIAN GRIEWING  
 brian.griewing@adm.com  
 T:  
 F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)