



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
NOT GIVEN JR0216868 (S/N NO INFO ON SIF/BOTTLE)

Component
Rear Left Final Drive

Fluid
GEAR OIL LS 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL LS 80W90. Please confirm.
 Please specify the component make and model with your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | JR0216868 | --- | --- |
| Sample Date | | Client Info | | 25 Jun 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 0 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| PQ | | ASTM D8184 | | 19 | --- | --- |
| Iron | ppm | ASTM D5185m | >500 | 35 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 3 | --- | --- |
| Lead | ppm | ASTM D5185m | >25 | 5 | --- | --- |
| Copper | ppm | ASTM D5185m | >50 | 16 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION






There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >75 | 25 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 6 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 1 | --- | --- |
| Boron | ppm | ASTM D5185m | 150 | 3 | --- | --- |
| Barium | ppm | ASTM D5185m | | 9 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 1 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 10 | 2 | --- | --- |
| Calcium | ppm | ASTM D5185m | 70 | 268 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 2000 | 156 | --- | --- |
| Zinc | ppm | ASTM D5185m | 50 | 33 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 20000 | 17936 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 140 | 214 | --- | --- |

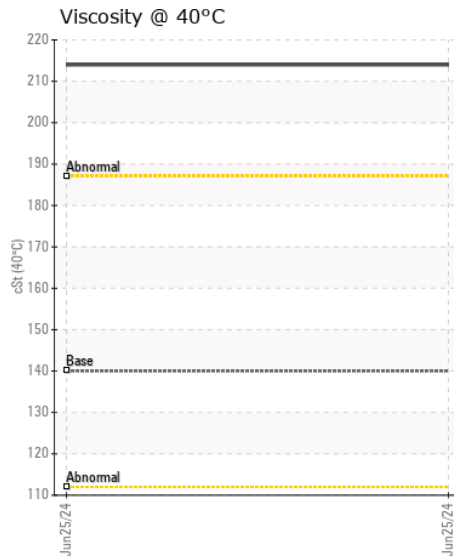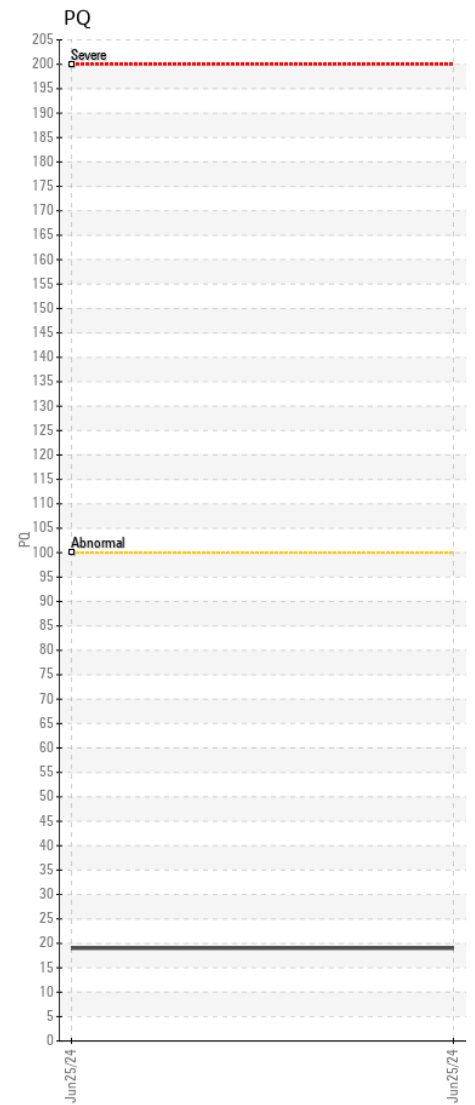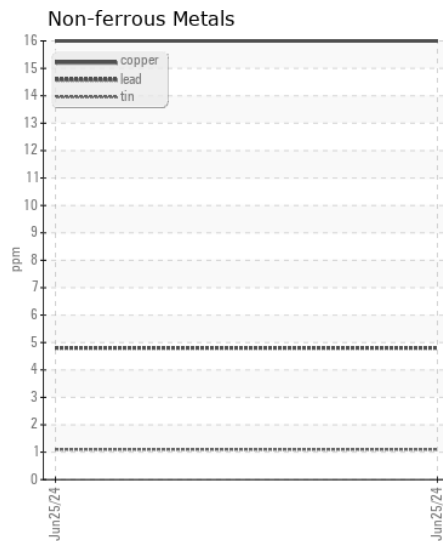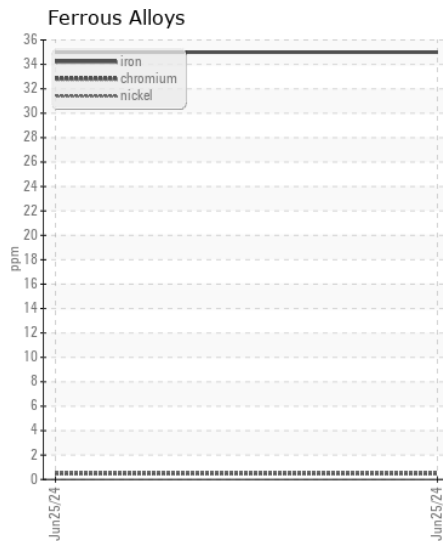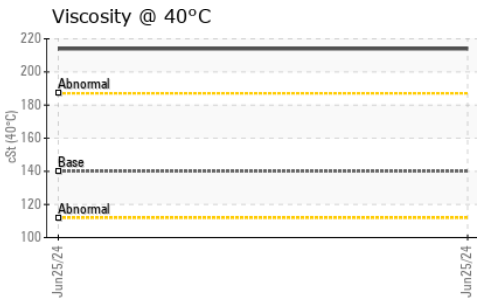

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0216868

Lab Number : 06219996

Unique Number : 11098193

Test Package : CONST (Additional Tests: PQ)

Received : 25 Jun 2024

Tested : 26 Jun 2024

Diagnosed : 26 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - WAKEFIELD

10489 GENERAL MAHONE HWY

WAKEFIELD, VA

US 23888

Contact: BILL ACKER

backer@jamesriverequipment.com

T: (757)899-3232

F: (757)899-6464