



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1926733
 Component
Rear Differential
 Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0125025	PCA0114120	PCA0102164
Sample Date		Client Info		28 May 2024	29 Dec 2023	26 Jul 2023
Machine Age	mls	Client Info		343741	307667	268913
Oil Age	mls	Client Info		343741	0	268913
Filter Age	mls	Client Info		343741	0	268913
Oil Changed		Client Info		Not Chngd	N/A	Not Chngd
Filter Changed		Client Info		Not Chngd	N/A	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	226	210	216
Chromium	ppm	ASTM D5185m	>10	1	1	2
Nickel	ppm	ASTM D5185m	>10	11	11	11
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	3	2
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	4	2	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	23	21	22
Potassium	ppm	ASTM D5185m	>20	4	1	3
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		10	9	10
Boron	ppm	ASTM D5185m	328	274	278	334
Barium	ppm	ASTM D5185m	1	<1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		18	17	19
Magnesium	ppm	ASTM D5185m	1	2	0	0
Calcium	ppm	ASTM D5185m	7	0	0	7
Phosphorus	ppm	ASTM D5185m	1145	1420	1343	1383
Zinc	ppm	ASTM D5185m	3	23	3	24
Sulfur	ppm	ASTM D5185m	17909	22138	24949	26460
Visc @ 40°C	cSt	ASTM D445	99.6	104	104	104

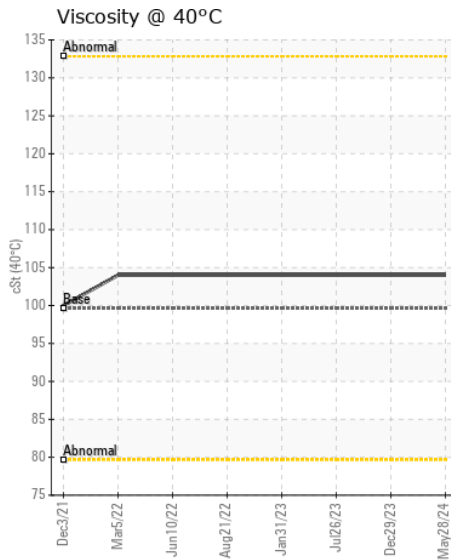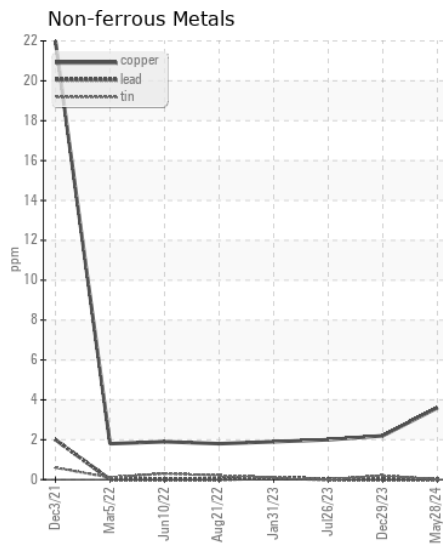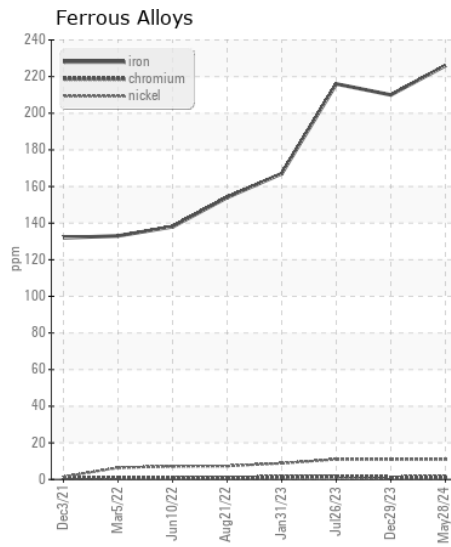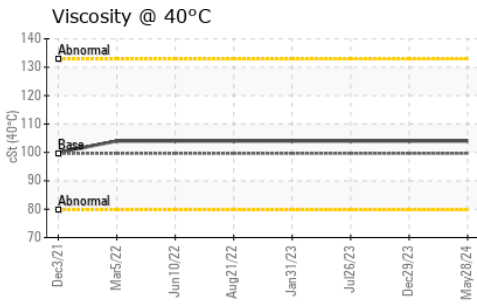

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0125025
Lab Number : 06220157
Unique Number : 11098354
Test Package : FLEET

Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 27 Jun 2024 - Sean Felton

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: