



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2227061**  
 Component  
**Transmission (Manual)**  
 Fluid  
**PETRO CANADA SYNGEAR E CD-50 (--- QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0113267</b>	PCA0124562	PCA0115441
Sample Date		Client Info		<b>09 Jun 2024</b>	14 Apr 2024	08 Jan 2024
Machine Age	mls	Client Info		<b>103263</b>	86361	64874
Oil Age	mls	Client Info		<b>103263</b>	86361	64874
Filter Age	mls	Client Info		<b>103263</b>	86361	64874
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>42</b>	41	54
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	<1	<1
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>225	<b>28</b>	26	28
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>47</b>	47	53
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>3</b>	3	2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>24</b>	25	31
Magnesium	ppm	ASTM D5185m		<b>1</b>	2	0
Calcium	ppm	ASTM D5185m		<b>839</b>	850	857
Phosphorus	ppm	ASTM D5185m		<b>708</b>	709	715
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>5747</b>	5724	5275
Visc @ 40°C	cSt	ASTM D445	138.2	<b>94.7</b>	97.0	98.3

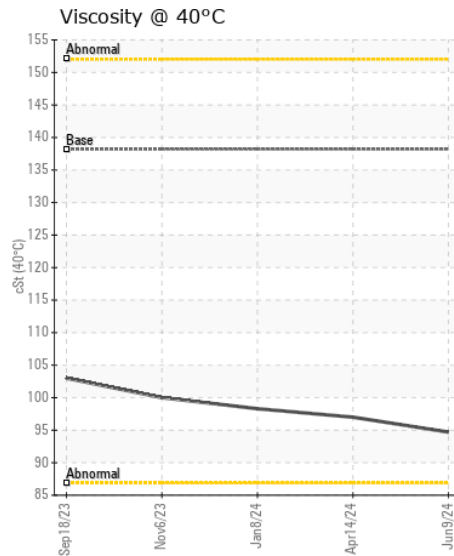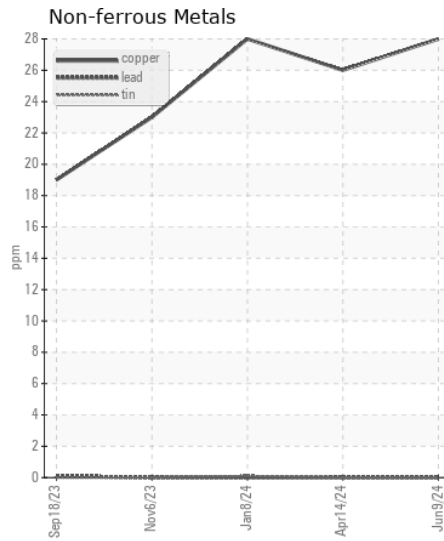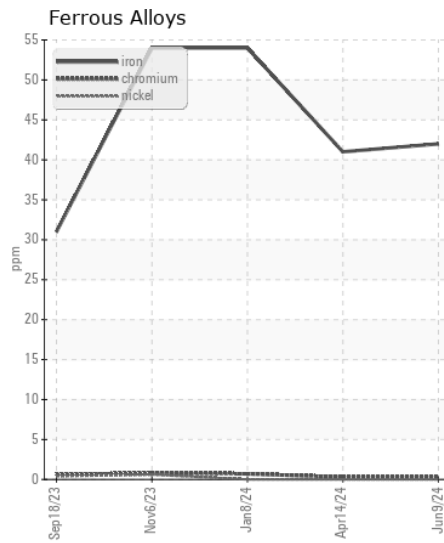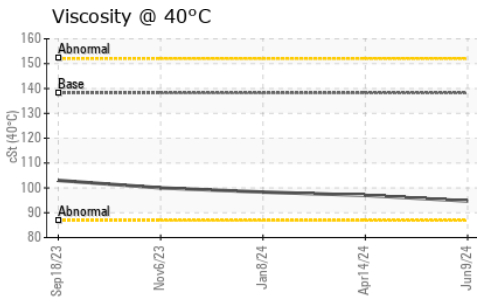

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113267  
**Lab Number** : 06220202  
**Unique Number** : 11098399  
**Test Package** : FLEET

**Received** : 25 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 26 Jun 2024 - Wes Davis

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: