



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1368**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0948921</b>	WC0761242	WC0706335
Sample Date		Client Info		<b>14 Jun 2024</b>	15 Dec 2022	29 Jun 2022
Machine Age	mls	Client Info		<b>214136</b>	200007	189721
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	16	33
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	4	6
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	2
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.0</b>	11.5	15.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.8</b>	21.2	28.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	4
Boron	ppm	ASTM D5185m	250	<b>68</b>	29	20
Barium	ppm	ASTM D5185m	10	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	100	<b>88</b>	79	86
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>88</b>	36	45
Calcium	ppm	ASTM D5185m	3000	<b>1992</b>	2026	2094
Phosphorus	ppm	ASTM D5185m	1150	<b>966</b>	950	898
Zinc	ppm	ASTM D5185m	1350	<b>1256</b>	1135	1092
Sulfur	ppm	ASTM D5185m	4250	<b>3615</b>	3330	3428
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	16.8	23.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.2</b>	6.3	5.9
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.7</b>	14.4	14.4

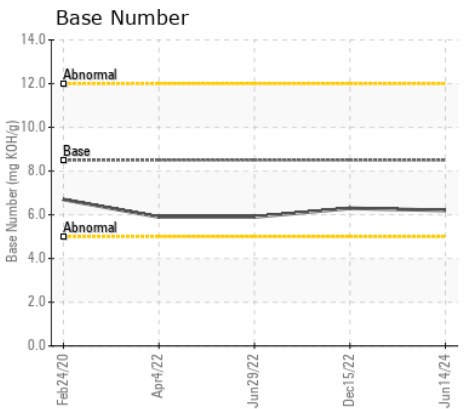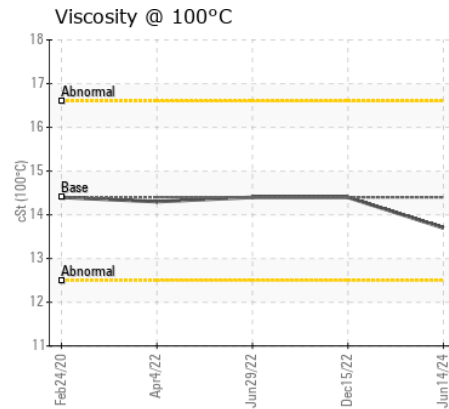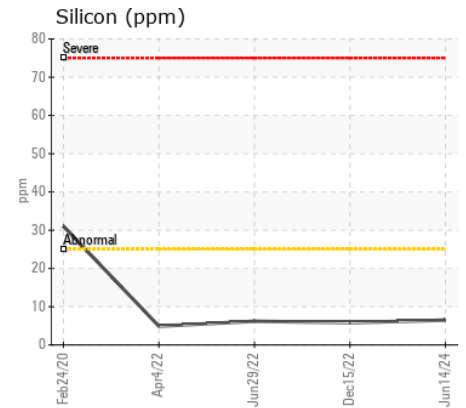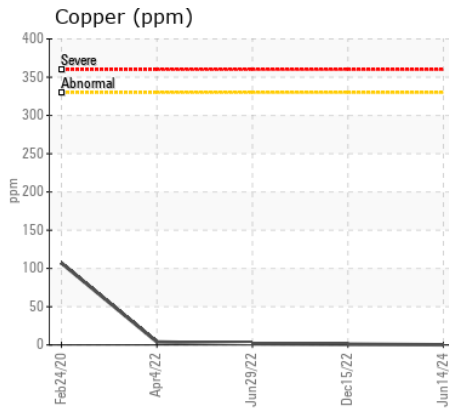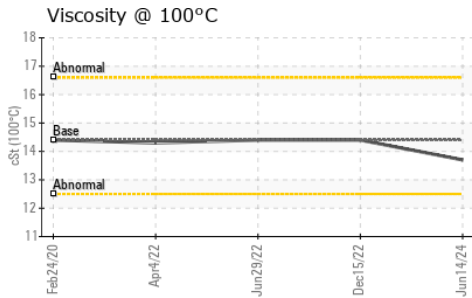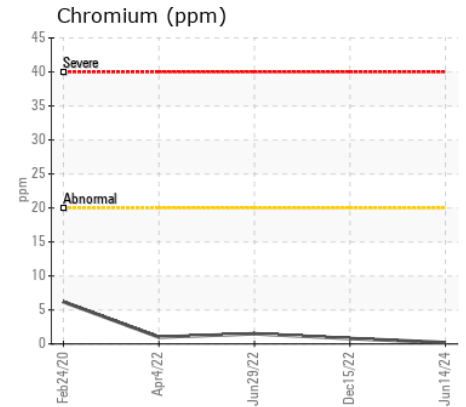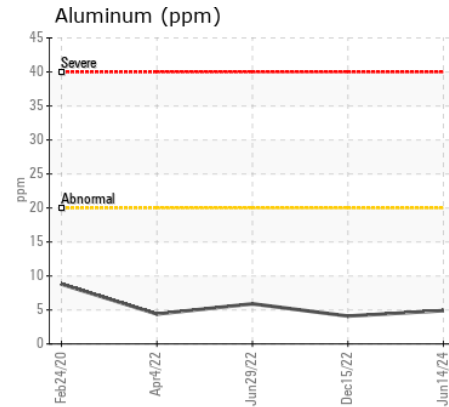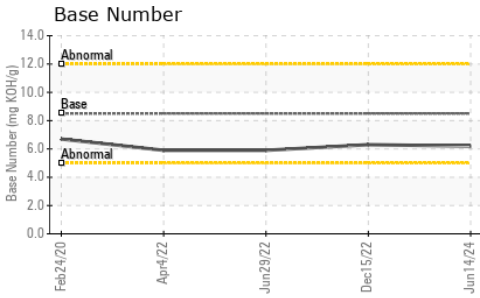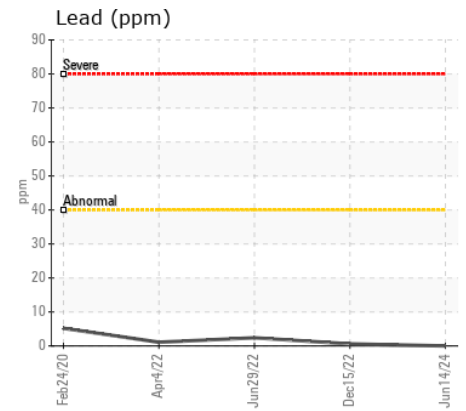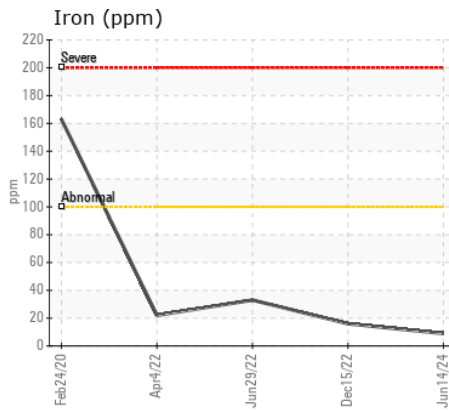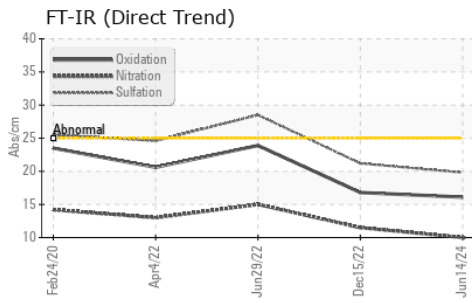

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0948921 **Received** : 26 Jun 2024  
**Lab Number** : 06220943 **Tested** : 27 Jun 2024  
**Unique Number** : 11099140 **Diagnosed** : 27 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610  
 Contact: DEVIN WEBER  
 dweber@wcpss.net  
 T: (919)856-8076  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)