



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 6 - Ashland [152447]
Machine Id
JOHN DEERE 844P 1DW844PAEPLX07140
Component
Rear Axle
Fluid
JOHN DEERE HY-GARD HYD/TRANS (18 GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051428	---	---
Sample Date		Client Info		24 Jun 2024	---	---
Machine Age	hrs	Client Info		417	---	---
Oil Age	hrs	Client Info		417	---	---
Filter Age	hrs	Client Info		417	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

PQ		ASTM D8184		195	---	---
Iron	ppm	ASTM D5185m	>750	368	---	---
Chromium	ppm	ASTM D5185m	>11	2	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	2	---	---
Lead	ppm	ASTM D5185m	>49	7	---	---
Copper	ppm	ASTM D5185m	>101	164	---	---
Tin	ppm	ASTM D5185m	>10	6	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	16	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	17	---	---
Boron	ppm	ASTM D5185m	6	99	---	---
Barium	ppm	ASTM D5185m	0	2	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m		81	---	---
Magnesium	ppm	ASTM D5185m	145	15	---	---
Calcium	ppm	ASTM D5185m	3570	3573	---	---
Phosphorus	ppm	ASTM D5185m	1290	1213	---	---
Zinc	ppm	ASTM D5185m	1640	1450	---	---
Sulfur	ppm	ASTM D5185m		3775	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	65.2	---	---

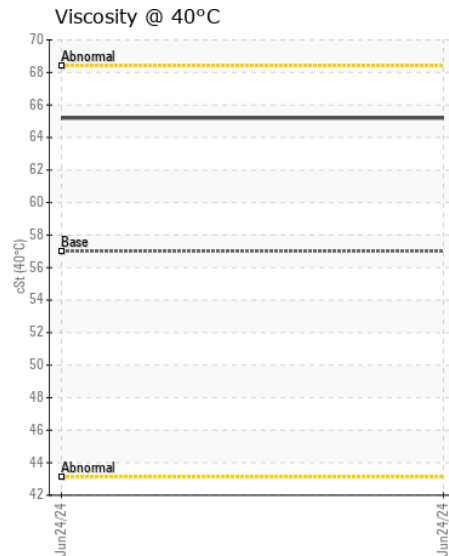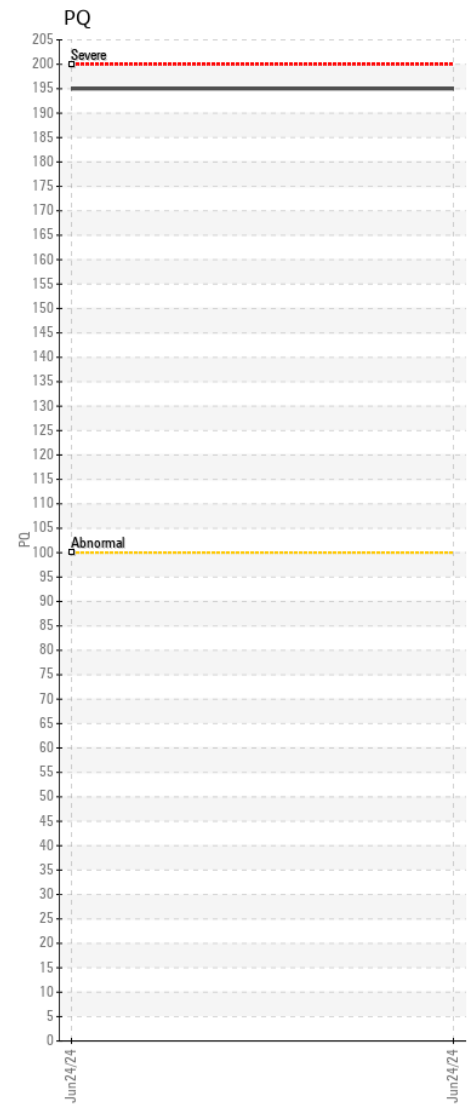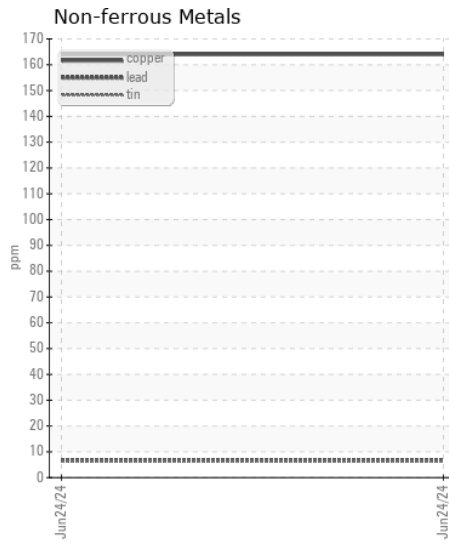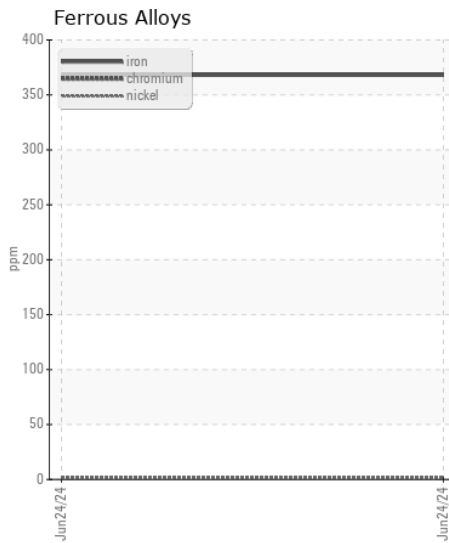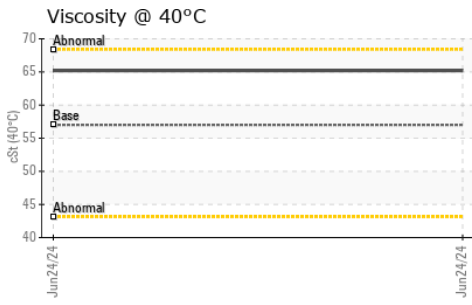

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051428 **Received** : 26 Jun 2024
Lab Number : **06221547** **Tested** : 27 Jun 2024
Unique Number : 11099744 **Diagnosed** : 28 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570