



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
LINKBELT LINKBELT 350
 Component
Diesel Engine
 Fluid
TRC MOLY XL PROSPEC III 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06222506	---	---
Sample Date		Client Info		26 Jun 2024	---	---
Machine Age	hrs	Client Info		3700	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	15	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	8	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		185	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		11	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		21	---	---
Calcium	ppm	ASTM D5185m	4500	2327	---	---
Phosphorus	ppm	ASTM D5185m		1014	---	---
Zinc	ppm	ASTM D5185m	1400	1111	---	---
Sulfur	ppm	ASTM D5185m		3250	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	15	9.30	---	---
Visc @ 100°C	cSt	ASTM D445	15.5	13.9	---	---

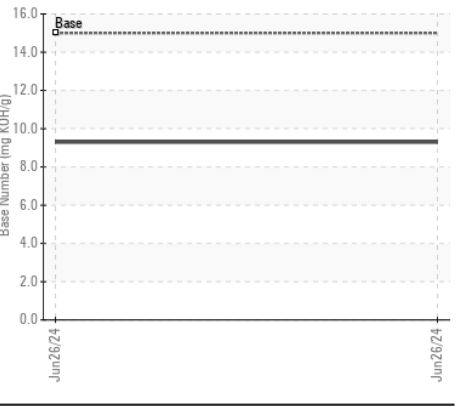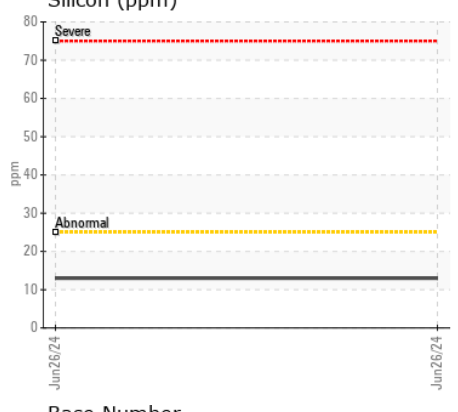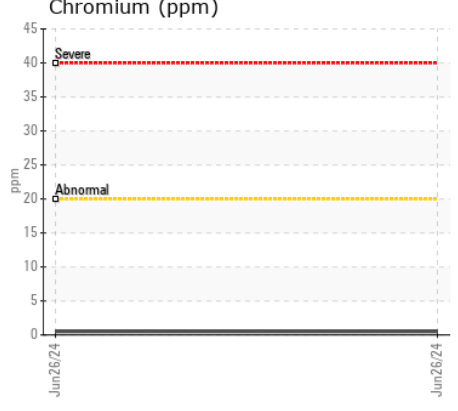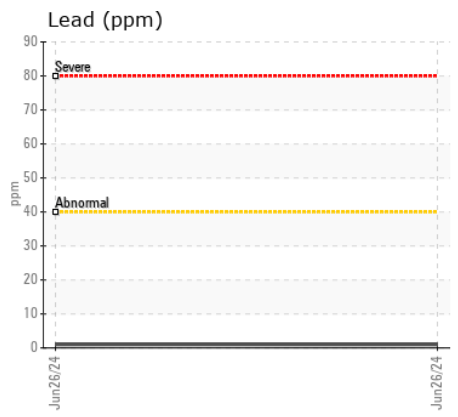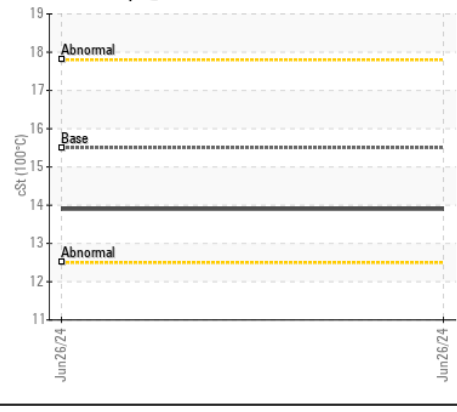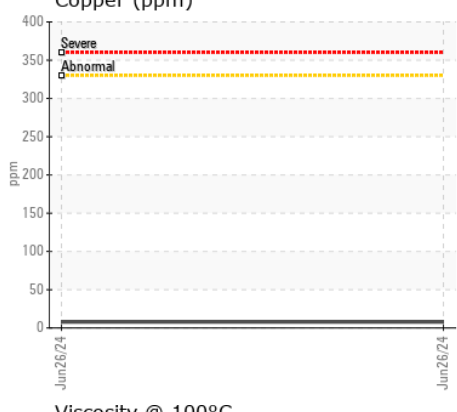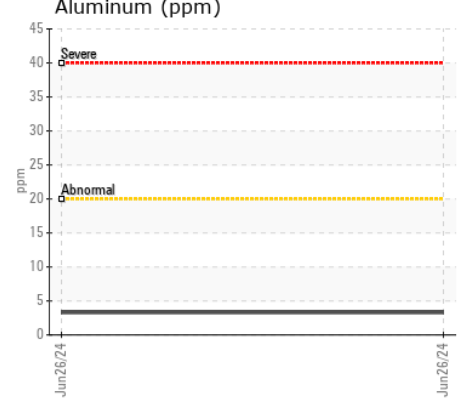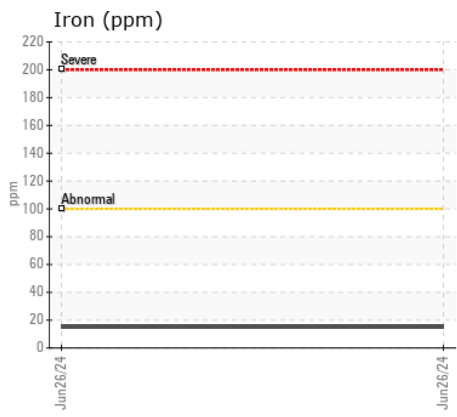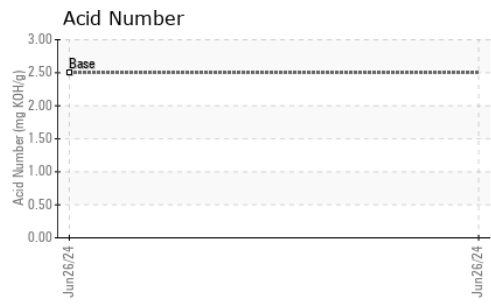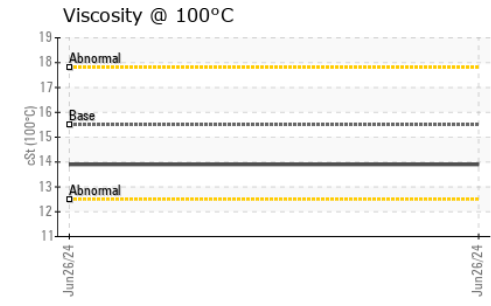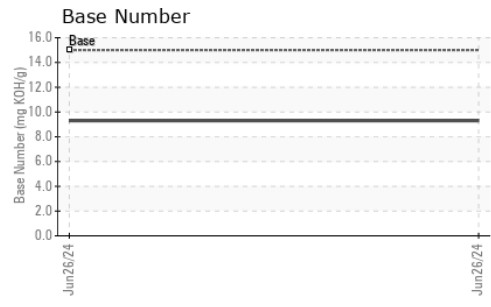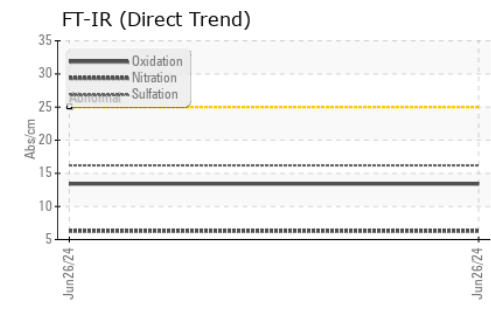

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06222506 **Received** : 27 Jun 2024
Lab Number : 06222506 **Tested** : 01 Jul 2024
Unique Number : 11100703 **Diagnosed** : 01 Jul 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: TAN Man)

MCCULLOUGH CRUSHING INC
 548 MCCULLOUGH HILL RD
 MIDDLESEX, VT
 US 05602
 Contact: IAN MCCULLOUGH
 MCCULLOUGHCRUSHING@GMAIL.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-827-0711.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)