



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INTERNATIONAL TD15 103
 Component
Hydraulic System
 Fluid
PETRO CANADA 10W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0917225	---	---
Sample Date		Client Info		10 Jun 2024	---	---
Machine Age	hrs	Client Info		11550	---	---
Oil Age	hrs	Client Info		4000	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	9	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	5	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	14	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		95	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		6	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		46	---	---
Calcium	ppm	ASTM D5185m		3117	---	---
Phosphorus	ppm	ASTM D5185m		1067	---	---
Zinc	ppm	ASTM D5185m		1324	---	---
Sulfur	ppm	ASTM D5185m		3172	---	---
Visc @ 40°C	cSt	ASTM D445		55.5	---	---

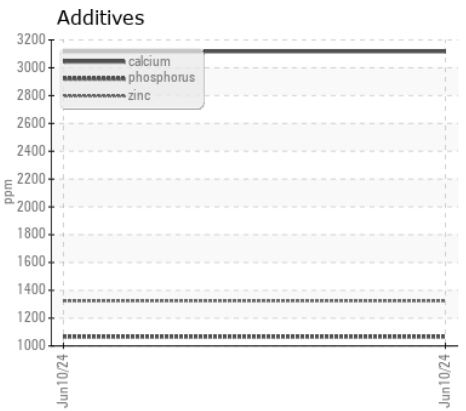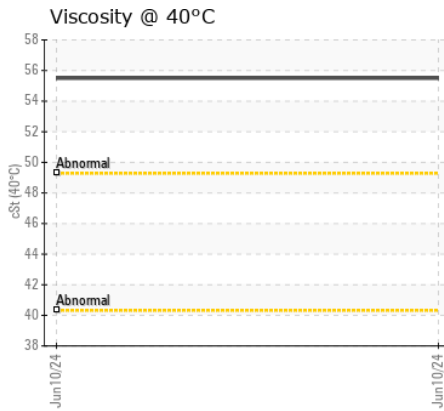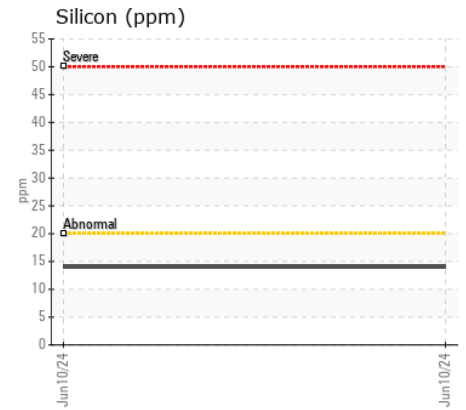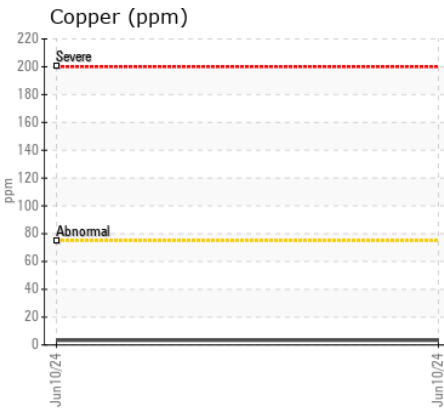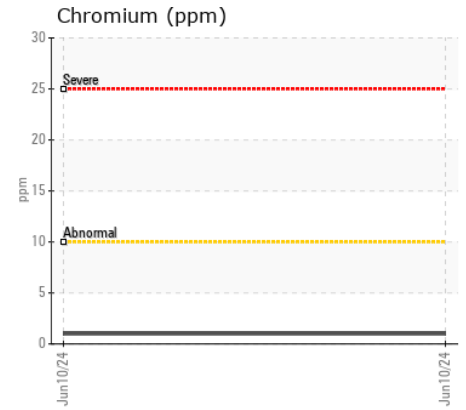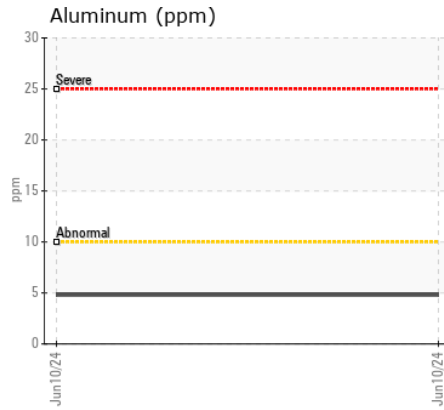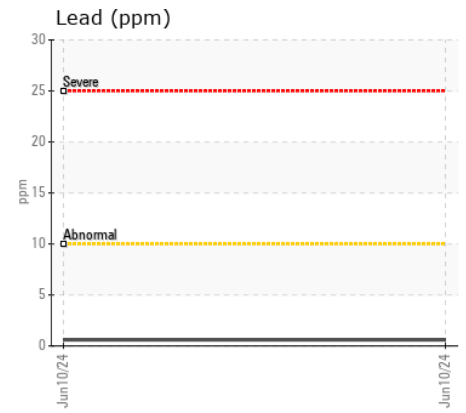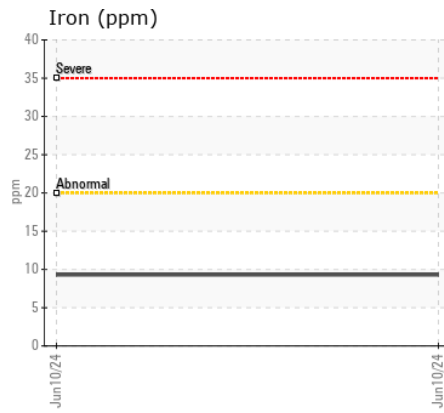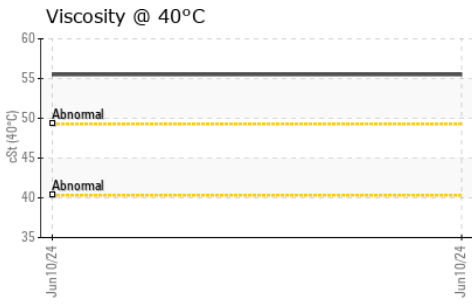

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0917225 **Received** : 27 Jun 2024
Lab Number : 06222699 **Tested** : 01 Jul 2024
Unique Number : 11100896 **Diagnosed** : 01 Jul 2024 - Jonathan Hester
Test Package : MOB 1

C.L. BENTON & SONS INC
 706 38TH AVE N
 MYRTLE BEACH, SC
 US 29577
 Contact: JAMIE HUCKS
 shop@clbenton.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: