



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 8271078

Component
Diesel Engine

Fluid
CHEVRON DELO 400 SAE 10W30 (45 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0004771	RPL0004801	---
Sample Date		Client Info		18 Jun 2024	07 Mar 2024	---
Machine Age	mls	Client Info		75887	45932	---
Oil Age	mls	Client Info		29955	45932	---
Filter Age	mls	Client Info		29955	45932	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	45	152	---
Chromium	ppm	ASTM D5185m	>5	1	7	---
Nickel	ppm	ASTM D5185m	>4	<1	2	---
Titanium	ppm	ASTM D5185m	>2	<1	<1	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	11	100	---
Lead	ppm	ASTM D5185m	>150	2	10	---
Copper	ppm	ASTM D5185m	>90	2	32	---
Tin	ppm	ASTM D5185m	>5	<1	8	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	12	42	---
Potassium	ppm	ASTM D5185m	>20	7	252	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>7.5	0.6	1.7	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	15.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.1	30.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	9	---
Boron	ppm	ASTM D5185m		132	14	---
Barium	ppm	ASTM D5185m		1	4	---
Molybdenum	ppm	ASTM D5185m		88	12	---
Manganese	ppm	ASTM D5185m		1	8	---
Magnesium	ppm	ASTM D5185m		398	754	---
Calcium	ppm	ASTM D5185m		1472	1403	---
Phosphorus	ppm	ASTM D5185m	1260	998	665	---
Zinc	ppm	ASTM D5185m	1400	1298	839	---
Sulfur	ppm	ASTM D5185m		2950	2754	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	30.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	6.1	4.0	---
Visc @ 100°C	cSt	ASTM D445	11.1	11.8	12.0	---

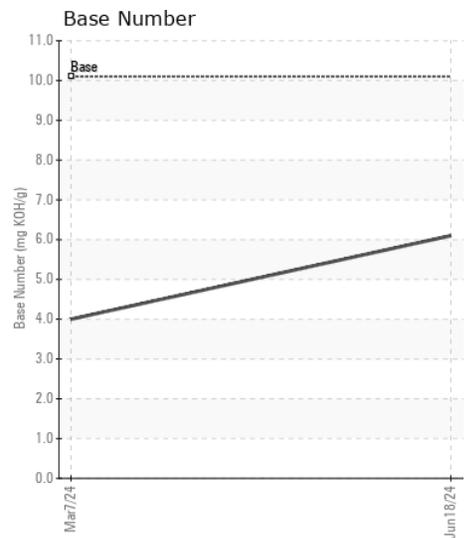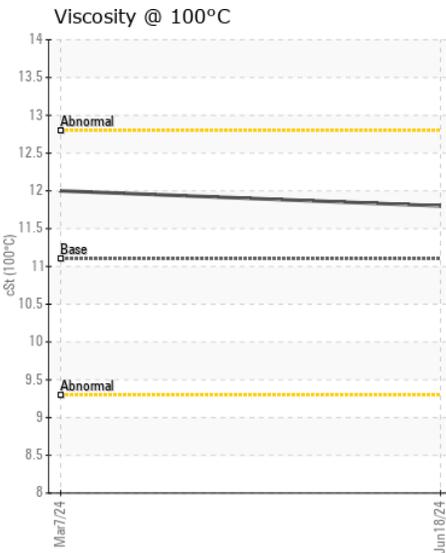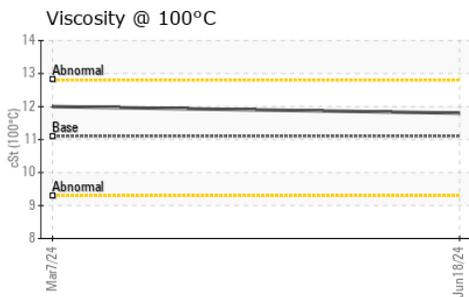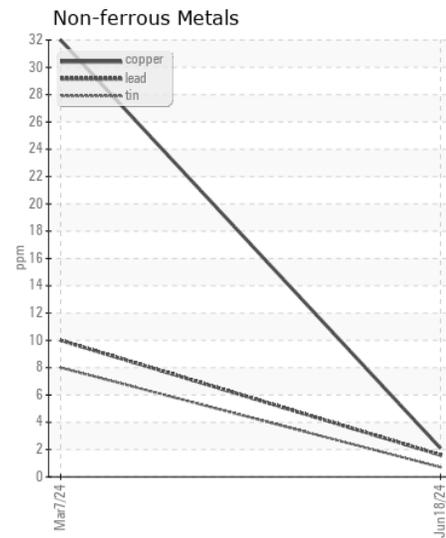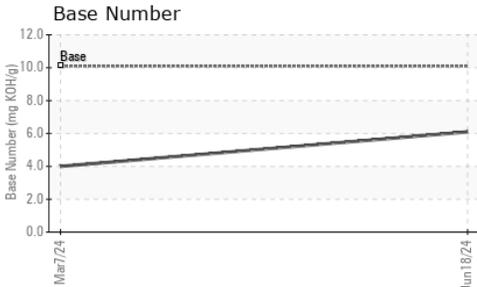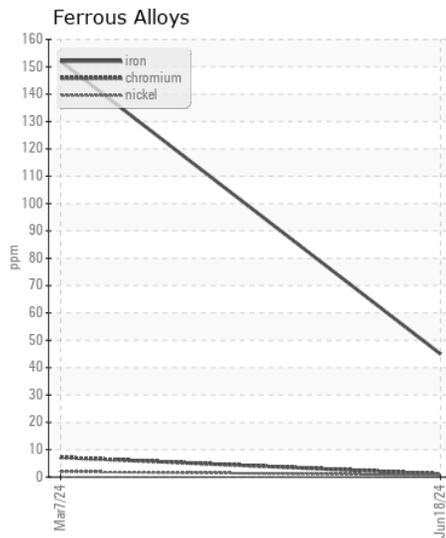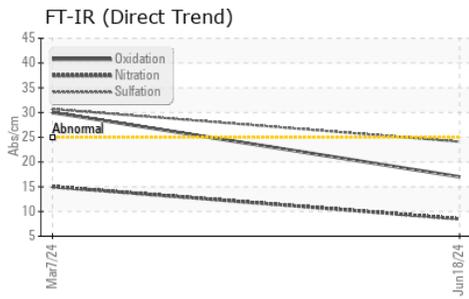

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0004771
Lab Number : 06223160
Unique Number : 11101357
Test Package : FLEET
Received : 28 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 30 Jun 2024 - Don Baldrige

RTL PACLEASE - 7009 - Nashville
 900 Expo Dr.
 Smyrna, TN
 US 37167
 Contact: Jon Atwood
 AtwoodJ@RushEnterprises.com
 T: (800)489-7403
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)