



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**213008**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0103527</b>	GFL0103564	GFL0085337
Sample Date		Client Info		<b>25 Jun 2024</b>	11 Jan 2024	11 Oct 2023
Machine Age	hrs	Client Info		<b>1621</b>	1109	808
Oil Age	hrs	Client Info		<b>1109</b>	1109	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	<b>34</b>	20	8
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>10</b>	8	6
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>1</b>	2	1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>7</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>20</b>	19	13
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	7.4	5.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.1</b>	19.5	18.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	2
Boron	ppm	ASTM D5185m	0	<b>2</b>	3	5
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	59	57
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>1044</b>	922	929
Calcium	ppm	ASTM D5185m	1070	<b>1158</b>	1104	1016
Phosphorus	ppm	ASTM D5185m	1150	<b>1124</b>	1010	1105
Zinc	ppm	ASTM D5185m	1270	<b>1421</b>	1193	1188
Sulfur	ppm	ASTM D5185m	2060	<b>3849</b>	3057	3621
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.5</b>	16.2	14.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.6</b>	8.2	9.2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.7</b>	13.1	14.1

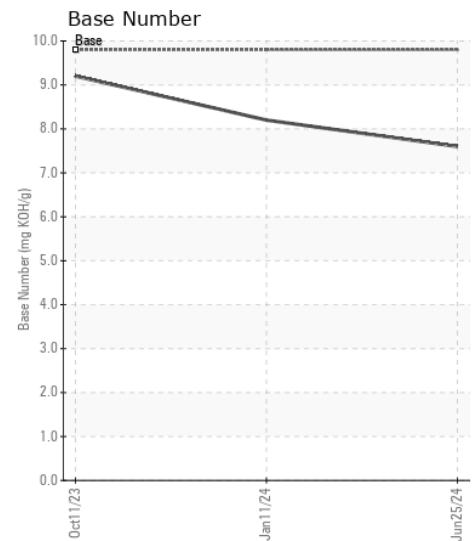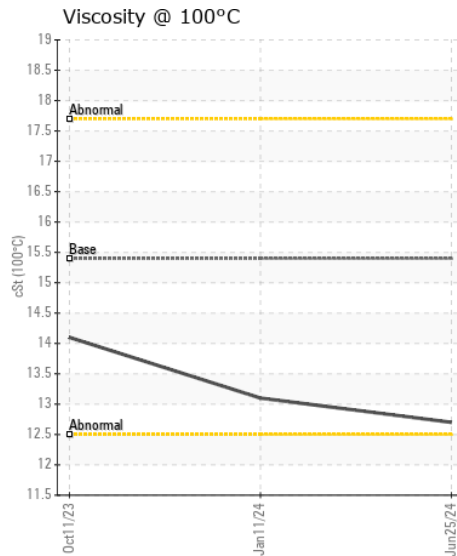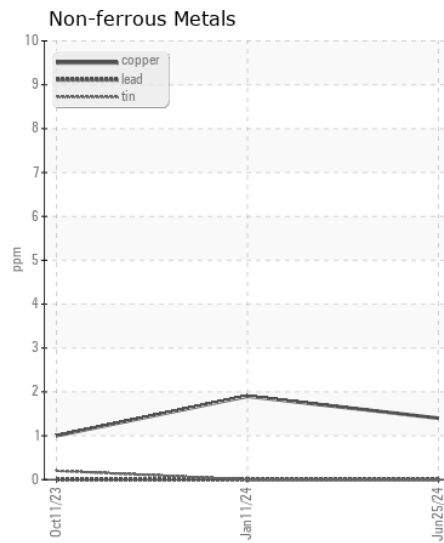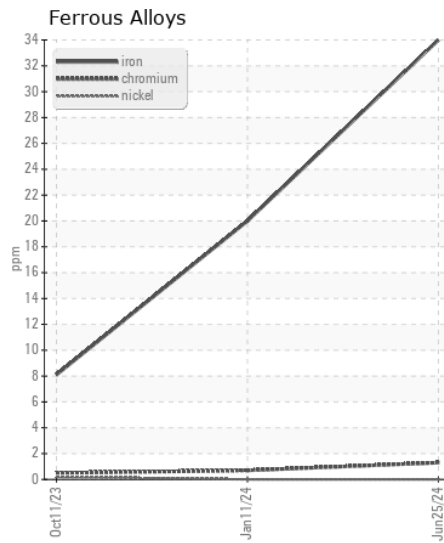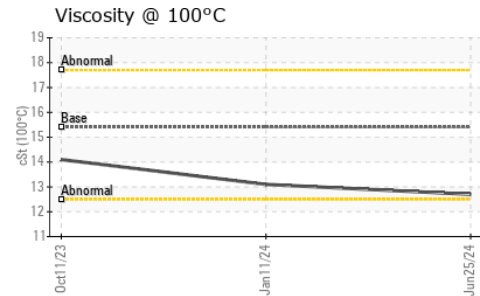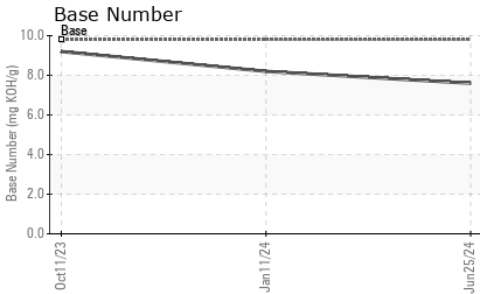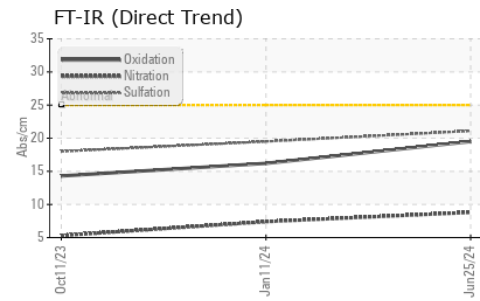

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103527  
**Lab Number** : 06223298  
**Unique Number** : 11101495  
**Test Package** : FLEET

**Received** : 28 Jun 2024  
**Tested** : 01 Jul 2024  
**Diagnosed** : 01 Jul 2024 - Wes Davis

**GFL Environmental - 958A - Chillicothe Wigan**  
 19908 N. State Rd 29  
 Chillicothe, IL  
 US 61523  
 Contact: Bryan Link  
 blink@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: