



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HITACHI 135LC HCMDAT60E00200673

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225489	JR0199313	---
Sample Date		Client Info		27 Jun 2024	20 Dec 2023	---
Machine Age	hrs	Client Info		1249	826	---
Oil Age	hrs	Client Info		0	826	---
Filter Age	hrs	Client Info		0	826	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	13	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	4	5	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	8	28	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	21	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Fuel	%	ASTM D3524	>5	<1.0	▲ 2.2	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	7.6	7.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	19.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	2	---
Boron	ppm	ASTM D5185m		216	186	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		218	● 39	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		784	● 126	---
Calcium	ppm	ASTM D5185m		1746	1852	---
Phosphorus	ppm	ASTM D5185m		1020	892	---
Zinc	ppm	ASTM D5185m		1257	1103	---
Sulfur	ppm	ASTM D5185m		3826	● 2619	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	12.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.5	7.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	▲ 11.5	---

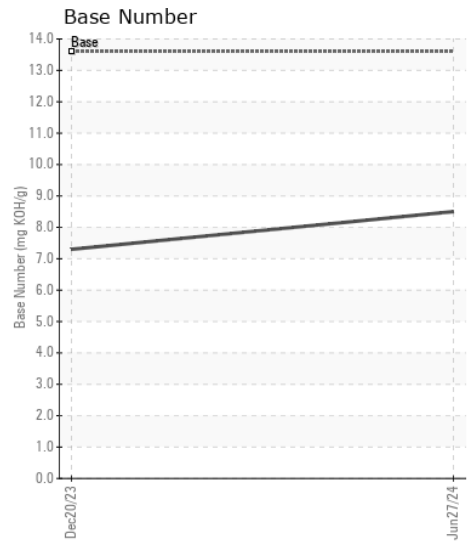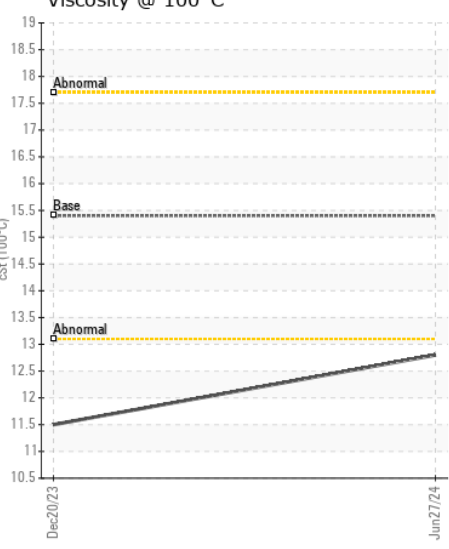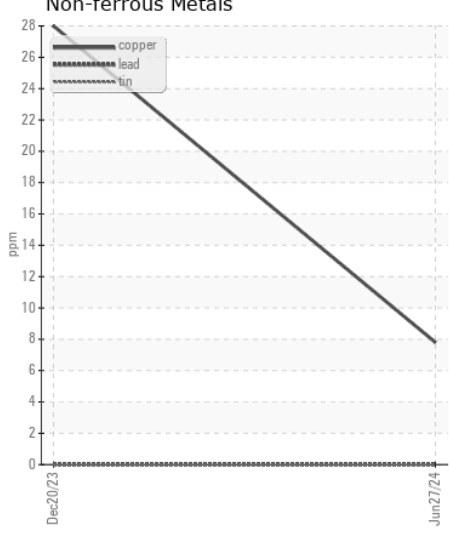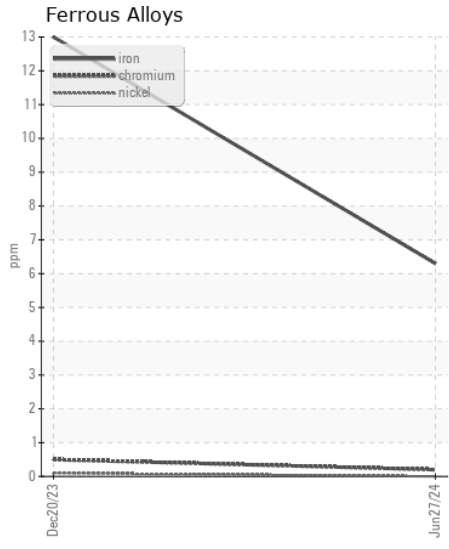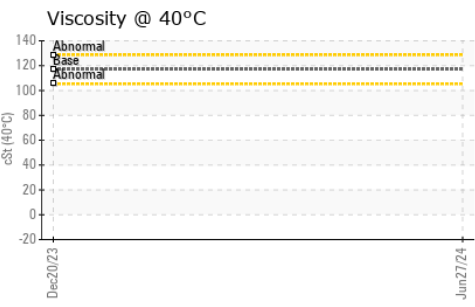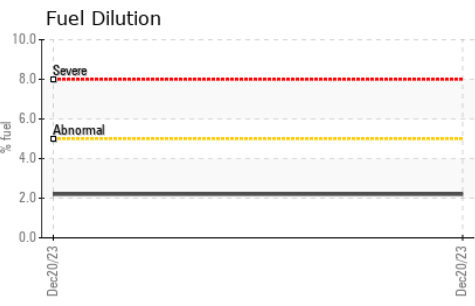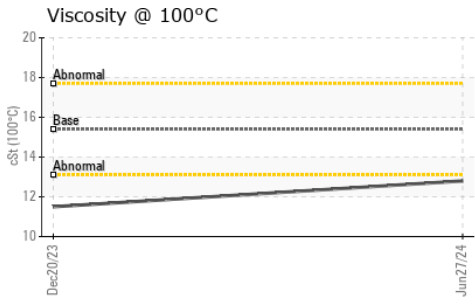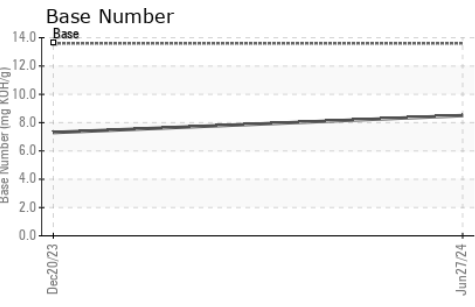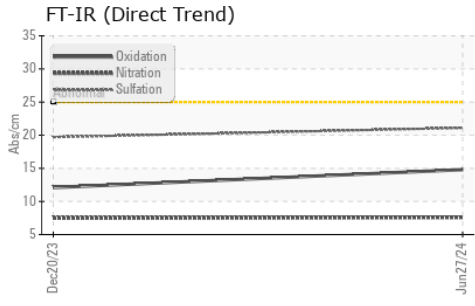

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225489 **Received** : 28 Jun 2024
Lab Number : 06223317 **Tested** : 01 Jul 2024
Unique Number : 11101514 **Diagnosed** : 01 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: FuelDilution, KV40, TBN)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111
 Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)