



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[MATTHEW JOHNSON LOGG]**  
 Machine Id  
**JOHN DEERE 748L-II DW748LB714062**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0222065</b>	JR0165195	JR0124668
Sample Date		Client Info		<b>24 Jun 2024</b>	17 Oct 2023	25 Oct 2022
Machine Age	hrs	Client Info		<b>3833</b>	2499	500
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>18</b>	14	8
Iron	ppm	ASTM D5185m	>20	<b>9</b>	3	1
Chromium	ppm	ASTM D5185m	>10	<b>4</b>	2	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>75	<b>2</b>	4	2
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>3666</b>	9375	443
Particles >6µm		ASTM D7647	>1300	<b>221</b>	587	115
Particles >14µm		ASTM D7647	>160	<b>29</b>	28	13
Particles >21µm		ASTM D7647	>40	<b>10</b>	7	3
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/15/12</b>	20/16/12	16/14/11
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	0
Boron	ppm	ASTM D5185m		<b>8</b>	0	0
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>5</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>25</b>	0	<1
Calcium	ppm	ASTM D5185m	87	<b>135</b>	112	93
Phosphorus	ppm	ASTM D5185m	727	<b>467</b>	630	640
Zinc	ppm	ASTM D5185m	900	<b>665</b>	805	854
Sulfur	ppm	ASTM D5185m	1500	<b>1565</b>	1710	1989
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.62</b>	0.67	0.75
Visc @ 40°C	cSt	ASTM D445	65	<b>53.1</b>	52.4	58.0

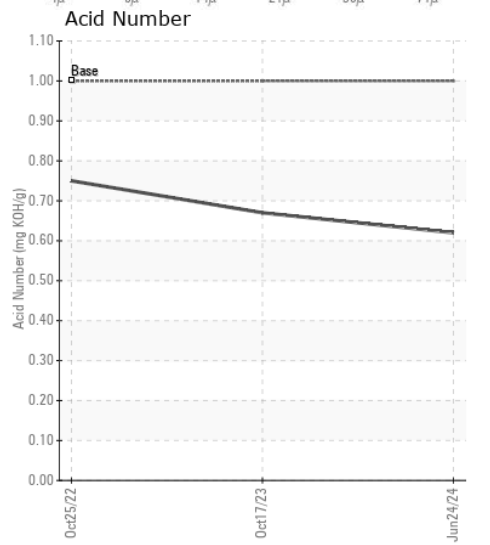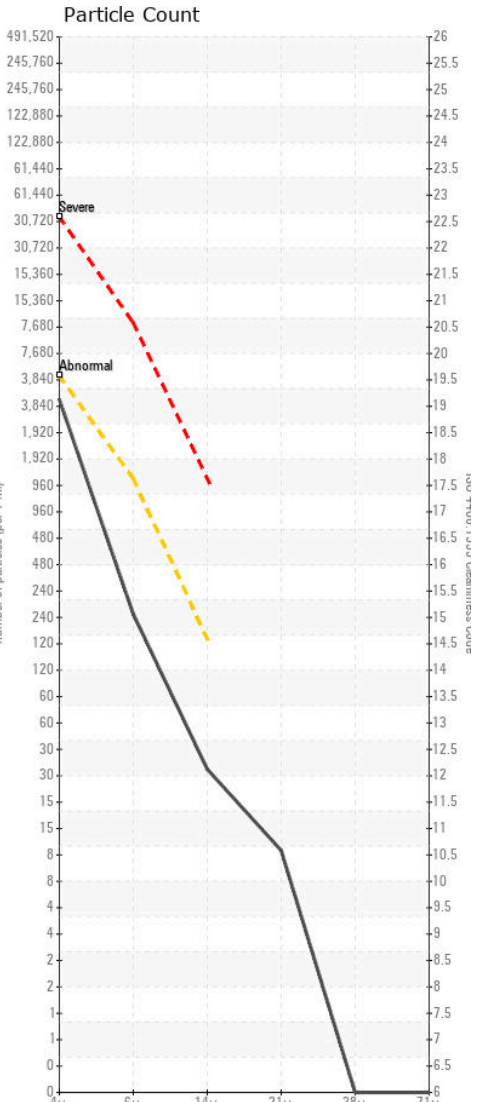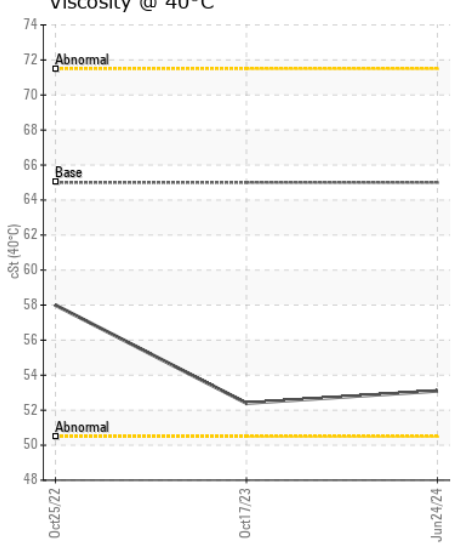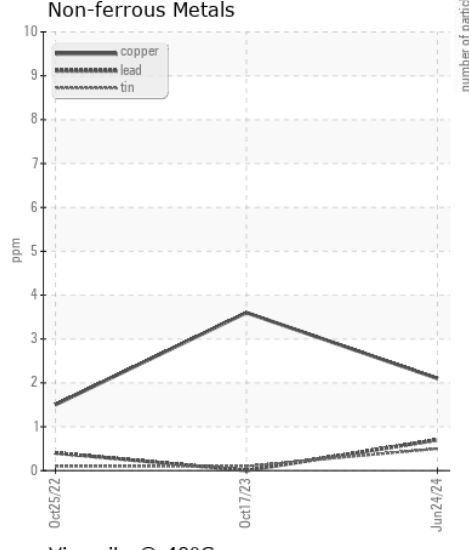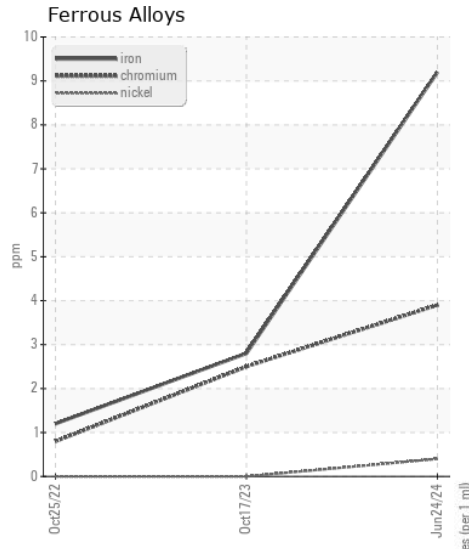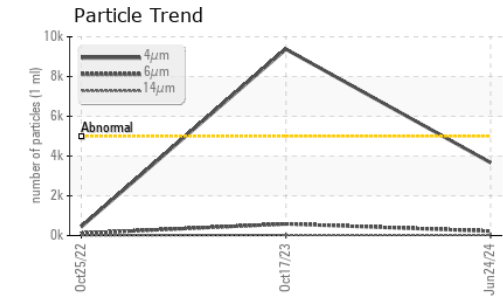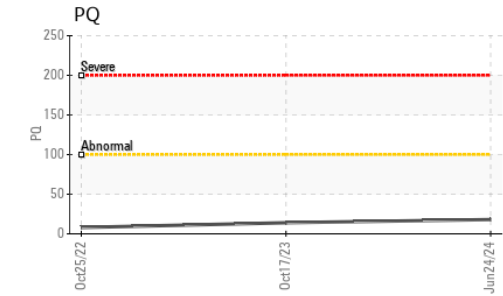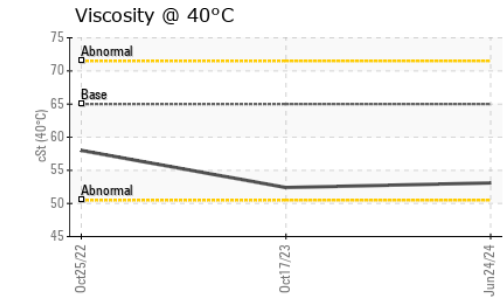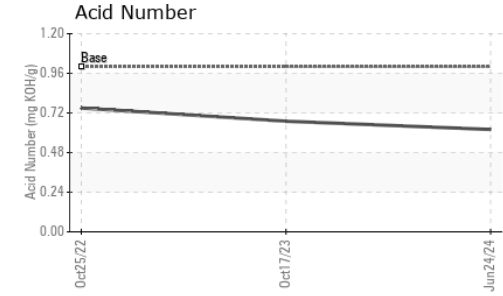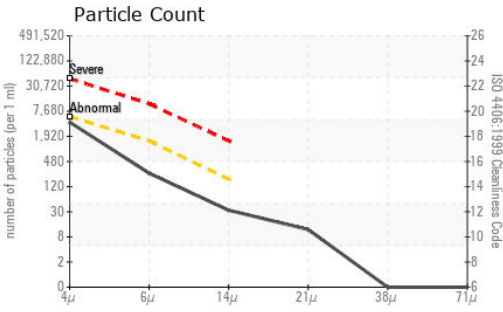

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0222065 **Received** : 28 Jun 2024  
**Lab Number** : 06223408 **Tested** : 01 Jul 2024  
**Unique Number** : 11101605 **Diagnosed** : 01 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (919)614-2260

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (919)779-5432