



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 210G 1FF210GXHMF529661
Component
Pump Drive
Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222542	JR0202740	JR0190866
Sample Date		Client Info		25 Jun 2024	27 Feb 2024	29 Oct 2023
Machine Age	hrs	Client Info		3002	2500	2058
Oil Age	hrs	Client Info		2560	442	2058
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		55	116	26
Iron	ppm	ASTM D5185m	>151	195	205	276
Chromium	ppm	ASTM D5185m	>11	2	2	5
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	2
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	3	2	19
Lead	ppm	ASTM D5185m	>51	0	0	0
Copper	ppm	ASTM D5185m	>51	1	0	1
Tin	ppm	ASTM D5185m	>4	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	21	18	82
Potassium	ppm	ASTM D5185m	>20	5	<1	6
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	4	0	4
Boron	ppm	ASTM D5185m		7	5	42
Barium	ppm	ASTM D5185m		0	0	5
Molybdenum	ppm	ASTM D5185m		7	7	88
Manganese	ppm	ASTM D5185m		3	2	5
Magnesium	ppm	ASTM D5185m		6	0	18
Calcium	ppm	ASTM D5185m		299	293	3308
Phosphorus	ppm	ASTM D5185m		550	560	1355
Zinc	ppm	ASTM D5185m		116	110	1150
Sulfur	ppm	ASTM D5185m		11025	13869	11189
Visc @ 40°C	cSt	ASTM D445		133	124	81.8

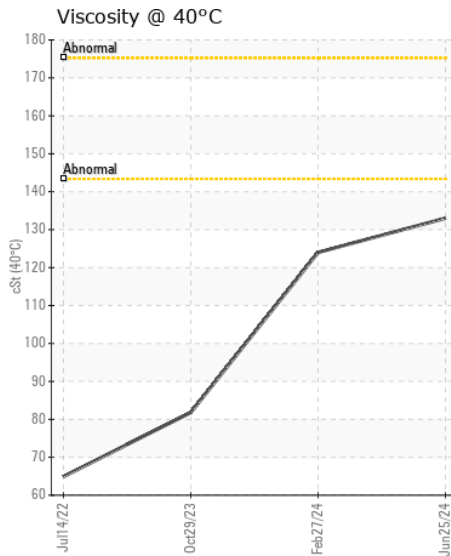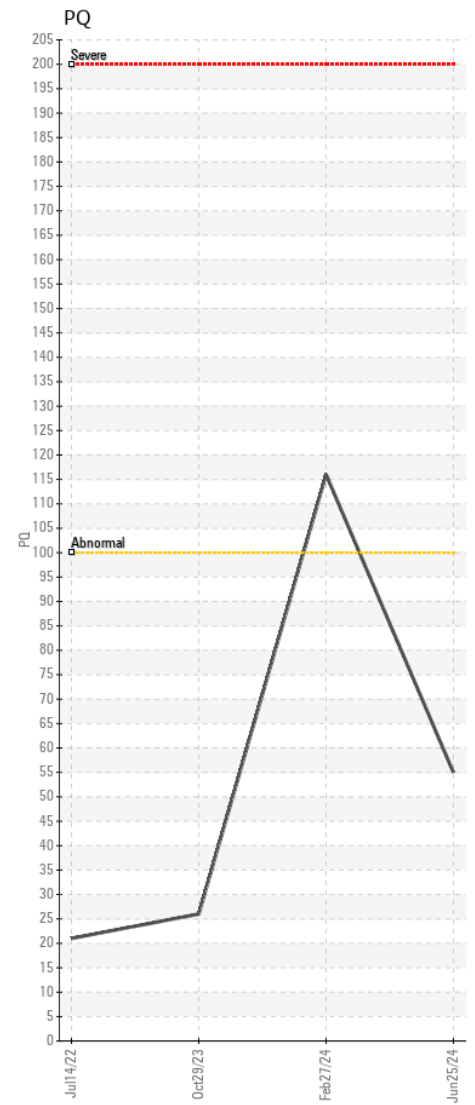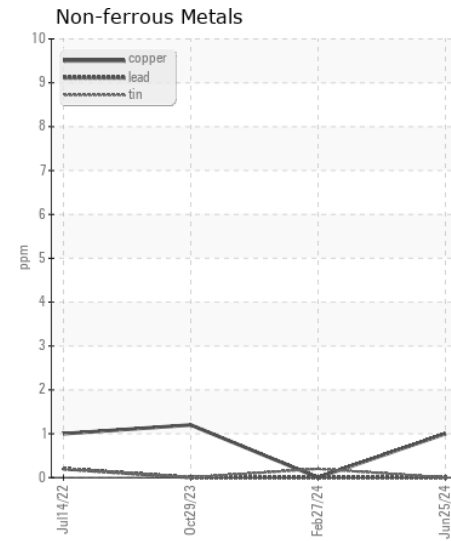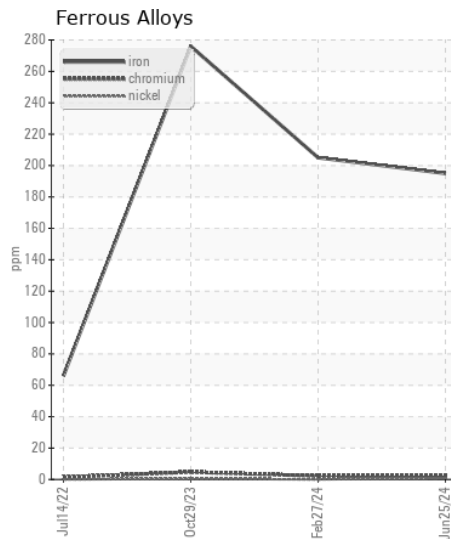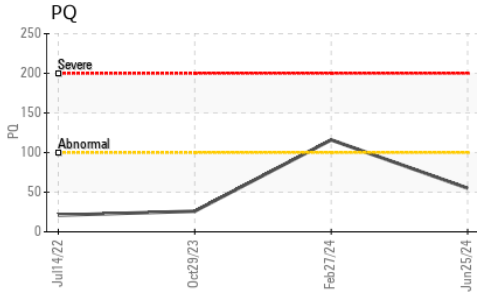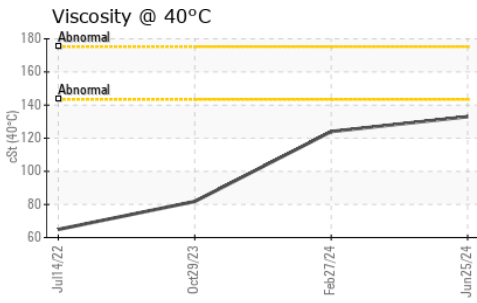

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222542 **Received** : 28 Jun 2024
Lab Number : 06223713 **Tested** : 01 Jul 2024
Unique Number : 11101910 **Diagnosed** : 01 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432