



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**208**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON UHP 10W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DE0000483</b>	---	---
Sample Date		Client Info		<b>24 May 2024</b>	---	---
Machine Age	mls	Client Info		<b>49994</b>	---	---
Oil Age	mls	Client Info		<b>10000</b>	---	---
Filter Age	mls	Client Info		<b>10000</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>20</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>8</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>17</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>13</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.7</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	2	<b>3</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	60	<b>66</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	1010	<b>1040</b>	---	---
Calcium	ppm	ASTM D5185m	1070	<b>1158</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1170</b>	---	---
Zinc	ppm	ASTM D5185m	1270	<b>1353</b>	---	---
Sulfur	ppm	ASTM D5185m	2060	<b>2961</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.2</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.1</b>	---	---
Visc @ 100°C	cSt	ASTM D445	15.52	<b>12.7</b>	---	---

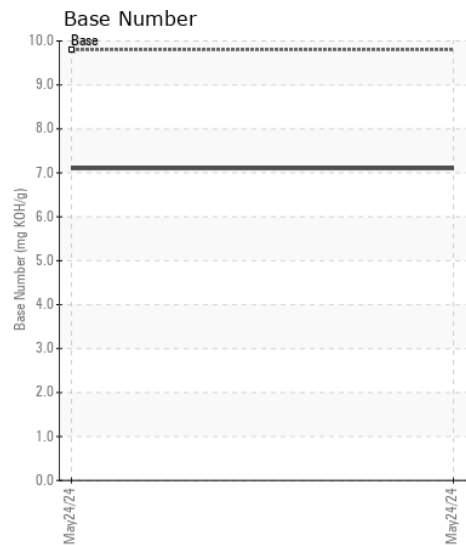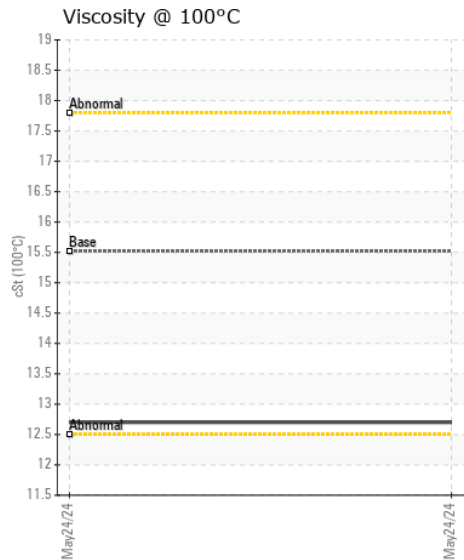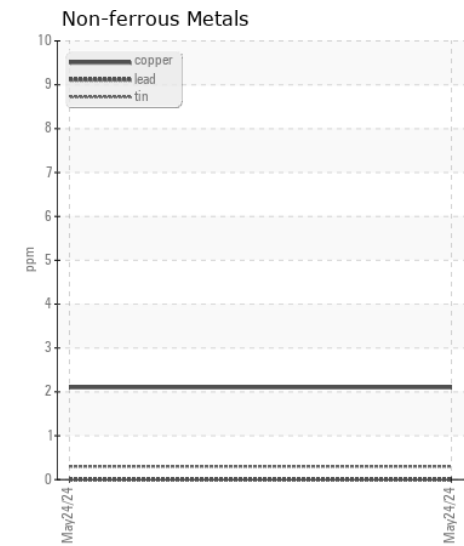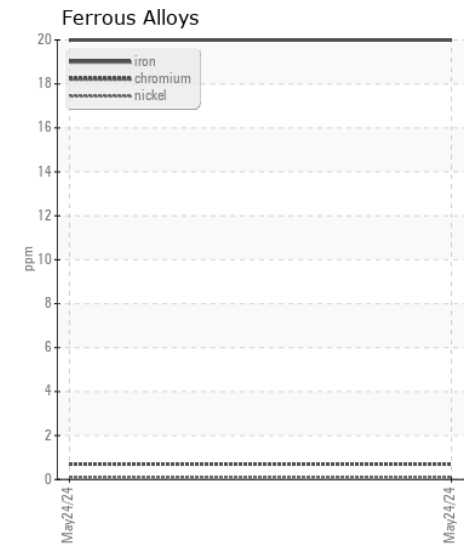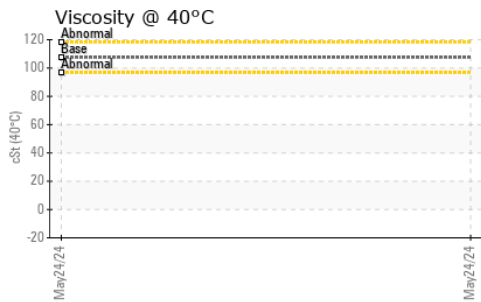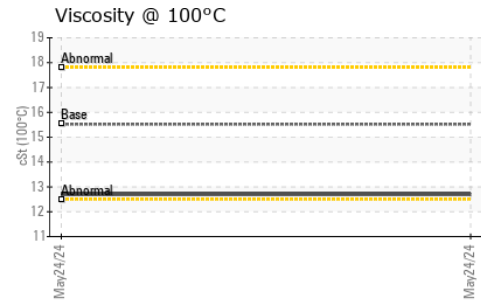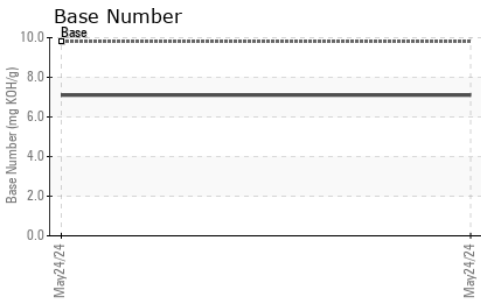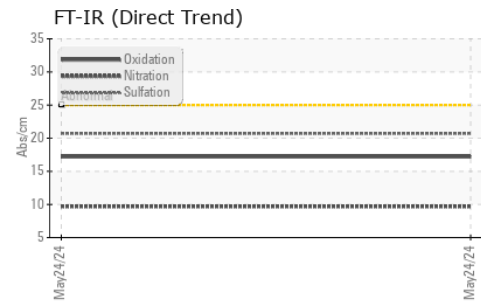

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DE0000483 **Received** : 28 Jun 2024  
**Lab Number** : 06224185 **Tested** : 01 Jul 2024  
**Unique Number** : 11102382 **Diagnosed** : 01 Jul 2024 - Angela Borella  
**Test Package** : FLEET ( Additional Tests: KV40 )

**Iroquois Bar Corp.**  
 155 Commerce Drive  
 Lacakwana, NY  
 US 14218  
 Contact: Denver Persinger  
 dpersinger@iroquoisbar.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)