

Machine Id
PETERBILT 2002 PETE 379 - MARVIN GARRETSON
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LF0001508	---	---
Sample Date		Client Info		27 Jun 2024	---	---
Machine Age	mls	Client Info		84056	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	75	---	---
Chromium	ppm	ASTM D5185m	>4	4	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>25	5	---	---
Lead	ppm	ASTM D5185m	>45	7	---	---
Copper	ppm	ASTM D5185m	>85	11	---	---
Tin	ppm	ASTM D5185m	>4	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	8	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	2	---	---
Boron	ppm	ASTM D5185m		32	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		39	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		619	---	---
Calcium	ppm	ASTM D5185m		2000	---	---
Phosphorus	ppm	ASTM D5185m		979	---	---
Zinc	ppm	ASTM D5185m		1265	---	---
Sulfur	ppm	ASTM D5185m		3715	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	27.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.0	---	---
Visc @ 100°C	cSt	ASTM D445		13.8	---	---

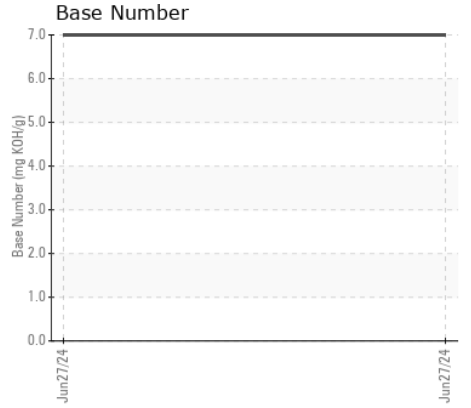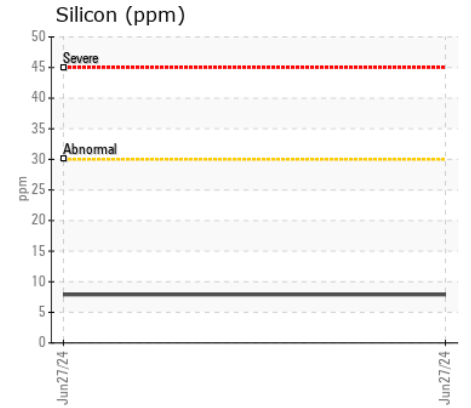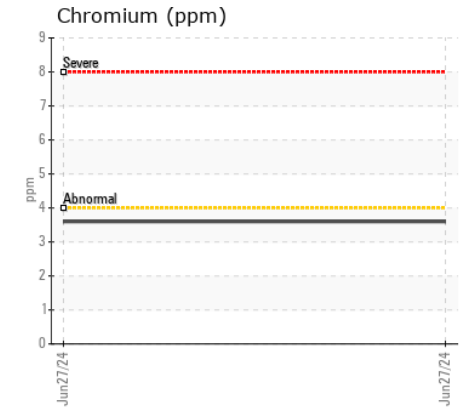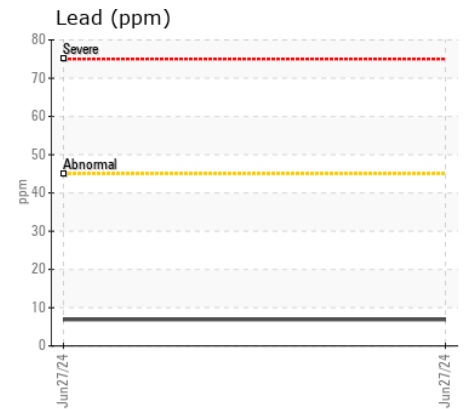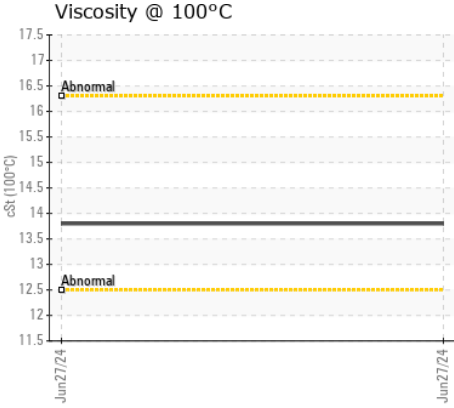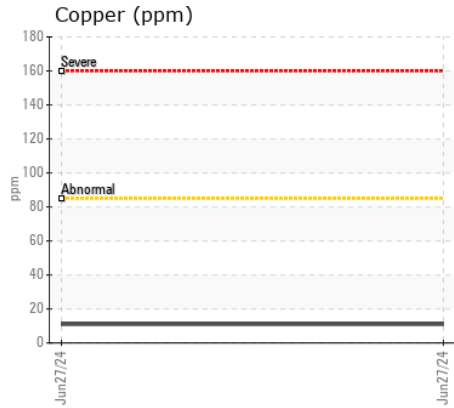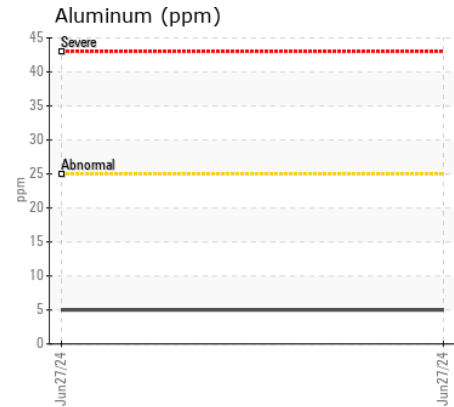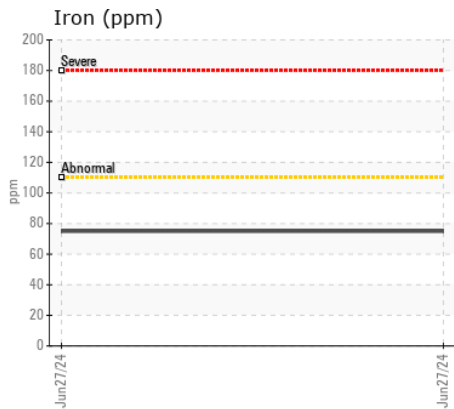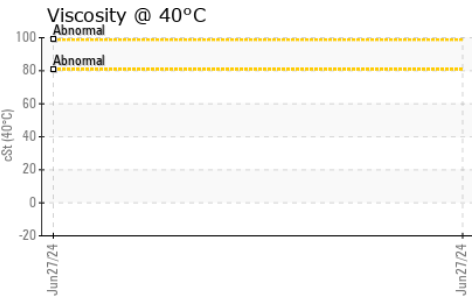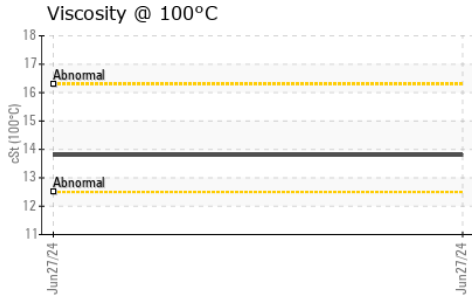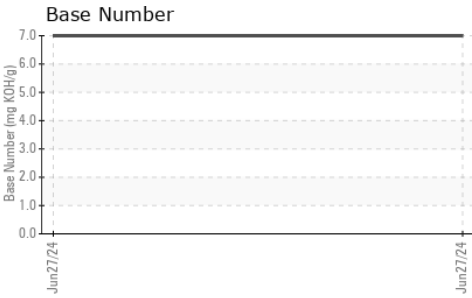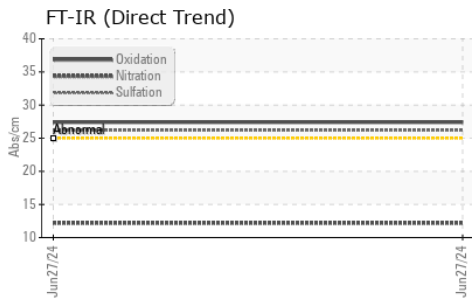

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LF0001508 **Received** : 01 Jul 2024
Lab Number : 06224289 **Tested** : 02 Jul 2024
Unique Number : 11102486 **Diagnosed** : 02 Jul 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: KV40, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

RANDY'S TRUCK REPAIR
 24536 STAR ROAD
 TAMPICO, IL
 US 61283

Contact: RANDY ETHERIDGE
 rantr@thewisp.net
 T: (815)438-2195
 F: (815)438-2015