



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**MARTHA DENTON**  
Machine Id  
**[MARTHA DENTON] 004 565395-4**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON MEROPA 320 (135 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0067804</b>	MW0067808	MW0067814
Sample Date		Client Info		<b>01 Jun 2024</b>	01 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		<b>75357</b>	74845	24113
Oil Age	hrs	Client Info		<b>0</b>	24000	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Filter Changed		Client Info		<b>N/A</b>	None	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>53</b>	54	58
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>7</b>	8	7
Lead	ppm	ASTM D5185m	>100	<b>9</b>	13	12
Copper	ppm	ASTM D5185m	>50	<b>6</b>	7	6
Tin	ppm	ASTM D5185m	>10	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>8</b>	7	6
Boron	ppm	ASTM D5185m	20	<b>6</b>	7	8
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185m	0	<b>7</b>	9	8
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	2	3
Calcium	ppm	ASTM D5185m	25	<b>25</b>	31	31
Phosphorus	ppm	ASTM D5185m	235	<b>297</b>	313	323
Zinc	ppm	ASTM D5185m		<b>10</b>	14	13
Sulfur	ppm	ASTM D5185m		<b>6182</b>	5710	5650
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.94</b>	0.69	0.64
Visc @ 40°C	cSt	ASTM D445	304	<b>323</b>	324	324

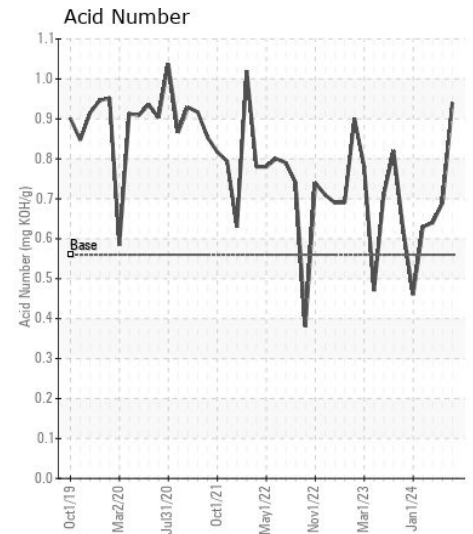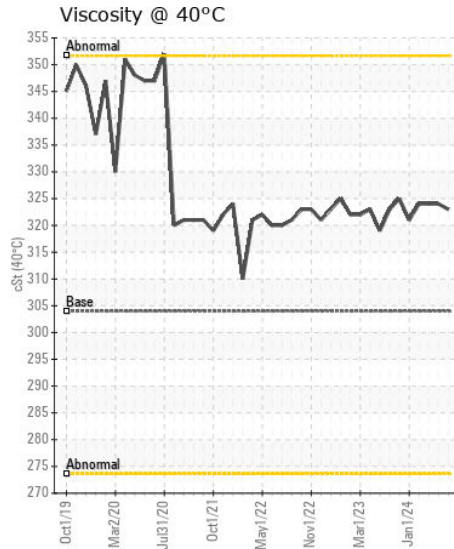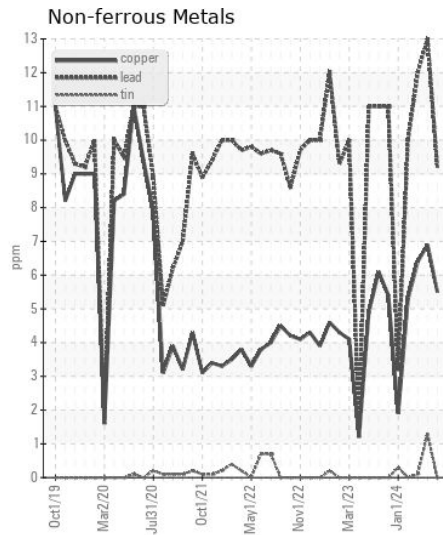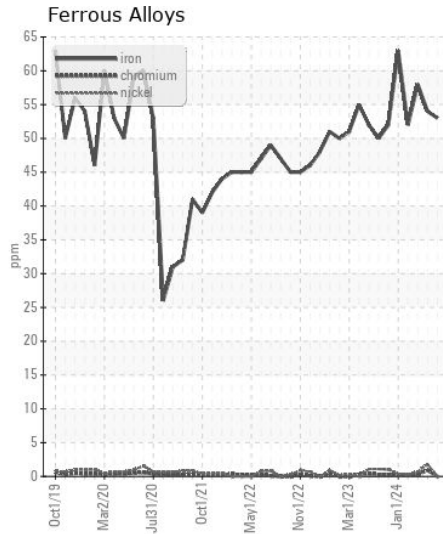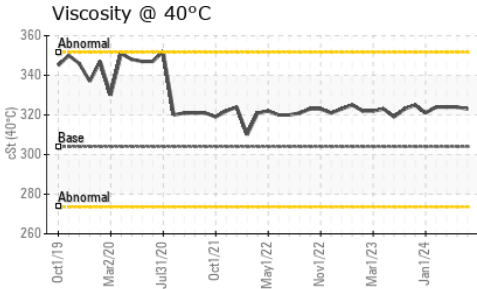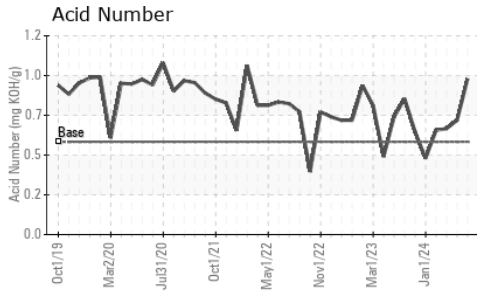

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0067804

**Lab Number** : 06225293

**Unique Number** : 11103490

**Test Package** : MAR 2

**Received** : 01 Jul 2024

**Tested** : 02 Jul 2024

**Diagnosed** : 02 Jul 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)