



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
RO 91204
Component
Front Gasoline Engine
Fluid
GASOLINE ENGINE OIL SAE 5W20 (7 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0824080	---	---
Sample Date		Client Info		07 Jun 2024	---	---
Machine Age	mls	Client Info		4675	---	---
Oil Age	mls	Client Info		5000	---	---
Filter Age	mls	Client Info		5000	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	6	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	2	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>155	3	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	12	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	35	---	---
Boron	ppm	ASTM D5185m	75	134	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	100	30	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	12	318	---	---
Calcium	ppm	ASTM D5185m	2100	1193	---	---
Phosphorus	ppm	ASTM D5185m	650	634	---	---
Zinc	ppm	ASTM D5185m	850	742	---	---
Sulfur	ppm	ASTM D5185m	2500	3044	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.7	---	---
Visc @ 100°C	cSt	ASTM D445	7.5	8.3	---	---

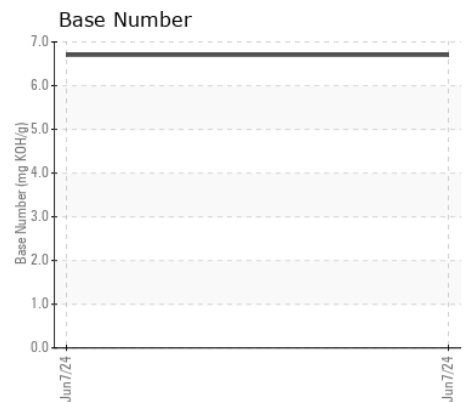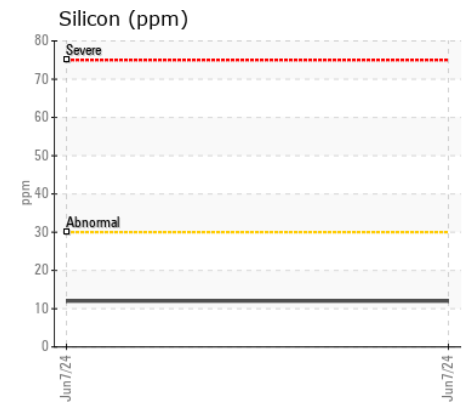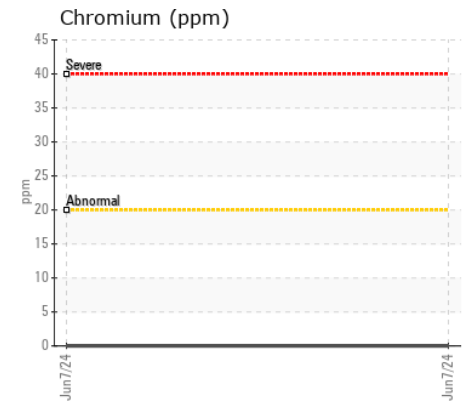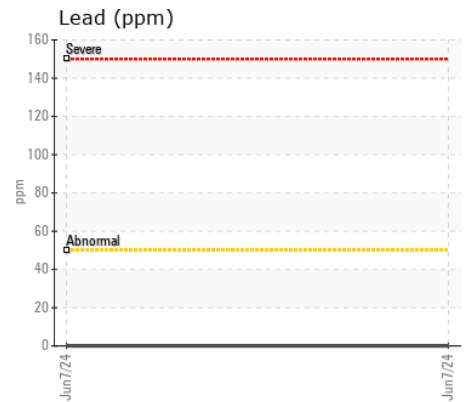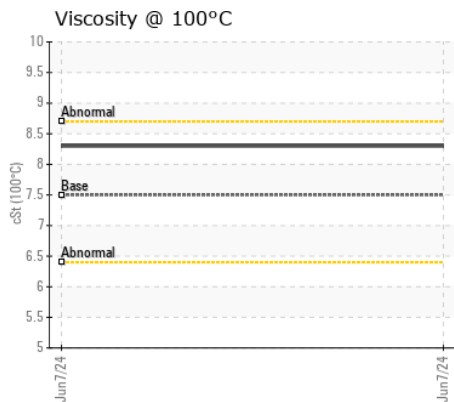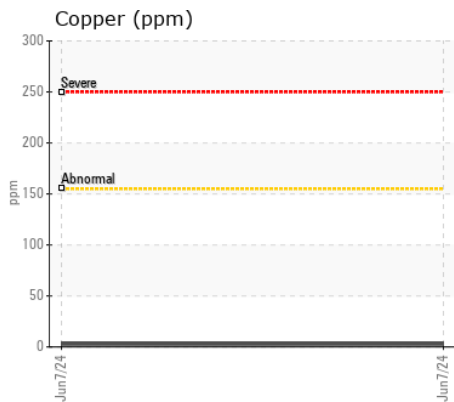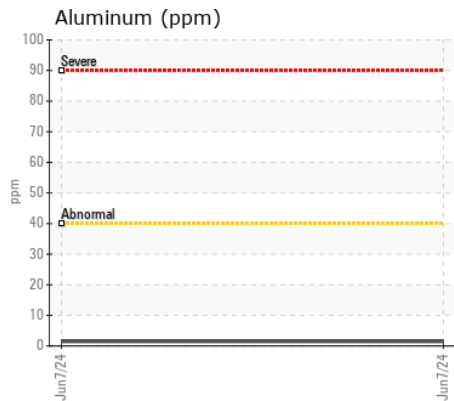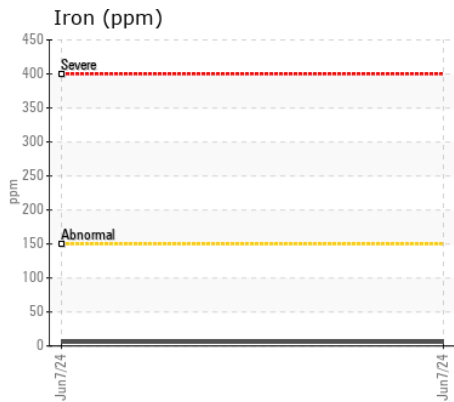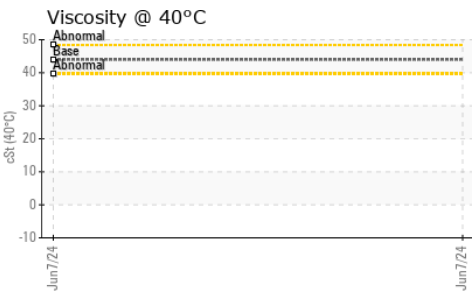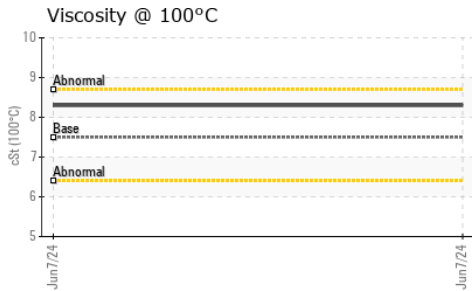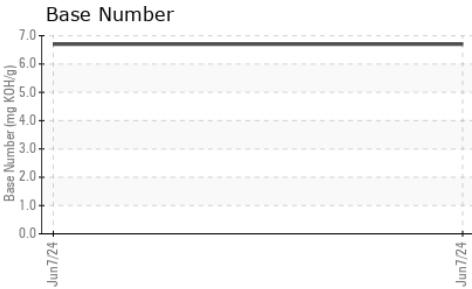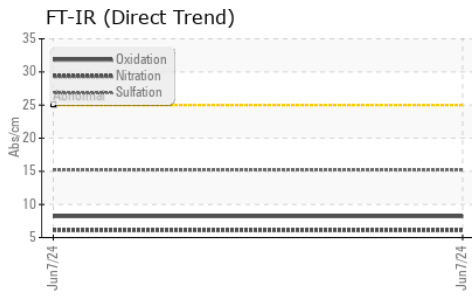

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0824080 **Received** : 01 Jul 2024
Lab Number : 06225470 **Tested** : 03 Jul 2024
Unique Number : 11103667 **Diagnosed** : 03 Jul 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: KV40, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ATEL BUS & TRUCK
 12120 CONWAY RD
 BELTSVILLE, MD
 US 20705

Contact: BRIAN CONNOLLY
 bconnolly@atelbus.com

T: (301)210-5100

F: (301)210-5102