



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(16085Z) Walgreens - Tractor

Machine Id

[Walgreens - Tractor] 136A61262

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0127879	PCA0117875	PCA0105420
Sample Date		Client Info		17 Jun 2024	12 Feb 2024	24 Oct 2023
Machine Age	mls	Client Info		377818	359492	297757
Oil Age	mls	Client Info		25000	25000	25000
Filter Age	mls	Client Info		25000	25000	25000
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	9	16	6
Chromium	ppm	ASTM D5185m	>5	2	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	4	6	3
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>150	1	4	3
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	6	4
Potassium	ppm	ASTM D5185m	>20	3	6	5
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.9	9.1	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	21.3	19.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	<1	0
Boron	ppm	ASTM D5185m	2	3	3	3
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	58	64	62
Manganese	ppm	ASTM D5185m	0	<1	<1	0
Magnesium	ppm	ASTM D5185m	950	987	1031	932
Calcium	ppm	ASTM D5185m	1050	1067	1152	1091
Phosphorus	ppm	ASTM D5185m	995	1096	1063	989
Zinc	ppm	ASTM D5185m	1180	1264	1327	1249
Sulfur	ppm	ASTM D5185m	2600	3619	3331	3128
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	17.3	14.8
Base Number (BN)	mg KOH/g	ASTM D2896		8.6	6.1	8.4
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.5	11.5

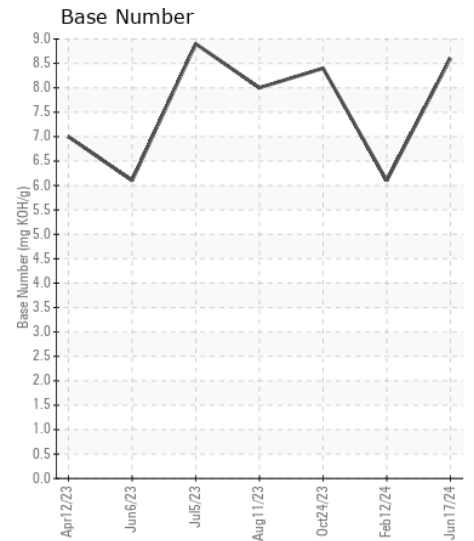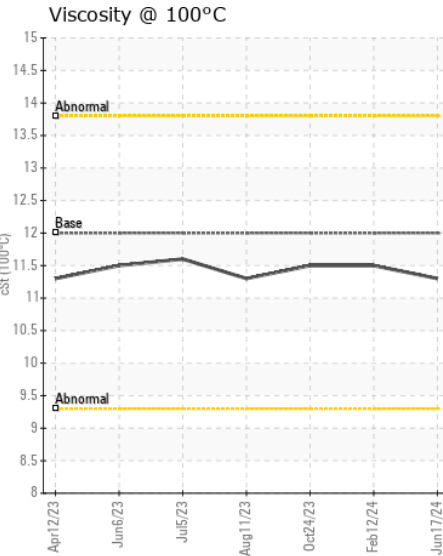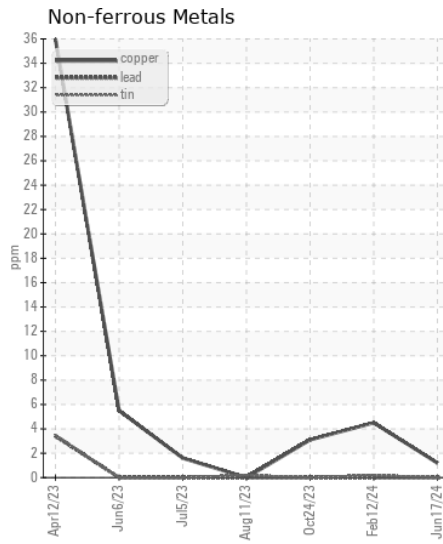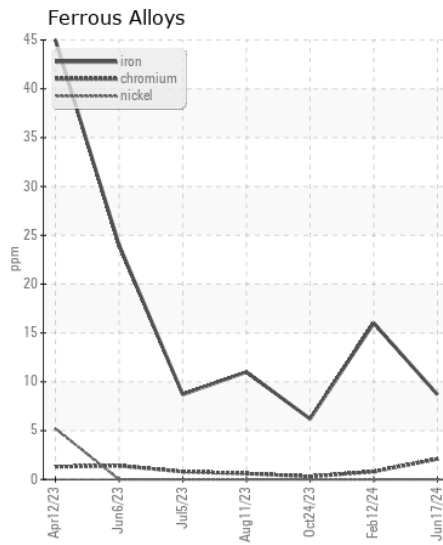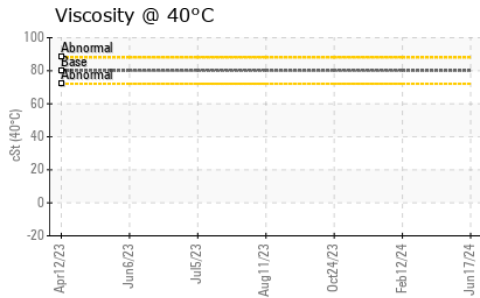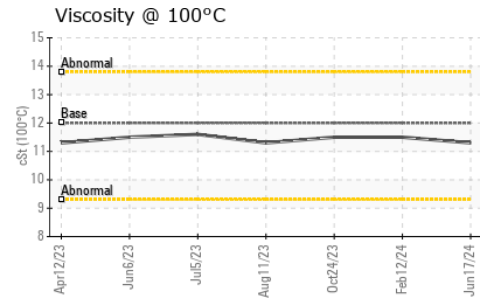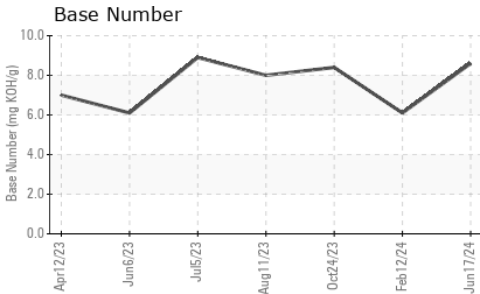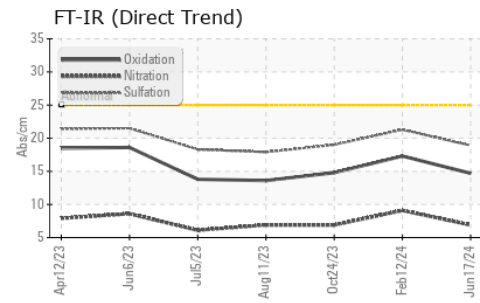

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0127879 **Received** : 02 Jul 2024
Lab Number : 06226884 **Tested** : 05 Jul 2024
Unique Number : 11110377 **Diagnosed** : 05 Jul 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: KV40)

Transervice - Shop 1365 - Berkeley-Nazareth
 6813 Chrisphalt Drive
 Bath Borough, PA
 US 18014
 Contact: Stephen Mackes
 smackes@transervice.com
 T: (610)837-8103
 F: (610)837-8105

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)