



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 460P 1DW460PACRFB08088**  
 Component  
**Rear Differential**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0007912</b>	WE0006891	---
Sample Date		Client Info		<b>01 Jul 2024</b>	09 Apr 2024	---
Machine Age	hrs	Client Info		<b>966</b>	425	---
Oil Age	hrs	Client Info		<b>966</b>	425	---
Filter Age	hrs	Client Info		<b>966</b>	425	---
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Filter Changed		Client Info		<b>Not Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>20</b>	34	---
Iron	ppm	ASTM D5185m	>500	<b>18</b>	23	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	7	---
Copper	ppm	ASTM D5185m	>100	<b>7</b>	11	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>3</b>	5	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	3	---
Boron	ppm	ASTM D5185m	6	<b>3</b>	<1	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	4	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	2	---
Manganese	ppm	ASTM D5185m		<b>2</b>	2	---
Magnesium	ppm	ASTM D5185m	145	<b>106</b>	100	---
Calcium	ppm	ASTM D5185m	3570	<b>3602</b>	3643	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1099</b>	1178	---
Zinc	ppm	ASTM D5185m	1640	<b>1317</b>	1245	---
Sulfur	ppm	ASTM D5185m		<b>4411</b>	4091	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>50.7</b>	51.1	---

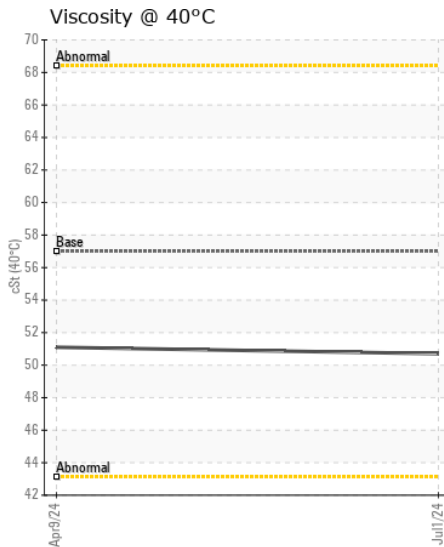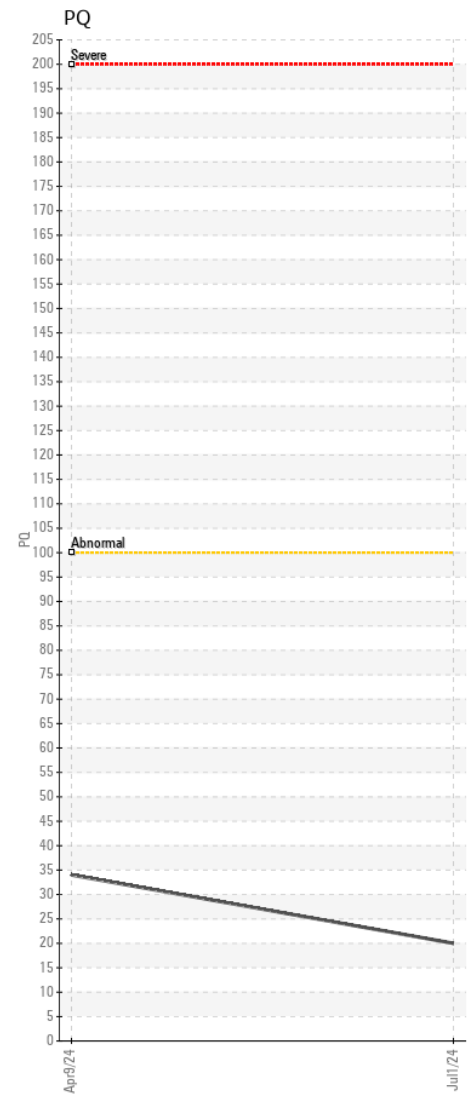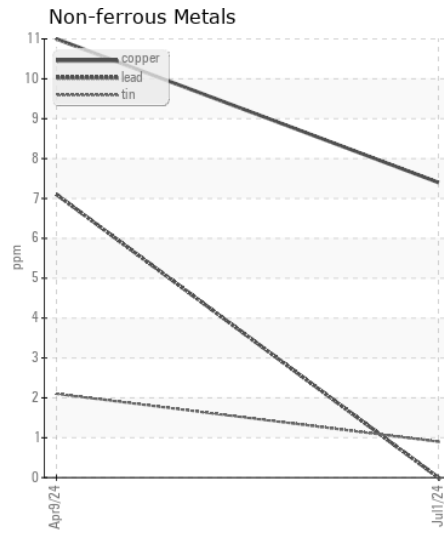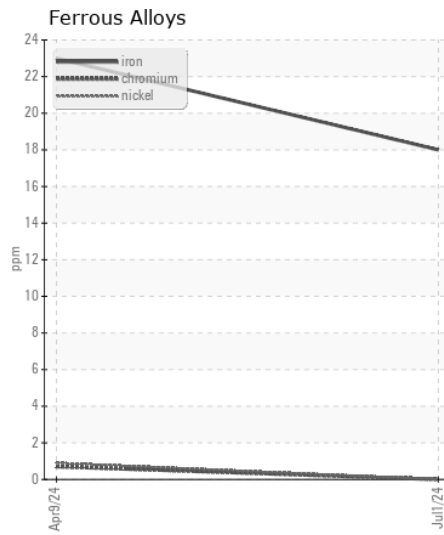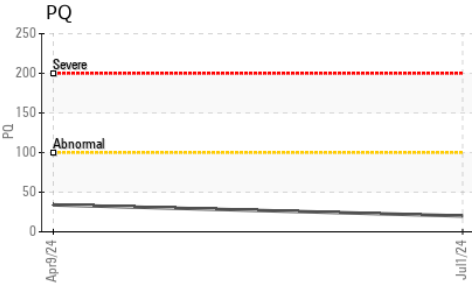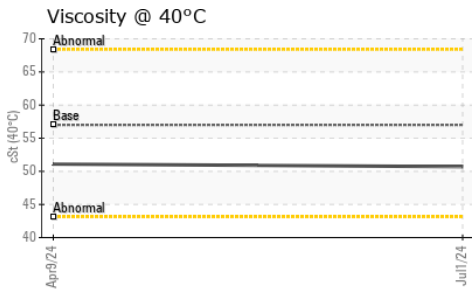

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : WE0007912

**Lab Number** : 06227809

**Unique Number** : 11111302

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 03 Jul 2024

**Tested** : 05 Jul 2024

**Diagnosed** : 05 Jul 2024 - Wes Davis

**WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT**

P.O. BOX 412

NORTHPORT, AL

US 35476

Contact: SCOTT GOOD

sgood@warriortractor.com

T: (205)339-0300

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)