



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

Ascendum Machinery

Machine Id

VOLVO EC220E 316270

Component

Diesel Engine

Fluid

VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0008476	---	---
Sample Date		Client Info		02 Jul 2024	---	---
Machine Age	hrs	Client Info		568	---	---
Oil Age	hrs	Client Info		568	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	14	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	4	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>15	5	---	---
Tin	ppm	ASTM D5185m	>10	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	13	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		9	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		17	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		144	---	---
Calcium	ppm	ASTM D5185m		2271	---	---
Phosphorus	ppm	ASTM D5185m		991	---	---
Zinc	ppm	ASTM D5185m		1169	---	---
Sulfur	ppm	ASTM D5185m		4198	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.5	---	---
Visc @ 100°C	cSt	ASTM D445		13.9	---	---

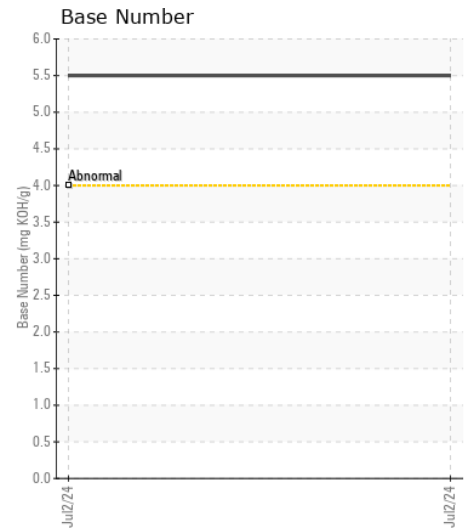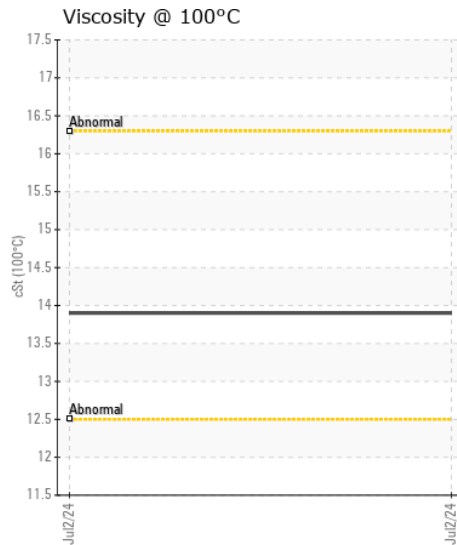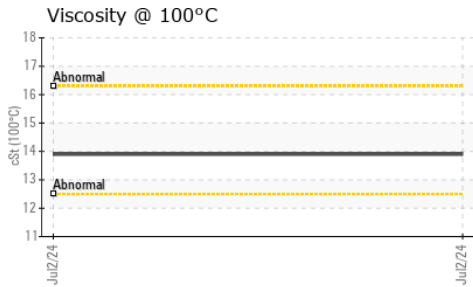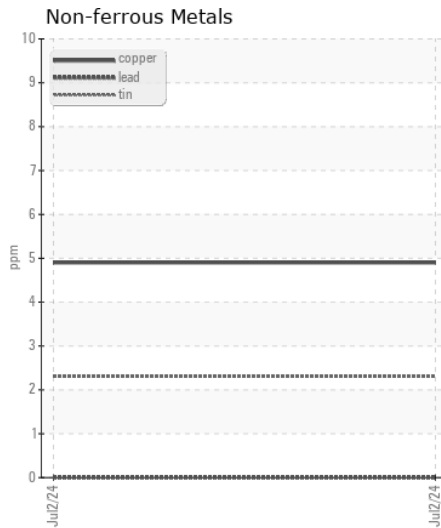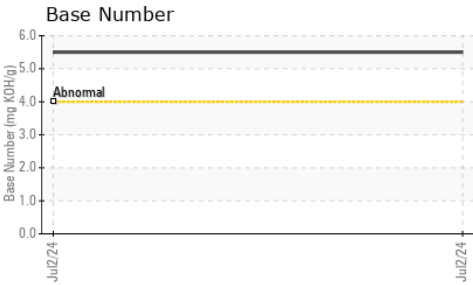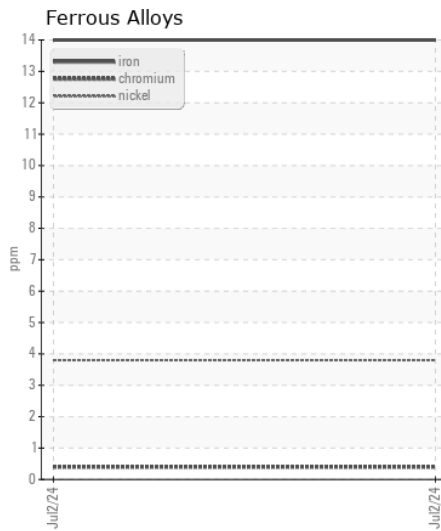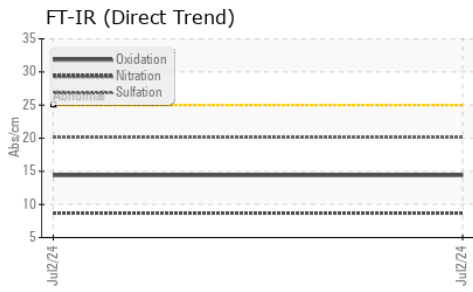

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0008476

Lab Number : 06228229

Unique Number : 11111722

Test Package : CONST (Additional Tests: TBN)

Received : 05 Jul 2024

Tested : 05 Jul 2024

Diagnosed : 08 Jul 2024 - Don Baldrige

CHURCHILL CONTRACTING LLC

4101 STUART ANDREW BLVD SUITE A

CHARLOTTE, NC

US 28097

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: