



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 210P 1FF210PACPF001127
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (21 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225986	JR0208755	---
Sample Date		Client Info		03 Jul 2024	24 Mar 2024	---
Machine Age	hrs	Client Info		965	489	---
Oil Age	hrs	Client Info		476	489	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	21	44	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	2	4	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	7	---
Lead	ppm	ASTM D5185m	>26	0	2	---
Copper	ppm	ASTM D5185m	>26	55	▲ 394	---
Tin	ppm	ASTM D5185m	>4	1	3	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	7	11	---
Potassium	ppm	ASTM D5185m	>20	2	4	---
Fuel		WC Method	>2.1	<1.0	0.3	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	9.4	9.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	24.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	4	7	---
Boron	ppm	ASTM D5185m		141	199	---
Barium	ppm	ASTM D5185m		0	1	---
Molybdenum	ppm	ASTM D5185m		215	232	---
Manganese	ppm	ASTM D5185m		1	5	---
Magnesium	ppm	ASTM D5185m		843	822	---
Calcium	ppm	ASTM D5185m		1513	1499	---
Phosphorus	ppm	ASTM D5185m		935	922	---
Zinc	ppm	ASTM D5185m		1167	1129	---
Sulfur	ppm	ASTM D5185m		3206	3149	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.5	20.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.7	8.7	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	11.2	---


FT-IR (Direct Trend)

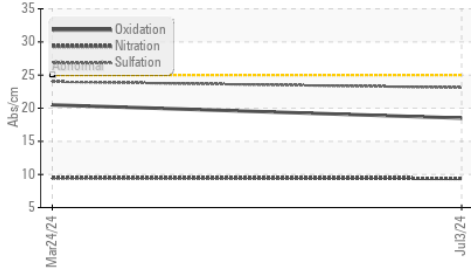


Ferrous Alloys

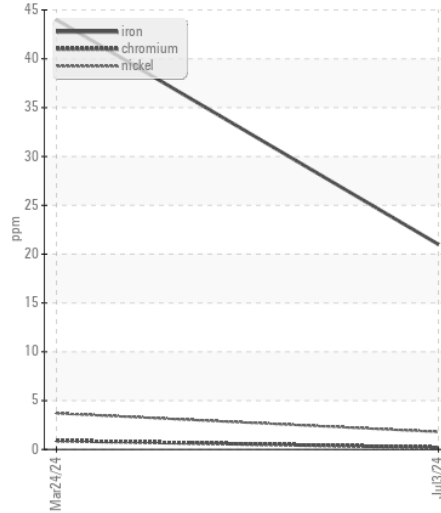


Base Number

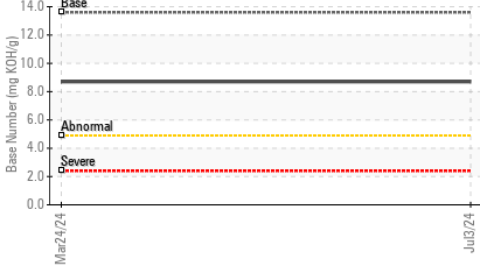


Non-ferrous Metals

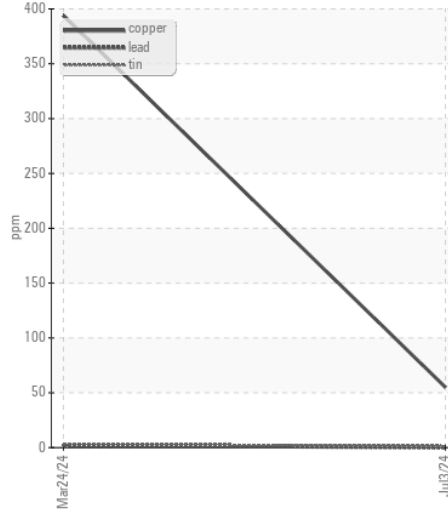


Viscosity @ 100°C

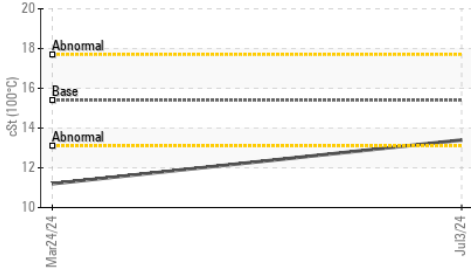

Viscosity @ 100°C

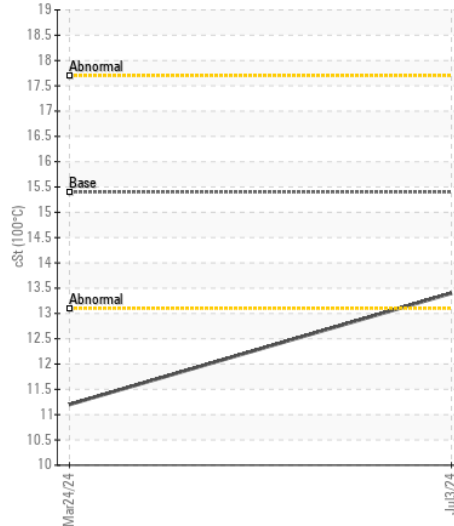

Base Number

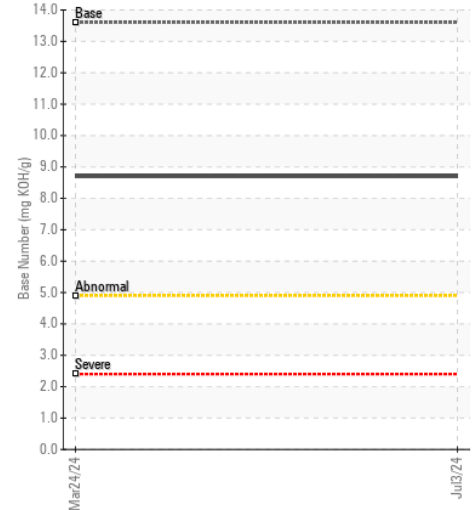

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0225986

Lab Number : 06228247

Unique Number : 11111740

Test Package : CONST (Additional Tests: TBN)

Received : 05 Jul 2024

Tested : 05 Jul 2024

Diagnosed : 05 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENVILLE

3604 HIGHWAY 264 E

GREENVILLE, NC

US 27834-5800

Contact: GREENVILLE SHOP

christopher.martin@jamesriverequipment.com

T:

F: