



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(EIB893)
Machine Id
3641
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0077470	GFL0089586	GFL0089600
Sample Date		Client Info		26 Jun 2024	20 Mar 2024	27 Feb 2024
Machine Age	hrs	Client Info		1484	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>75	16	52	111
Chromium	ppm	ASTM D5185m	>5	<1	5	2
Nickel	ppm	ASTM D5185m	>4	<1	1	4
Titanium	ppm	ASTM D5185m	>2	<1	2	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>15	7	41	8
Lead	ppm	ASTM D5185m	>25	0	1	3
Copper	ppm	ASTM D5185m	>100	0	9	5
Tin	ppm	ASTM D5185m	>4	<1	1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	23	11
Potassium	ppm	ASTM D5185m	>20	3	23	6
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.7	0.9	1
Nitration	Abs/cm	*ASTM D7624	>20	7.0	11.0	13.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	22.7	27.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	4	10
Boron	ppm	ASTM D5185m	0	2	2	8
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	60	51	62	94
Manganese	ppm	ASTM D5185m	0	<1	1	<1
Magnesium	ppm	ASTM D5185m	1010	917	905	1109
Calcium	ppm	ASTM D5185m	1070	946	1103	1343
Phosphorus	ppm	ASTM D5185m	1150	985	1072	1188
Zinc	ppm	ASTM D5185m	1270	1192	1205	1385
Sulfur	ppm	ASTM D5185m	2060	3363	2628	2760
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.8	18.9	28.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.2	5.8	6.5
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	13.3	15.4

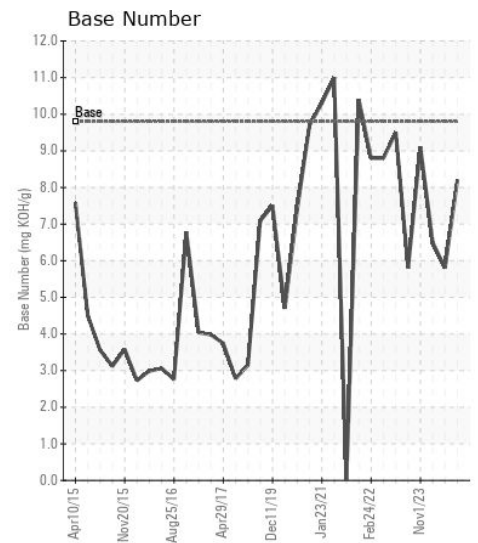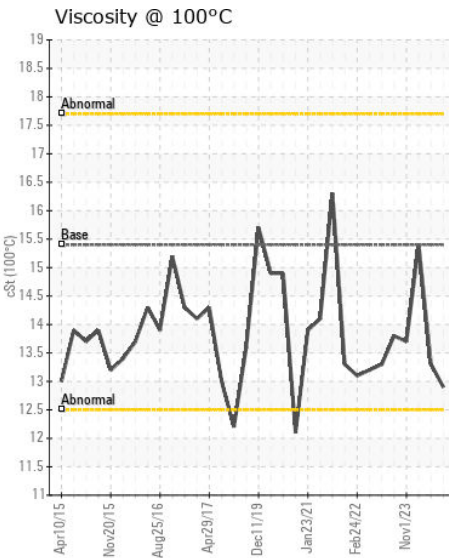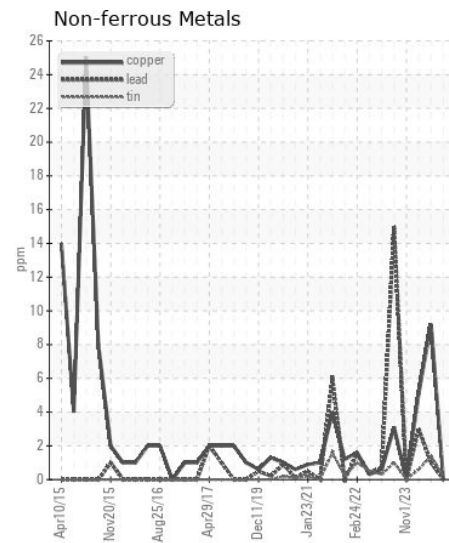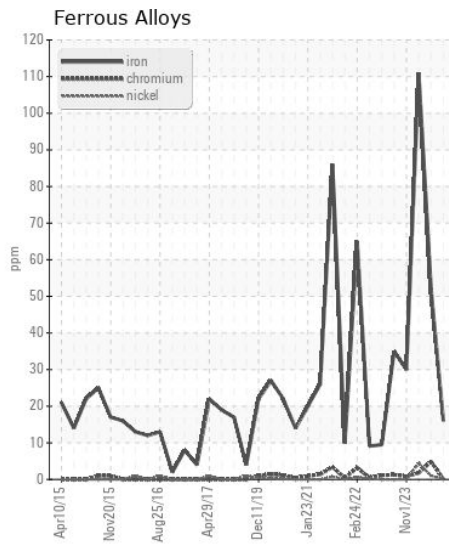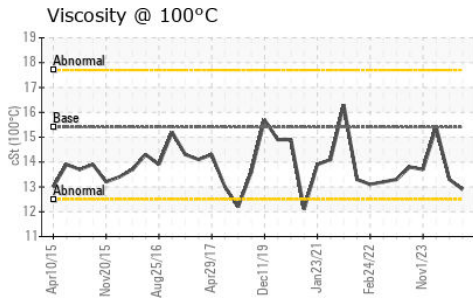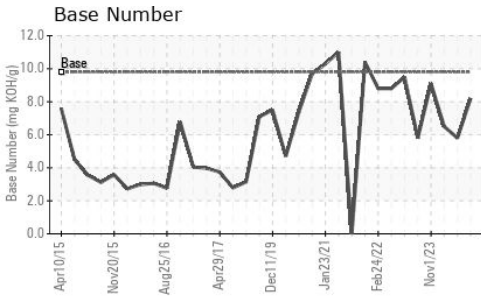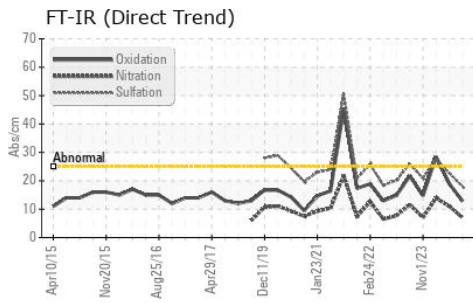

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0077470
Lab Number : 06228282
Unique Number : 11111775
Test Package : FLEET

Received : 05 Jul 2024
Tested : 05 Jul 2024
Diagnosed : 05 Jul 2024 - Wes Davis

GFL Environmental - 072 - Americus - Transwaste
 361 McMath Mill Road
 Americus, GA
 US 31719

Contact: RICHARD HEINZERLING
 richard.heinzerling@gflenv.com

T: (229)924-3669

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: