



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Machine Id  
**HEX-234559**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0122644</b>	---	---
Sample Date		Client Info		<b>02 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2422</b>	---	---
Oil Age	hrs	Client Info		<b>2422</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>33</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**













Fuel content negligible.

Silicon	ppm	ASTM D5185m	>25	<b>17</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Fuel	%	ASTM D3524	>5	<b>0.2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.9</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		<b>4</b>	---	---
Boron	ppm	ASTM D5185m	0	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	60	<b>67</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	1010	<b>889</b>	---	---
Calcium	ppm	ASTM D5185m	1070	<b>1361</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1002</b>	---	---
Zinc	ppm	ASTM D5185m	1270	<b>1225</b>	---	---
Sulfur	ppm	ASTM D5185m	2060	<b>2898</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.00</b>	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>▲ 11.7</b>	---	---

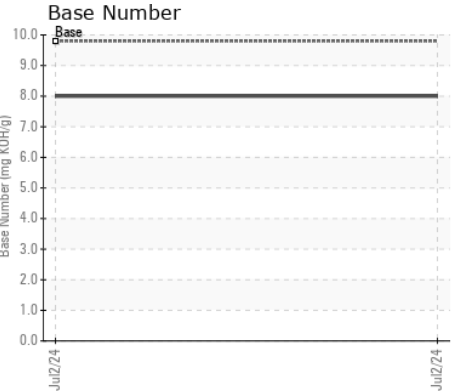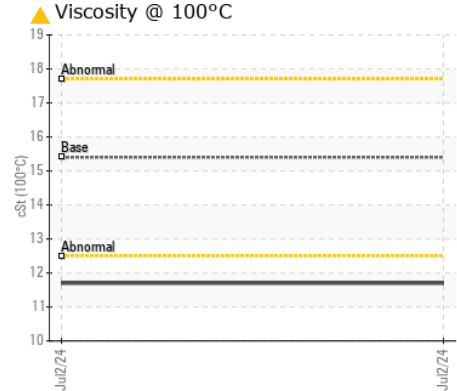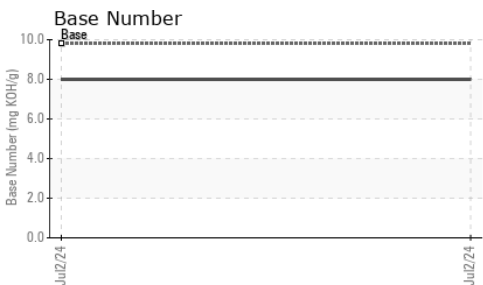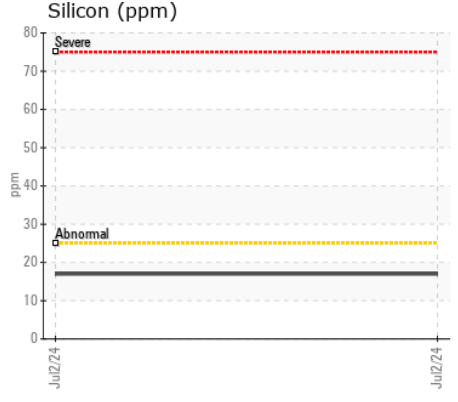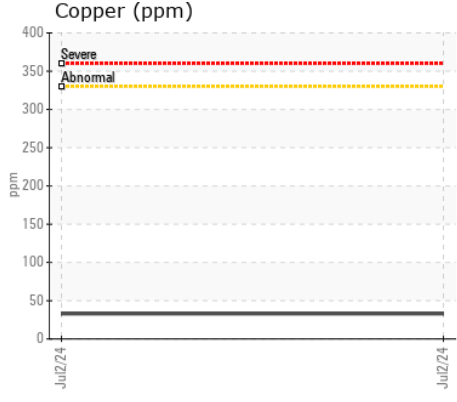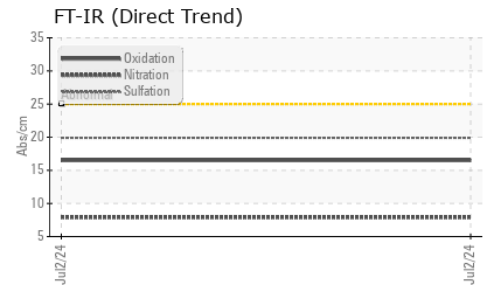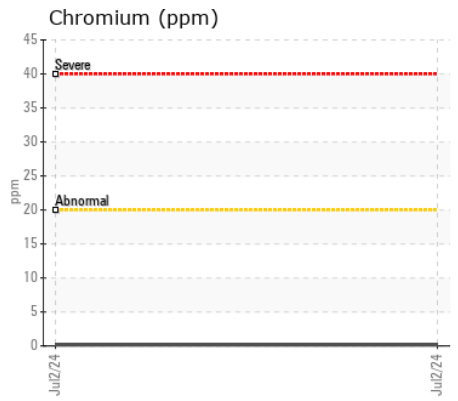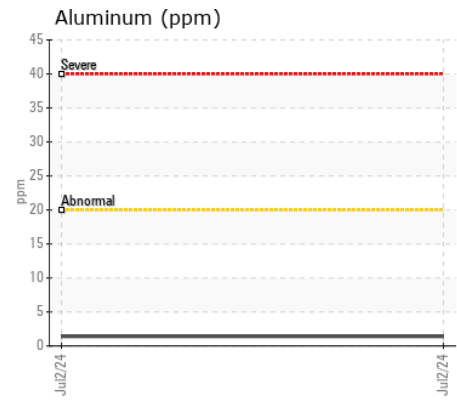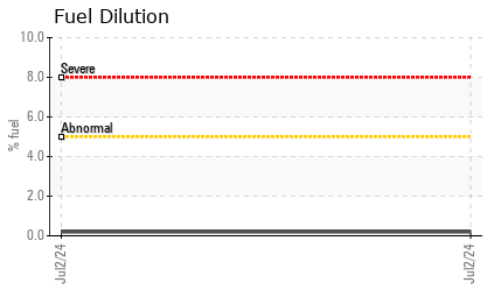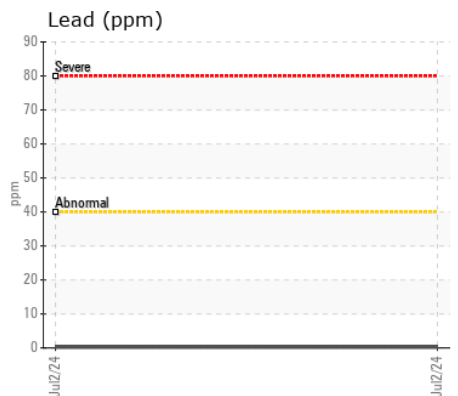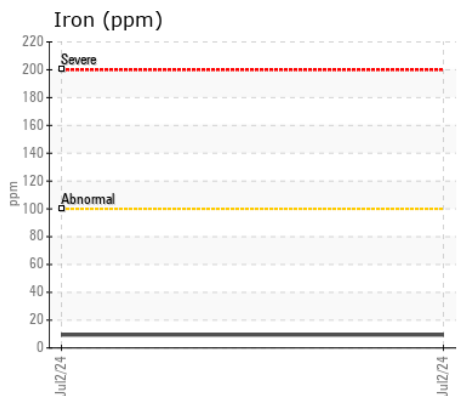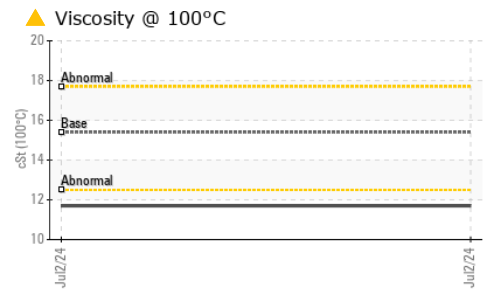

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122644 **Received** : 05 Jul 2024  
**Lab Number** : 06228851 **Tested** : 09 Jul 2024  
**Unique Number** : 11112344 **Diagnosed** : 09 Jul 2024 - Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**WIN Waste Innovations - Shop # - Taunton**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: Dave Wilson  
 dwilson1@win-waste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: